




# JABO

SUPPLY CORPORATION

PVC-THERMOPLASTIC

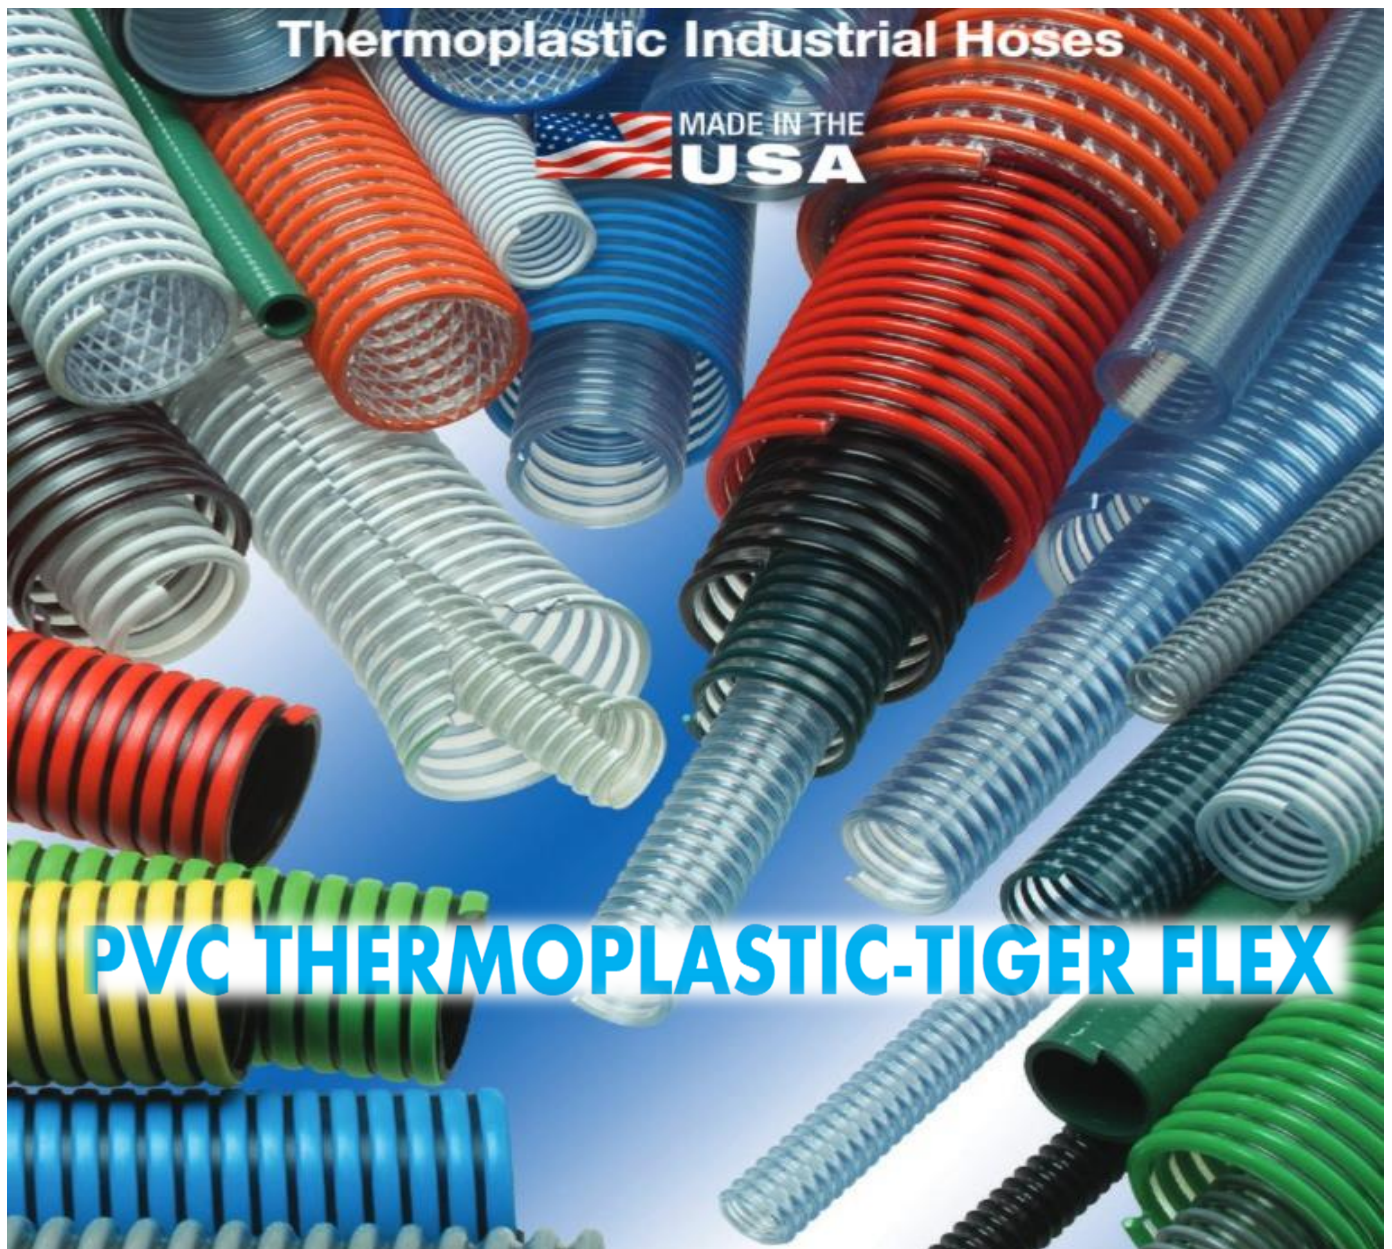

# JABO SUPPLY



## 5 LOCATIONS

### **PARKERSBURG, WV**

10085 Emerson Avenue 26102  
(304) 464-4400

### **MORGANFIELD, KY**

118 Jim Veatch Road, 42437  
(270) 389-3430

### **HUNTINGTON, WV**

209 Braley Street, 25705  
(304) 736-8333

### **NORTON, VA**

205 Hawthorne Drive, 24273  
(276) 679-1224

### **BEAVER, WV (BECKLEY)**

227 C&O Shop Road 25813  
(304-252-0000

SINCE 1964 SERVICE IS MORE THAN A PROMISE



## LIQUID SUCTION

## TIGERFLEX EPDM SUCTION HOSE

TG GREEN		
		
JABO PART#	SIZE	WORKING PSI 68F/104F
034-10211	1"	65/45
034-10214	1-1/4"	60/40
034-10215	1-1/2"	50/35
034-10220	2"	50/35
034-10225	2-1/2"	45/30
034-10230	3"	45/30
034-10240	4"	40/25
034-10242	6"	30/20
<b>*Non Stock - Call Jabo Supply</b>		

## Tiger™ Green TG™ Series EPDM Suction Hose

**General Applications:**

- Agriculture liquid fertilizers
- Irrigation lines
- Liquid manure handling
- Marine bilge discharge
- Pumps, rental and construction dewatering
- Pumps, trash
- Septic and wastewater handling
- Used frack solution removal
- Water suction – standard duty

**Construction:** EPDM tube with polyethylene helix.

**Service Temperature Range:**

-40°F (-40°C) to +160°F (+71°C)\*


**Nominal Specifications**

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
TG100	1	25.4	1.40	35.5	65	45	FULL	28	2	100	0.28
TG125	1-1/4	31.8	1.63	41.4	60	40	FULL	28	3	100	0.33
TG150	1-1/2	38.1	1.93	49.0	50	35	FULL	28	3	100	0.44
TG200	2	50.8	2.51	63.8	50	35	FULL	28	5	100	0.67
TG250	2-1/2	63.5	3.07	78.0	45	30	FULL	28	5.5	100	0.95
TG300	3	76.2	3.60	91.5	45	30	FULL	26	7	100	1.14
TG400	4	101.6	4.70	119.5	40	25	FULL	26	11.5	100	1.84
TG600	6	152.4	6.85	174.0	30	20	28	24	20	100/20	3.07

## LIQUID SUCTION

### CONTRACTOR GRADE PVC SUCTION HOSE

CLEAR WITH GREEN HELIX



EHCG

JABO PART#	SIZE	WORKING PSI 68F/104F
*	3/4"	100/60
*	1"	75/55
034-10529	1-1/4"	75/55
034-10530	1-1/2"	65/45
034-10531	2"	60/40
*	2-1/2"	60/40
034-10533	3"	60/35
034-10534	4"	50/30
*	5"	40/25
*	6"	35/20
*	8"	30/20
<b>*Non Stock - Call Jabo Supply</b>		

## EHGR / EHCW / EHCG Series

### Contractor Grade PVC Suction Hose

#### General Applications:

- Agricultural liquid fertilizer
- Air seeder lines
- Drain lines
- Irrigation lines
- Pumps, rental and construction dewatering
- Pumps, trash
- Rock dusting
- Water suction – standard duty

#### Construction:

PVC tube with rigid PVC helix.

#### Service Temperature:

-4°F (-20°C) to 150°F (+65°C)\*


## Nominal Specifications

Part Numbers			ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius (in)	Std. Length (ft)	Weight (lbs/ft)
Solid Green	Clear w/ White Helix	Clear w/ Green Helix	(in)	(mm)	(in)	(mm)	at 68°F	at 104°F	at 68°F	at 104°F			
EHGR075	EHCW075	EHCG075	3/4	19.1	1.00	25.5	100	60	28	26	3	100	0.18
EHGR100	EHCW100	EHCG100	1	25.4	1.22	31.0	75	55	28	26	3	100	0.24
EHGR125	EHCW125	EHCG125	1 1/4	31.7	1.50	38.0	75	55	28	24	4	100	0.31
EHGR150	EHCW150	EHCG150	1 1/2	38.1	1.76	44.6	65	45	28	24	5	100	0.38
EHGR200	EHCW200	EHCG200	2	50.8	2.32	59.0	60	40	28	24	6	100	0.56
EHGR250	EHCW250	EHCG250	2 1/2	63.5	2.81	71.5	60	40	26	22	7	100	0.67
EHGR300	EHCW300	EHCG300	3	76.2	3.37	85.5	60	35	26	20	9	100	0.99
EHGR400	EHCW400	EHCG400	4	101.6	4.39	111.5	50	30	20	16	14	100	1.46
—	EHCW500	EHCG500	5	127.8	5.69	144.6	40	25	26	20	9	100	2.28
EHGR600	EHCW600	EHCG600	6	152.4	6.63	168.5	35	20	24	16	30	100/20	2.84
EHGR800	EHCW800	EHCG800	8	203.2	8.86	225.0	30	20	22	14	35	20	5.63

## LIQUID SUCTION

CONTRACTOR GRADE PVC  
SUCTION HOSE

EHGR SERIES MSHA APPROVED



EHGR

JABO PART#	SIZE	PSI RATING 68F/104F
*	3/4"	100/60
*	1"	75/55
034-10479	1-1/4"	75/55
034-10480	1-1/2"	65/45
034-10500	2"	60/40
*	2-1/2"	60/40
034-10502	3"	60/35
034-10503	4"	50/30
*	5"	40/25
*	6"	35/20
*	8"	30/20
<i>*Non Stock - Call Jabo Supply</i>		

EHGR / EHCW / EHCW  
SeriesContractor Grade  
PVC Suction Hose

## General Applications:

- Agricultural liquid fertilizer
- Air seeder lines
- Drain lines
- Irrigation lines
- Pumps, rental and construction dewatering
- Pumps, trash
- Rock dusting
- Water suction – standard duty

## Construction:

PVC tube with rigid PVC helix.

## Service Temperature:

-4°F (-20°C) to 150°F (+65°C)\*

MSHA APPROVED

MADE IN THE  
USA

## Nominal Specifications

Part Numbers			ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius (in)	Std. Length (ft)	Weight (lbs/ft)
Solid Green	Clear w/ White Helix	Clear w/ Green Helix	(in)	(mm)	(in)	(mm)	at 68°F	at 104°F	at 68°F	at 104°F			
EHGR075	EHCW075	EHCW075	3/4	19.1	1.00	25.5	100	60	28	26	3	100	0.18
EHGR100	EHCW100	EHCW100	1	25.4	1.22	31.0	75	55	28	26	3	100	0.24
EHGR125	EHCW125	EHCW125	1 1/4	31.7	1.50	38.0	75	55	28	24	4	100	0.31
EHGR150	EHCW150	EHCW150	1 1/2	38.1	1.76	44.6	65	45	28	24	5	100	0.38
EHGR200	EHCW200	EHCW200	2	50.8	2.32	59.0	60	40	28	24	6	100	0.56
EHGR250	EHCW250	EHCW250	2 1/2	63.5	2.81	71.5	60	40	26	22	7	100	0.67
EHGR300	EHCW300	EHCW300	3	76.2	3.37	85.5	60	35	26	20	9	100	0.99
EHGR400	EHCW400	EHCW400	4	101.6	4.39	111.5	50	30	20	16	14	100	1.46
—	EHCW500	EHCW500	5	127.8	5.69	144.6	40	25	26	20	9	100	2.28
EHGR600	EHCW600	EHCW600	6	152.4	6.63	168.5	35	20	24	16	30	100/20	2.84
EHGR800	EHCW800	EHCW800	8	203.2	8.86	225.0	30	20	22	14	35	20	5.63

## LIQUID SUCTION

CONTRACTOR GRADE PVC  
SUCTION HOSE

## EHCW CLEAR WHITE HELIX



## EHGR / EHCW / EHCW Series

### Contractor Grade PVC Suction Hose

**General Applications:**

- Agricultural liquid fertilizer
- Air seeder lines
- Drain lines
- Irrigation lines
- Pumps, rental and construction dewatering
- Pumps, trash
- Rock dusting
- Water suction – standard duty

**Construction:**

PVC tube with rigid PVC helix.

**Service Temperature:**

-4°F (-20°C) to 150°F (+65°C)\*

JABO PART#	SIZE	PSI RATING 68F/104F
034-10400	3/4"	100/60
034-10410	1"	75/55
034-10411	1-1/4"	75/55
034-10413	1-1/2"	65/45
034-10414	2"	60/40
034-10415	2-1/2"	60/40
034-10416	3"	60/35
034-10417	4"	50/30
*	5"	40/25
*	6"	35/20
*	8"	30/20
<b>*Non Stock - Call Jabo Supply</b>		

## Nominal Specifications

Part Numbers			ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius (in)	Std. Length (ft)	Weight (lbs/ft)
Solid Green	Clear w/ White Helix	Clear w/ Green Helix	(in)	(mm)	(in)	(mm)	at 68°F	at 104°F	at 68°F	at 104°F			
EHGR075	EHCW075	EHCW075	3/4	19.1	1.00	25.5	100	60	28	26	3	100	0.18
EHGR100	EHCW100	EHCW100	1	25.4	1.22	31.0	75	55	28	26	3	100	0.24
EHGR125	EHCW125	EHCW125	1 1/4	31.7	1.50	38.0	75	55	28	24	4	100	0.31
EHGR150	EHCW150	EHCW150	1 1/2	38.1	1.76	44.6	65	45	28	24	5	100	0.38
EHGR200	EHCW200	EHCW200	2	50.8	2.32	59.0	60	40	28	24	6	100	0.56
EHGR250	EHCW250	EHCW250	2 1/2	63.5	2.81	71.5	60	40	26	22	7	100	0.67
EHGR300	EHCW300	EHCW300	3	76.2	3.37	85.5	60	35	26	20	9	100	0.99
EHGR400	EHCW400	EHCW400	4	101.6	4.39	111.5	50	30	20	16	14	100	1.46
—	EHCW500	EHCW500	5	127.8	5.69	144.6	40	25	26	20	9	100	2.28
EHGR600	EHCW600	EHCW600	6	152.4	6.63	168.5	35	20	24	16	30	100/20	2.84
EHGR800	EHCW800	EHCW800	8	203.2	8.86	225.0	30	20	22	14	35	20	5.63

## LIQUID SUCTION

## TIGERFLEX EPDM SUCTION HOSE

## TIGER TSD SERIES



JABO PART#	SIZE	PSI RATING 68F/104F
034-10250	1-1/4"	100/75
034-10251	1-1/2"	100/75
034-10252	2"	100/75
034-10254	3"	90/65
*	4"	75/50
<b>*Non Stock - Call Jabo Supply</b>		

NEW  
SIZE

## Tiger™ TSD™ Series EPDM Fabric Reinforced Suction & Discharge Hose

**General Applications:**

- Agriculture liquid fertilizers
- Agri-foam systems
- Liquid manure handling
- Pumps, rental and construction dewatering
- Pumps, trash
- Septic and wastewater handling
- Suction and discharge
- Water suction – heavy duty

**Construction:** Double-ply EPDM, polyester fabric reinforcement and polyethylene helix.

**Service Temperature Range:**

-40°F (-40°C) to +160°F (+71°C)\*

PVC-THERMOPLASTIC


**Nominal Specifications**

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
TSD125	1-1/4	31.8	1.70	43.2	100	75	FULL	28	3	100	0.41
TSD150	1-1/2	38.1	2.00	50.7	100	75	FULL	28	3	100	0.51
TSD200	2	50.8	2.54	64.5	100	75	FULL	28	5	100	0.73
TSD300	3	76.2	3.62	92.0	90	65	FULL	26	8	100	1.18
TSD400	4	101.6	4.53	121.0	75	50	28	26	9.5	100	1.40



## LIQUID SUCTION

## EDPM SUCTION HOSE

TBLU SERIES		
		
JABO PART#	SIZE	PSI RATING 68F/104F
034-10205	2"	50/35
*	3"	45/30
*	4"	40/25
<b>*Non Stock - Call Jabo Supply</b>		

## Tiger™ Red TRED™ Series

## Tiger™ Blue TBLU™ Series EPDM Suction Hoses

### General Applications:

- Agriculture liquid fertilizers
- Irrigation lines
- Liquid manure handling
- Marine bilge discharge
- Pumps, rental and construction dewatering
- Pumps, trash
- Septic and wastewater handling
- Used frack solution removal
- Water suction – standard duty




### Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
TRED/TBLU200	2	50.8	2.51	63.8	50	35	FULL	28	5	100	0.67
TRED/TBLU300	3	76.2	3.60	91.5	45	30	FULL	26	7	100	1.14
TRED/TBLU400	4	101.6	4.70	119.5	40	25	FULL	26	11.5	100	1.84



## LIQUID SUCTION

## HEAVY DUTY PVC SUCTION HOSE

G SERIES		
		
JABO PART#	SIZE	PSI RATING 68F/104F
*	1-1/2"	100/65
034-10205	2"	100/65
*	2-1/2"	70/48
*	3"	70/45
*	4"	60/40
*	6"	40/25
*	8"	30/20
<i>*Non Stock - Call Jabo Supply</i>		

## Tiger™ Suction

### F™/G™/S™ Series

#### Heavy Duty PVC Suction Hose


#### General Applications:

- Irrigation lines
- Pumps, rental and construction dewatering
- Pumps, trash
- Water suction – heavy duty

**Construction:** PVC tube with rigid PVC helix.

#### Service Temperature Range:

-4°F (-20°C) to +150°F (+65°C)\*

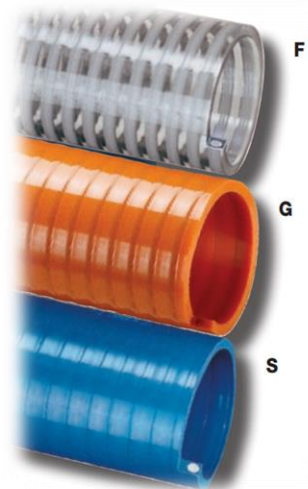

PVC-THERMOPLASTIC


## Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
F075	3/4	19.0	1.01	25.6	115	75	Full	28	3	100	0.21
F/G/S100	1	25.4	1.26	32.0	100	65	Full	28	3	100	0.27
F/S125	1-1/4	31.7	1.56	39.6	100	65	Full	26	4	100	0.36
F/G/S150	1-1/2	38.1	1.83	46.5	100	65	Full	26	5	100	0.48
F/G/S200	2	50.8	2.38	60.4	100	65	Full	26	7	100	0.71
F/G250	2-1/2	63.5	2.89	73.4	70	48	Full	26	8	100	0.96
F/G/S300	3	76.2	3.44	87.4	70	45	Full	26	10	100	1.25
F/G400	4	101.6	4.57	116.1	60	40	Full	26	15	100	1.95
F/G600	6	152.4	6.77	172.0	40	25	28	22	25	100/20	3.76
G800	8	203.2	8.90	226.1	30	20	28	18	30	20	6.00

NOTE: Service life may vary depending on operating conditions and type of material being conveyed.

## PETROLEUM

## TIGERFLEX VAPOR HOSE

TIGER TV SERIES		
		
JABO PART#	SIZE	PSI RATING 68F/104F
034-10280	2"	17/6
*	3"	11/5
*	4"	9/4
<b>*Non Stock - Call Jabo Supply</b>		

## Tigervapor™

### Vapor Recovery Hose

#### TV™ Series

**General Applications:**

- Tank truck vapor recovery

**Construction:**

Polyurethane (TPU) tube with rigid PVC helix and embedded grounding wire.

**Service Temperature Range:**

-40°F (-40°C) to +140°F (+60°C)\*

PVC-THERMOPLASTIC

## Nominal Specifications

Series Number	ID		OD^		Working Pressure (psi)		Vacuum Rating (in Hg)		Min Bending Radius (in at 68°F)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
TV202	2.02	51.3	2.46	62.5	17	6	21	12	3.0	100/60	0.51
TV303	3.03	77.0	3.57	90.7	11	5	18	10	3.5	100/60	0.78
TV404	4.04	102.6	4.61	117.1	9	4	13	8	4.5	100/60	1.10

## PETROLEUM

TDH SERIES		
		
JABO PART#	SIZE	PSI RATING 68F/104F
*	2"	75/40
*	3"	70/35
034-10300	4"	65/30
<b>*Non Stock - Call Jabo Supply</b>		

# Tigerdrop™ Clear

## Drop Hose

### TDH™ Series

#### Clear - "See-the-flow"



#### General Applications:

- Tank truck gravity drop fuel transfer

#### Construction:

Polyurethane (TPU) tube with polyester fabric reinforcement, rigid PVC helix and embedded grounding wire.

#### Service Temperature Range:

-40°F (-40°C) to +140°F (+60°C)\*


## Nominal Specifications

Series Number	ID		OD^		Working Pressure (psi)		Vacuum Rating (in Hg)		Min Bending Radius (in at 68°F)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
TDH202	2.02	51.3	2.66	67.6	75	40	Full	28	5	100/20	0.77
TDH303	3.03	77.0	3.78	96.0	70	35	Full	28	6	100/20	1.20
TDH404	4.04	102.6	4.82	122.4	65	30	Full	28	8	100/57/20	1.80

## ROCK DUSTING

**CONTRACTOR GRADE PVC  
SUCTION HOSE**

CLEAR WITH GREEN HELIX



EHCG

**EHGR / EHCW / EHCG  
Series**
**Contractor Grade  
PVC Suction Hose**
**General Applications:**

- Agricultural liquid fertilizer
- Air seeder lines
- Drain lines
- Irrigation lines
- Pumps, rental and construction dewatering
- Pumps, trash
- Rock dusting
- Water suction – standard duty

**Construction:**

PVC tube with rigid PVC helix.

**Service Temperature:**

-4°F (-20°C) to 150°F (+65°C)\*


JABO PART#	SIZE	PSI RATING 68F/104F
*	3/4"	100/60
*	1"	75/55
034-10529	1-1/4"	75/55
034-10530	1-1/2"	65/45
034-10531	2"	60/40
*	2-1/2"	60/40
034-10533	3"	60/35
034-10534	4"	50/30
*	5"	40/25
*	6"	35/20
*	8"	30/20
<b>*Non Stock - Call Jabo Supply</b>		

**Nominal Specifications**

Part Numbers			ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius (in)	Std. Length (ft)	Weight (lbs/ft)
Solid Green	Clear w/ White Helix	Clear w/ Green Helix	(in)	(mm)	(in)	(mm)	at 68°F	at 104°F	at 68°F	at 104°F			
EHGR075	EHCW075	EHCG075	3/4	19.1	1.00	25.5	100	60	28	26	3	100	0.18
EHGR100	EHCW100	EHCG100	1	25.4	1.22	31.0	75	55	28	26	3	100	0.24
EHGR125	EHCW125	EHCG125	1 1/4	31.7	1.50	38.0	75	55	28	24	4	100	0.31
EHGR150	EHCW150	EHCG150	1 1/2	38.1	1.76	44.6	65	45	28	24	5	100	0.38
EHGR200	EHCW200	EHCG200	2	50.8	2.32	59.0	60	40	28	24	6	100	0.56
EHGR250	EHCW250	EHCG250	2 1/2	63.5	2.81	71.5	60	40	26	22	7	100	0.67
EHGR300	EHCW300	EHCG300	3	76.2	3.37	85.5	60	35	26	20	9	100	0.99
EHGR400	EHCW400	EHCG400	4	101.6	4.39	111.5	50	30	20	16	14	100	1.46
—	EHCW500	EHCG500	5	127.8	5.69	144.6	40	25	26	20	9	100	2.28
EHGR600	EHCW600	EHCG600	6	152.4	6.63	168.5	35	20	24	16	30	100/20	2.84
EHGR800	EHCW800	EHCG800	8	203.2	8.86	225.0	30	20	22	14	35	20	5.63



## ROCK DUSTING

CONTRACTOR GRADE PVC  
SUCTION HOSEEHGR SERIES **MSHA APPROVED**

EHGR

JABO PART#	SIZE	PSI RATING
		68F/104F
*	3/4"	100/60
*	1"	75/55
034-10479	1-1/4"	75/55
034-10480	1-1/2"	65/45
034-10500	2"	60/40
*	2-1/2"	60/40
034-10502	3"	60/35
034-10503	4"	50/30
*	5"	40/25
*	6"	35/20
*	8"	30/20
<b>*Non Stock - Call Jabo Supply</b>		

**EHGR / EHCW / EHCG  
Series****Contractor Grade  
PVC Suction Hose****General Applications:**

- Agricultural liquid fertilizer
- Air seeder lines
- Drain lines
- Irrigation lines
- Pumps, rental and construction dewatering
- Pumps, trash
- Rock dusting
- Water suction – standard duty

**Construction:**

PVC tube with rigid PVC helix.

**Service Temperature:**

-4°F (-20°C) to 150°F (+65°C)\*

**MSHA APPROVED****Nominal Specifications**

Part Numbers			ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius (in)	Std. Length (ft)	Weight (lbs/ft)
Solid Green	Clear w/ White Helix	Clear w/ Green Helix	(in)	(mm)	(in)	(mm)	at 68°F	at 104°F	at 68°F	at 104°F			
EHGR075	EHCW075	EHCG075	3/4	19.1	1.00	25.5	100	60	28	26	3	100	0.18
EHGR100	EHCW100	EHCG100	1	25.4	1.22	31.0	75	55	28	26	3	100	0.24
EHGR125	EHCW125	EHCG125	1 1/4	31.7	1.50	38.0	75	55	28	24	4	100	0.31
EHGR150	EHCW150	EHCG150	1 1/2	38.1	1.76	44.6	65	45	28	24	5	100	0.38
EHGR200	EHCW200	EHCG200	2	50.8	2.32	59.0	60	40	28	24	6	100	0.56
EHGR250	EHCW250	EHCG250	2 1/2	63.5	2.81	71.5	60	40	26	22	7	100	0.67
EHGR300	EHCW300	EHCG300	3	76.2	3.37	85.5	60	35	26	20	9	100	0.99
EHGR400	EHCW400	EHCG400	4	101.6	4.39	111.5	50	30	20	16	14	100	1.46
—	EHCW500	EHCG500	5	127.8	5.69	144.6	40	25	26	20	9	100	2.28
EHGR600	EHCW600	EHCG600	6	152.4	6.63	168.5	35	20	24	16	30	100/20	2.84
EHGR800	EHCW800	EHCG800	8	203.2	8.86	225.0	30	20	22	14	35	20	5.63

## ROCKDUSTING

## CONTRACTOR GRADE SUCTION HOSE

CLEAR WITH WHITE HELIX



EHCW

## EHGR / EHCW / EHCW Series

### Contractor Grade PVC Suction Hose

**General Applications:**

- Agricultural liquid fertilizer
- Air seeder lines
- Drain lines
- Irrigation lines
- Pumps, rental and construction dewatering
- Pumps, trash
- Rock dusting
- Water suction – standard duty

**Construction:**

PVC tube with rigid PVC helix.

**Service Temperature:**

-4°F (-20°C) to 150°F (+65°C)\*

JABO PART#	SIZE	PSI RATING 68F/104F
034-10400	3/4"	100/60
034-10410	1"	75/55
034-10411	1-1/4"	75/55
034-10413	1-1/2"	65/45
034-10414	2"	60/40
034-10415	2-1/2"	60/40
034-10416	3"	60/35
034-10417	4"	50/30
*	5"	40/25
*	6"	35/20
*	8"	30/20
<b>*Non Stock - Call Jabo Supply</b>		

PVC-THERMOPLASTIC

## Nominal Specifications

Part Numbers			ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius (in)	Std. Length (ft)	Weight (lbs/ft)
Solid Green	Clear w/ White Helix	Clear w/ Green Helix	(in)	(mm)	(in)	(mm)	at 68°F	at 104°F	at 68°F	at 104°F			
EHGR075	EHCW075	EHCW075	3/4	19.1	1.00	25.5	100	60	28	26	3	100	0.18
EHGR100	EHCW100	EHCW100	1	25.4	1.22	31.0	75	55	28	26	3	100	0.24
EHGR125	EHCW125	EHCW125	1 1/4	31.7	1.50	38.0	75	55	28	24	4	100	0.31
EHGR150	EHCW150	EHCW150	1 1/2	38.1	1.76	44.6	65	45	28	24	5	100	0.38
EHGR200	EHCW200	EHCW200	2	50.8	2.32	59.0	60	40	28	24	6	100	0.56
EHGR250	EHCW250	EHCW250	2 1/2	63.5	2.81	71.5	60	40	26	22	7	100	0.67
EHGR300	EHCW300	EHCW300	3	76.2	3.37	85.5	60	35	26	20	9	100	0.99
EHGR400	EHCW400	EHCW400	4	101.6	4.39	111.5	50	30	20	16	14	100	1.46
—	EHCW500	EHCW500	5	127.8	5.69	144.6	40	25	26	20	9	100	2.28
EHGR600	EHCW600	EHCW600	6	152.4	6.63	168.5	35	20	24	16	30	100/20	2.84
EHGR800	EHCW800	EHCW800	8	203.2	8.86	225.0	30	20	22	14	35	20	5.63

