




JABO

SUPPLY CORPORATION

LAYFLAT HOSE

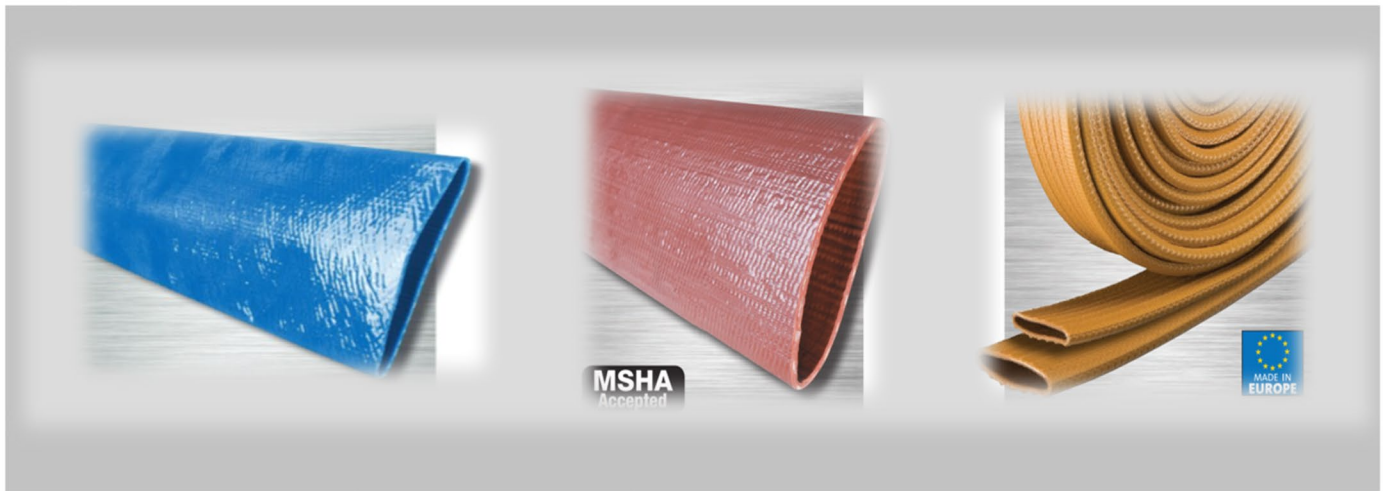

LAYFLAT HOSE

JABO CAN ASSEMBLE ANY HOSE IN OUR 9,000 SQ FT HOSE SHOP

JABO SUPPLY



5 LOCATIONS

PARKERSBURG, WV

10085 Emerson Avenue 26102
(304) 464-4400

MORGANFIELD, KY

118 Jim Veatch Road, 42437
(270) 389-3430

HUNTINGTON, WV

209 Braley Street, 25705
(304) 736-8333

NORTON, VA

205 Hawthorne Drive, 24273
(276) 679-1224

BEAVER, WV (BECKLEY)


227 C&O Shop Road 25813
(304-252-0000

SINCE 1964 SERVICE IS MORE THAN A PROMISE

LAYFLAT HOSE

BLUE LAYFLAT

VFL SERIES



VFL Series

General Purpose PVC Water Discharge Hose

General Applications:

- Agriculture
- Construction
- Equipment rental

Construction:

Spiral homogeneous PVC construction is ideal for construction and agriculture applications, and provides for minimal elongation.

Service Temperature Range:

-5°F (-20°C) to +170°F (+76°C)

JABO PART#	SIZE	PSI RATING
034-12750	3/4"	100
034-12760	1"	85
034-12770	1-1/4"	85
034-12780	1-1/2"	65
034-12820	2"	65
034-12830	3"	60
034-12840	4"	60
034-12860	6"	40
034-12861	8"	40

***Non Stock - Call Jabo Supply**

Nominal Specifications

Series Number	Size		Hose ID		Wall Thickness (in)	Working Pressure (psi) at 68°F	Burst Pressure (psi) at 68°F	Coil Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)					
VFL075	3/4	19.1	0.760	19.3	0.054	100	300	300	0.08
VFL100	1	25.4	1.024	26.0	0.051	85	255	300	0.10
VFL125	1 1/4	31.8	1.299	33.0	0.051	85	255	300	0.12
VFL150	1 1/2	38.1	1.614	41.0	0.045	65	195	300	0.14
VFL200	2	50.8	2.087	53.0	0.048	65	195	300/50	0.16
VFL300	3	76.2	3.071	78.0	0.055	60	180	300/50	0.30
VFL400	4	101.6	4.094	104.0	0.056	60	180	300	0.44
VFL600	6	152.4	6.102	155.0	0.061	40	120	300	0.70
VFL800	8	203.2	8.189	208.0	0.073	40	120	300	1.04


SOLD BY ROLL OR ASSEMBLY- JABO SUPPLY CAN ASSEMBLE LAYFLAT TO YOUR DESIRED LENGTH AND END CONNECTION . ASK YOUR JABO REPRESENTATIVES FOR MORE DETAIL

JABO SUPPLY CAN MAKE YOUR LAYFLAT HOSE AN ASSEMBLY WITH MOST FITTINGS WE SELL

LAYFLAT HOSE

RED LAYFLAT

IS SERIES HEAVY DUTY



JABO PART#	SIZE	PSI RATING
034-13015	1-1/2"	150
034-13020	2"	150
*	2-1/2"	150
034-13030	3"	150
034-13040	4"	125
034-13060	6"	115
034-13080	8"	70
*	10"	65
*Non Stock - Call Jabo Supply		

IS Series Premium Heavy Duty PVC Water Discharge Hose

General Applications:

- Agriculture
- Construction
- Industrial
- Mining
- Quarry

Construction:

Spiral homogeneous PVC construction is ideal for agriculture and mining applications, and provides for minimal elongation.

Service Temperature Range:

-5°F (-20°C) to +170°F (+76°C)

LAYFLAT HOSE

Nominal Specifications

Series Number	Size		Hose ID		Wall Thickness (in)	Working Pressure (psi) at 68°F	Burst Pressure (psi) at 68°F	Coil Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)					
IS150	1 1/2	38.1	1.610	40.9	0.087	150	450	300	0.23
IS200	2	50.8	2.090	53.1	0.091	150	450	300	0.32
IS250	2 1/2	63.5	2.579	65.5	0.095	150	450	300	0.41
IS300	3	76.2	3.090	78.5	0.098	150	450	300	0.52
IS400	4	101.6	4.098	104.1	0.110	125	375	300	0.76
IS600	6	152.4	6.161	156.5	0.118	115	345	300	1.21
IS800	8	203.2	8.150	207.0	0.122	70	210	300/100	1.62
IS1000	10	254.0	10.120	257.0	0.130	65	195	100	1.95

SOLD BY ROLL OR ASSEMBLY- JABO SUPPLY CAN ASSEMBLE LAYFLAT TO YOUR DESIRED LENGTH AND END CONNECTION . ASK YOUR JABO REPRESENTATIVES FOR MORE DETAIL

JABO SUPPLY CAN MAKE YOUR LAYFLAT HOSE AN ASSEMBLY WITH MOST FITTINGS WE SELL

LAYFLAT HOSE

YELLOW LAYFLAT

OF20Y SERIES



JABO PART#	SIZE	PSI RATING
*	1-1/2"	150
*	2"	150
*	2-1/2"	150
*	3"	150
034-12870	4"	125
034-12880	6"	115
*	8"	70
*	10"	65
*Non Stock - Call Jabo Supply		

OF20Y Series

Heavy Duty PVC/Nitrile Air & Discharge Hose

General Applications:

- Agriculture
- Air compressors
- Bulk powder discharge (excluding cement)
- Cable covering
- Dewatering
- Drainage
- Flotation booms
- High pressure liquid pumping
- Industrial washdown
- Irrigation
- Limited oil and chemical applications
- Watering

Construction:

Yellow PVC/Nitrile hose using an extruded through-the-weave process with circular woven high tenacity polyester reinforcement.

Service Temperature Range:

-22°F (-30°C) to +176°F (+80°C)

**Nominal Specifications**

Series Number	Size		Hose ID		Wall Thickness (in)	Working Pressure (psi) at 68°F		Burst Pressure (psi) at 68°F	Coil Length (ft)	Tensile Strength (lbs)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)		(liquid)	(air)				
OF20Y-075	3/4	19.1	0.866	22.0	0.080	480	360	1450	200/50	3,300	0.13
OF20Y-100	1	25.4	1.075	27.3	0.080	550	415	1660	200/50	4,150	0.17
OF20Y-150	1 1/2	38.1	1.555	39.5	0.110	305	225	910	200	6,600	0.30
OF20Y-200	2	50.8	2.106	53.5	0.120	305	225	910	200	8,250	0.43
OF20Y-300	3	76.2	3.031	77.0	0.120	260	160	650	200	18,750	0.61
OF20Y-400	4	101.6	4.035	102.5	0.120	300	—	750	200	28,650	0.84
OF20Y-600	6	152.4	6.063	154.0	0.160	290	—	725	100	51,600	1.68

SOLD BY ROLL OR ASSEMBLY- JABO SUPPLY CAN ASSEMBLE LAYFLAT TO YOUR DESIRED LENGTH AND END CONNECTION . ASK YOUR JABO REPRESENTATIVES FOR MORE DETAIL

JABO SUPPLY CAN MAKE YOUR LAYFLAT HOSE AN ASSEMBLY WITH MOST FITTINGS WE SELL

LAYFLAT HOSE

LAYFLAT HOSE

JABO #	SIZE
034-13100	1-1/2"
034-13101	2"
034-13102	3"
034-13103	4"
*Non Stock - Call Jabo Supply	

Nominal Specifications

Part Number	Size		Wall Thickness (in)	Working Pressure (psi) at 68°F	Coil Length (ft)	Weight (ea/lbs)
	(in)	(mm)				
LF150APLX50	1 1/2	38.1	0.059	70	50	9.00
LF200APLX50	2	50.8	0.063	65	50	13.50
LF300APLX50	3	76.2	0.067	60	50	21.50
LF400APLX50	4	101.6	0.067	50	50	30.00

Hose Ends: Aluminum pin lug couplings male and female



JABO #	SIZE
034-13110	1-1/2"
034-13111	2"
034-13112	3"
034-13114	4"

*NON STOCK CALL JABO

Nominal Specifications

Part Number	Size		Wall Thickness (in)	Working Pressure (psi) at 68°F	Coil Length (ft)	Weight (ea/lbs)
	(in)	(mm)				
LF150ACEX50	1 1/2	38.1	0.059	70	50	9.50
LF200ACEX50	2	50.8	0.063	65	50	13.60
LF300ACEX50	3	76.2	0.067	60	50	22.00
LF400ACEX50	4	101.6	0.067	50	50	31.50

Hose Ends: Aluminum quick couplings male x female



JABO #	SIZE
*	1-1/2"
*	2"
*	3"
*	4"

*NON STOCK CALL JABO

Nominal Specifications

Part Number	Size		Wall Thickness (in)	Working Pressure (psi) at 68°F	Coil Length (ft)	Weight (ea/lbs)
	(in)	(mm)				
LFR150APLX50	1 1/2	38.1	0.079	140	50	13.50
LFR200APLX50	2	50.8	0.079	128	50	18.00
LFR300APLX50	3	76.2	0.098	125	50	28.00
LFR400APLX50	4	101.6	0.110	125	50	40.50

Hose Ends: Aluminum pin lug couplings male and female



JABO #	SIZE
*	1-1/2"
*	2"
*	3"
*	4"

*NON STOCK CALL JABO

Nominal Specifications

Part Number	Size		Wall Thickness (in)	Working Pressure (psi) at 68°F	Coil Length (ft)	Weight (ea/lbs)
	(in)	(mm)				
LFR150ACEX50	1 1/2	38.1	0.079	140	50	14.00
LFR200ACEX50	2	50.8	0.079	128	50	18.50
LFR300ACEX50	3	76.2	0.098	125	50	28.50
LFR400ACEX50	4	101.6	0.110	125	50	41.00

Hose Ends: Aluminum quick couplings male x female



MOST COMMONLY USED HOSE ENDS

CAMLOCKS

MALE CAM X HOSE BARB



FEMALE CAM X HOSE BARB



Available in Zinc, SS, Polypropylene

PIPE THREADS

KING NIPPLE X HOSE BARB



Available in Zinc & SS

VICTAULIC



Available in 316 SS, Galvanized

FLANGES

FLOATING FLANGE



FIXED FLANGE



Available in Carbon Steel, SS 304, SS 316

CHICAGO STYLE COUPLING



Available in Zinc

FABRICATION





JABO SUPPLY CORPORATION

SUCTION & DISCHARGE

JABO CAN ASSEMBLE ANY HOSE IN OUR 9,000 SQ FT HOSE SHOP



SUCTION & DISCHARGE

JABO SUPPLY



5 LOCATIONS

PARKERSBURG, WV

10085 Emerson Avenue 26102
(304) 464-4400

MORGANFIELD, KY

118 Jim Veatch Road, 42437
(270) 389-3430

HUNTINGTON, WV


209 Braley Street, 25705
(304) 736-8333

NORTON, VA

205 Hawthorne Drive, 24273
(276) 679-1224

BEAVER, WV (BECKLEY)

227 C&O Shop Road 25813
(304-252-0000

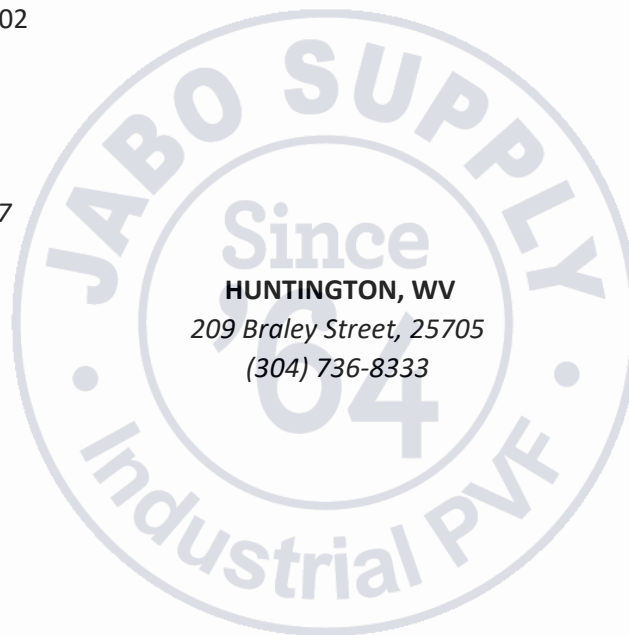

SINCE 1964 SERVICE IS MORE THAN A PROMISE

SUCTION & DISCHARGE

T202AA SUCTION & DISCHARGE

150 PSI



T202AA Series

150 PSI EPDM

General Purpose

Water S & D Hose

FOR APPLICATIONS INVOLVING
INDUSTRIAL ACID CHEMICALS AND
ALCOHOLS, PLEASE REFER TO T505OG
AND T509OE CHEMICAL HOSES

General Applications:

Suction and discharge of non-corrosive liquids for irrigation, construction, fertilizers and lasso acid solutions.

Construction:

Tube: Black EPDM.

Reinforcement: Spiraled high tensile textile cords with flexible steel helix wire.

Cover: Black EPDM – abrasion and ozone resistant.

Working Pressure:

Constant Pressure – 10 Bar (150 PSI)

Service Temperature Range:

-40°F (-40°C) to +212°F (+100°C)

SUCTION & DISCHARGE


JABO PART#	SIZE	LENGTH	PSI RATING
*	1"	100'	150
*	1-1/4"	100'	150
034-10015	1-1/2"	100'	150
034-10020	2"	100'	150
*	2-1/2"	100'	150
034-10030	3"	100'	150
034-10040	4"	100'	150
*	5"	20'	150
*	5"	50'	150
034-10060	6"	20'	150
*	6"	25'	150
034-10080	8"	20'	150
034-10082	8"	25'	150
*	10"	20'	150
*	12"	20'	150
*Non Stock - Call Jabo Supply			
PRICED BY FOOT			

Nominal Specifications

Series Number	ID (in)	ID (mm)	OD (in)	OD (mm)	Max Rec. WP (psi)	Vacuum HG (in)	Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
T202AA100	1	25	1.38	35	150	30	4	100	0.47
T202AA125	1 1/4	32	1.65	42	150	30	5	100	0.56
T202AA150	1 1/2	38	1.89	48	150	30	6	100	0.64
T202AA200	2	51	2.40	61	150	30	8	100	0.84
T202AA250	2 1/2	63	2.95	75	150	27	10	100	1.20
T202AA300	3	76	3.46	88	150	27	12	100	1.44
T202AA350	3 1/2	90	4.02	102	150	27	14	100	1.82
T202AA400	4	102	4.49	114	150	27	16	100	2.03
T202AA500	5	127	5.55	141	150	24	25	20/50/100	3.18
T202AA600	6	152	6.54	166	150	24	30	20/25/50/100	4.01
T202AA800	8	203	8.70	221	150	21	40	20/25	6.59
T202AA1000	10	254	10.71	272	150	18	50	20	9.03
T202AA1200	12	305	12.87	327	150	18	61	20	12.54

SUCTION & DISCHARGE

T223AA SUCTION & DISCHARGE

300PSI			
			
JABO PART#	SIZE	LENGTH	PSI RATING
*	2"	100'	300
*	2-1/2"	100'	300
034-10031	3"	100'	300
034-10041	4"	100'	300
034-10061	6"	100'	300
*	8"	40'	300
<i>*Non Stock - Call Jabo Supply</i>			
300 PSI EPDM Heavy Duty S&D Hose			
PRICED BY FOOT			

Working Pressure:

Constant Pressure – 20 Bar (300 PSI)

Service Temperature Range:

-22°F (-30°C) to 176°F (+80°C)

T223AA

300 PSI EPDM

Heavy Duty S & D Hose

FOR APPLICATIONS INVOLVING
INDUSTRIAL ACID CHEMICALS AND
ALCOHOLS, PLEASE REFER TO T505OG
AND T509OE CHEMICAL HOSES

General Applications:

Heavy duty water suction and discharge applications for irrigation, agriculture, mining and construction. Designed for long service life in heavy duty applications for water suction and delivery service.

Construction:**Tube:** Black conductive EPDM.**Reinforcement:** Spiraled high tensile textile cords with flexible steel helix wire.**Cover:** Black conductive EPDM – abrasion and ozone resistant.**Nominal Specifications**

Series Number	ID (in)	ID (mm)	OD (in)	OD (mm)	Max Rec. WP (psi)	Vacuum HG (in)	Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
T223AA200	2	51	2.48	63	300	30	8	100	0.955
T223AA250	2 1/2	63	3.03	77	300	27	10	100	1.395
T223AA300	3	76	3.54	90	300	27	12	100	1.715
T223AA400	4	102	4.57	116	300	27	16	100	2.350
T223AA600	6	152	6.61	168	300	24	24	100	4.580
T223AA800	8	203	8.86	225	300	21	32	40	7.335

MOST COMMONLY USED HOSE ENDS

SUCTION & DISCHARGE

CAMLOCKS

MALE CAM X HOSE BARB



FEMALE CAM X HOSE BARB



Available in Zinc, SS, Polypropylene

PIPE THREADS

KING NIPPLE X HOSE BARB



Available in Zinc & SS

VICTAULIC



Available in 316 SS, Galvanized

FLANGES

FLOATING FLANGE



FIXED FLANGE



Available in Carbon Steel, SS 304, SS 316

CHICAGO STYLE COUPLING



Available in Zinc

FABRICATION





JABO SUPPLY CORPORATION

GENERAL PURPOSE HOSE

JABO CAN ASSEMBLE ANY HOSE IN OUR 9,000 SQ. FT. HOSE SHOP



GENERAL PURPOSE

JABO SUPPLY



5 LOCATIONS

PARKERSBURG, WV

10085 Emerson Avenue 26102
(304) 464-4400

MORGANFIELD, KY

118 Jim Veatch Road, 42437
(270) 389-3430

HUNTINGTON, WV

209 Braley Street, 25705
(304) 736-8333

NORTON, VA

205 Hawthorne Drive, 24273
(276) 679-1224

BEAVER, WV (BECKLEY)

227 C&O Shop Road 25813
(304-252-0000

SINCE 1964 SERVICE IS MORE THAN A PROMISE

GENERAL PURPOSE

RED RUBBER

GENERAL PURPOSE

GENERAL PURPOSE A/W

AKA RED RUBBER

**COMMON RED RUBBER ENDS****CHICAGO STYLE COUPLING*****Non Stock - Call Jabo Supply**

**CAN BE SOURCED
FROM DIFFERENT
MANUFACTURES**



JABO SUPPLY CORPORATION

OIL & AIR HOSE



SEE BRASS PUSHON FITTINGS

OIL & AIR

JABO SUPPLY



5 LOCATIONS

PARKERSBURG, WV

10085 Emerson Avenue 26102
(304) 464-4400

MORGANFIELD, KY

118 Jim Veatch Road, 42437
(270) 389-3430

HUNTINGTON, WV

209 Braley Street, 25705
(304) 736-8333

NORTON, VA

205 Hawthorne Drive, 24273
(276) 679-1224

BEAVER, WV (BECKLEY)

227 C&O Shop Road 25813
(304-252-0000

SINCE 1964 SERVICE IS MORE THAN A PROMISE

OIL & AIR

INSTA GRIP 300 PUSH ON HOSE

300 PSI



JABO PART#	SIZE	WORKING PSI 68F/104F
*	3/16"	300
034-15190	1/4"	300
034-15194	3/8"	300
034-15198	1/2"	300
034-15200	5/8"	300
034-15201	3/4"	300
*Non Stock - Call Jabo Supply		

GENERAL APPLICATION

For use with push-on fittings at working pressures of 300 psi. For low-pressure hydraulic and pneumatic systems such as shop air systems, general industrial, maintenance and automotive assembly applications. Non-conductive, minimum electrical resistance, greater than one (1) megohm per inch of hose length at 1000 Volts DC. MSHA approved covers.

Construction:

Construction Tube: Chemivic™ oil and heat-resistant synthetic rubber, ARPM class A (high oil resistance) [Silicone is not used in the manufacturing of this hose.]

Service Temperature Range

-40°F to 210°F (-40°C to 99°C)

**MADE IN THE
USA**

SEE PUSH ON FITTINGS IN HOSE FITTING/BRASS FITTINGS/PUSHON FITTINGS



PUSH ON BARB FITTINGS

PUSH ON BARB FITTINGS

BRASS PUSH ON HOSE
FITTINGS

Typical Application: Low Pressure Air, Fuel, Lube, and Oil Lines

- Pressure determined by tube material and hardness. Midland Parts have been tested to max 150 PSI.

Advantages: Easy assembly. No clamps needed!!

• **Assembly Instructions**

- 1- Lubricate insert.
- 2- Hold hose at angle to insert over first barb.
- 3- Continue to push straight on until hose is seated under protective plastic cap. Keep hands back from hose end area so that hose can expand.

• **Disassembling Instructions**

- 1- Split hose. Do not cut completely through hose. Sealing edge of barb could be damaged.
- 2- Bend hose and remove with a quick pull.

See lead free section for lead free push-on barb fittings. **Stainless steel available at the end of this section.**

Actual Profile of Push On Barbs



JABO SUPPLY



5 LOCATIONS

PARKERSBURG, WV

10085 Emerson Avenue 26102
(304) 464-4400

MORGANFIELD, KY

118 Jim Veatch Road, 42437
(270) 389-3430

HUNTINGTON, WV

209 Braley Street, 25705
(304) 736-8333

NORTON, VA

205 Hawthorne Drive, 24273
(276) 679-1224

BEAVER, WV (BECKLEY)

227 C&O Shop Road 25813
(304-252-0000

SINCE 1964 SERVICE IS MORE THAN A PROMISE

BRASS PUSH ON HOSE FITTING

HOSE BARB X MALE NPT

PUSH ON RIGID



JABO PART#	SIZE
038-10786	1/4X1/8"
038-10787	1/4"
*	1/4x3/8"
*	1/4x1/2"
*	5/16 X 1/8
*	5/16 X 1/4
*	3/8 X 1/8
038-10789	3/8x1/4"
038-10790	3/8"
*	3/8x1/2"
*Non Stock-Call Jabo Supply	

HOSE BARB X SWIVEL
MALE NPT

PUSH ON SWIVEL



JABO PART#	SIZE
038-10820	1/4X1/8"
038-10813	1/4"
*	1/4x3/8"
*	1/4x1/2"
*	5/16 X 1/8
*	5/16 X 1/4
*	3/8 X 1/8
*	3/8x1/4"
038-10815	3/8"
*	3/8x1/2"
*	3/8x3/4"
*Non Stock-Call Jabo Supply	

HOSE BARB X FEMALE NPT
SWIVEL GASKET

FEMALE NPT THREADS



JABO PART#	SIZE
*	1/4 X 1/8"
*	1/4"
*	3/8 X 1/4"
*	3/8"
*	3/8 X 1/2"
*	1/2"
*	3/4"
*Non Stock-Call Jabo Supply	

BRASS PUSH ON HOSE
FITTINGS

BRASS PUSH ON HOSE FITTING

BRASS PUSH ON HOSE
FITTINGSHOSE BARB X HOSE
BARB


PUSH ON MENDER/SPLICER



JABO PART#	SIZE
*	1/8"
038-10832	1/4"
038-10833	3/8"
038-10834	1/2"
038-10835	5/8"
038-10836	3/4"
*Non Stock-Call Jabo Supply	

HOSE BARB X RIGID FIP
ADAPTER

RIGID FEMALE ADAPTER



JABO PART#	SIZE
*	1/8"
*	1/4"
*	3/8"
*	1/2"
*	3/4"
*Non Stock-Call Jabo Supply	

HOSE BARB X MIP 90

MALE 90 ELBOW




JABO PART#	SIZE
*	1/4 X 1/8"
038-10842	1/4"
038-10843	5/16 X 1/8"
038-10844	5/16 X 1/4"
*	3/8 X 1/8"
*	3/8 X 1/4"
038-10845	3/8"
*	3/8 X 1/2"
*	1/2 X 3/8"
038-10847	1/2"
*	5/8 X 1/2"
*	3/4 X 1/2"
*	3/4"
*Non Stock-Call Jabo Supply	

BRASS PUSH ON HOSE FITTING

PUSH ON HOSE BARB X
OUTSIDE DIAMETER

RIGID	
	
JABO PART#	SIZE
*	1/4 X 3/16"
*	1/4 X 1/4"
*	1/4 X 5/16"
*	5/16 X 5/16"
*	3/8 X 3/8"
*	3/8 X 1/2"
*	1/2 X 1/2"
*	5/8 X 5/8"
*	3/4 X 3/4"
<i>*Non Stock-Call Jabo Supply</i>	

PUSH ON BARB X MALE
FLARE SAE

MALE SAE FLARE	
	
JABO PART#	SIZE
*	1/4"
*	1/4 X 5/16"
*	5/16"
*	3/8 X 5/16"
*	3/8"
*	1/2"
*	5/8"
*	3/4"
<i>*Non Stock-Call Jabo Supply</i>	

PUSH ON BARB X MALE JIC
FLARE

BRASS JIC FLARE	
	
JABO PART#	SIZE
*	1/4"
*	1/4 X 5/16"
*	1/4X3/8"
*	3/8"
*	1/2"
*	5/8"
*	3/4"
<i>*Non Stock-Call Jabo Supply</i>	

BRASS PUSH ON HOSE
FITTINGSPUSH ON HOSE BARB X
FEMALE 45/37 DEG

SAE/JIC Dual 45 Deg/37 Deg	
	
JABO PART#	SIZE
*	1/4"
*	1/4 X 5/16"
*	5/16"
*	3/8 X 5/16"
*	3/8 X 1/2"
*	1/2"
*	1/2 X 5/8"
*	5/8 X 1/2"
038-10870	5/8"
*	3/4 X 5/8"
<i>*Non Stock-Call Jabo Supply</i>	

PUSH ON HOSE BARB X
FEMALE FLARE SWIVEL

45 DEG SAE FLARE SWIVEL	
	
JABO PART#	SIZE
038-10897	1/4"
*	1/4 X 5/16"
*	1/4 X 3/8"
*	5/16 "
*	5/16 X 3/8"
038-10899	3/8"
*	3/8 X 1/2"
*	1/2 X 3/8"
038-10902	1/2"
*	5/8"
038-10905	3/4"
<i>*Non Stock-Call Jabo Supply</i>	

PUSH ON HOSE BARB X
FEMALE JIC FLARE SWIVEL

F 37 DEGREE JIC FLARE SWIVEL	
	
JABO PART#	SIZE
038-10909	1/4"
*	1/4 X 3/8"
*	5/16 X 3/8"
038-10910	3/8"
038-10911	1/2"
*	5/8"
038-10913	3/4"
*	1"
<i>*Non Stock-Call Jabo Supply</i>	

BRASS PUSH ON HOSE FITTING

PUSH ON HOSE BARB X
MALE INVERTED FLARE

INVERTED FLARE MALE SWIVEL



JABO PART#	SIZE
*	1/4" X 3/16"
038-10916	1/4"
*	1/4" X 5/16"
*	5/16"
*	5/16" X 3/8"
*	3/8 X 5/16
038-10918	3/8"
039-10920	1/2"
038-10923	5/8"

*Non Stock-Call Jabo Supply

PUSH ON HOSE BARB X
FEMALE INVERTED FLARE

INVERTED FLARE FEMALE




JABO PART#	SIZE
*	1/4" X 3/16"
*	1/4"
*	1/4" X 5/16"
*	5/16"
*	3/8" X 5/16"
*	3/8"
*	1/2"

*Non Stock-Call Jabo Supply

PUSH ON HOSE BARB X FEMALE
BALL SEAT

FEMALE BALL SET



JABO PART#	SIZE
*	1/4" X 1/8"
*	1/4"
*	1/4" X 3/8"
*	3/8" X 1/4"
*	3/8"
*	3/8" X 1/2"
*	1/2"
*	1/2"X3/4"
*	3/4"

*Non Stock-Call Jabo Supply

BRASS PUSH ON HOSE
FITTINGSSAE/JIC 37 DEG/45 DEG
FEMALE SWIVEL 90 DEGREE

PUSH ON FITTING



JABO PART#	SIZE
*	1/4
*	3/8
*	1/2
*	3/4

*Non Stock-Call Jabo Supply

INSTA GRIP 300

HOSE FOR PUSH ON FITTINGS



JABO PART#	SIZE
*	3/16"
034-15190	1/4"
034-15194	3/8"
034-15198	1/2"
034-15200	5/8"
034-15201	3/4"

*Non Stock-Call Jabo Supply





JABO SUPPLY CORPORATION

PETROLEUM HOSE

JABO CAN ASSEMBLE ANY HOSE IN OUR 9,000 SQ. FT. HOSE SHOP



PETROLEUM HOSE



JABO SUPPLY



5 LOCATIONS

PARKERSBURG, WV

10085 Emerson Avenue 26102
(304) 464-4400

MORGANFIELD, KY

118 Jim Veatch Road, 42437
(270) 389-3430

HUNTINGTON, WV

209 Braley Street, 25705
(304) 736-8333

NORTON, VA

205 Hawthorne Drive, 24273
(276) 679-1224

BEAVER, WV (BECKLEY)


227 C&O Shop Road 25813
(304-252-0000

SINCE 1964 SERVICE IS MORE THAN A PROMISE

PETROLEUM

T604AA PETROLEUM HOSE

OIL RETURN HOSE



JABO PART#	SIZE	WORKING PSI 68F/104F
*	3/4"	300
034-10112	1"	250
034-10113	1-1/4"	200
*	1-1/2"	150
*	2"	100
*NON Stock-Call Jabo Supply		

T604AA Series

Flexor – SAE 100 R4 Oil Return Hose

General Applications:

Low pressure return lines or suction lines with half the bend radius requirements of SAE J517 100 R4, service with petroleum based hydraulic fluids, water-glycol and water-fire resistant hydraulic fluids, oil, lubricants, crude oil, fuel oils and water.

Construction:

Tube: Black conductive NBR.

Reinforcement: High tensile textile cords with flexible steel helix wire.

Cover: Black CR – oil, fuel, weather, ozone and abrasion-resistant.

Service Temperature Range:

-40° F (-40° C) to +212° F (+100° C) constant operation

Maximum operating temperature: +257° F (+125° C).

Air maximum temperature: 175° F (80° C).

Note: Operating temperatures in excess of 212° F (+100° C) may materially reduce the life of the hose.


Nominal Specifications

Series Number	ID (in)	ID (mm)	OD (in)	OD (mm)	Max Rec. WP (psi)	Vacuum HG (in)	Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
T604AA075	3/4	19	1.14	29	300	30	2 1/4	100	0.41
T604AA100	1	25	1.38	35	250	30	3	100	0.52
T604AA125	1 1/4	32	1.65	42	200	30	3 3/4	100	0.61
T604AA150	1 1/2	38	1.89	48	150	30	4 1/2	100	0.70
T604AA200	2	51	2.40	61	100	30	6	100	0.90

PETROLEUM

T605AA PETROLEUM HOSE

OIL RETURN HOSE



JABO PART#	SIZE	WORKING PSI
*	3/4"	150
*	1"	150
*	1-1/4"	150
034-10119	1-1/2"	150
034-10120	2"	150
034-10125	2-1/2"	150
034-10130	3"	150
034-10140	4"	150
034-10142	6"	150
*	8"	150

***Non Stock - Call Jabo Supply**

T605AA Series

150 PSI Black Petroleum S & D Hose

General Applications:

For suction and discharge applications in truck and tank car transfer of gasoline, oil and other petroleum-based products with up to 50% aromatic content.

Construction:

Tube: Black conductive NBR.

Reinforcement: High tensile textile cords with flexible steel helix wire.

Cover: Black CR – abrasion, ozone and hydrocarbon resistant.

Working Pressure:

Constant Pressure – 10 Bar (150 PSI)

Service Temperature Range:

-22°F (-30°C) to +176°F (+80°C)

T605 IS NOT RECOMMENDED FOR USE ON A REEL.


Nominal Specifications

Series Number	ID (in)	ID (mm)	OD (in)	OD (mm)	Max Rec. WP (psi)	Vacuum HG (in)	Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
T605AA075	3/4	19	1.14	29	150	30	3	100	0.41
T605AA100	1	25	1.38	35	150	30	4	100	0.52
T605AA125	1 1/4	32	1.65	42	150	30	5	100	0.61
T605AA150	1 1/2	38	1.89	48	150	30	6	100	0.71
T605AA200	2	51	2.40	61	150	30	8	100	0.91
T605AA250	2 1/2	63	2.95	75	150	27	10	100	1.42
T605AA300	3	76	3.54	90	150	27	12	100	1.75
T605AA400	4	102	4.65	118	150	27	16	100	2.56
T605AA600	6	152	6.69	170	150	24	24	20/100	4.95
T605AA800	8	203	8.86	225	150	21	32	20	7.87

PETROLEUM

NDH

NDH WITH GROUND WIRE



JABO PART#	SIZE	WORKING PSI 68F/104F
*	2"	75/40
034-10160	3"	70/35
034-10162	4"	65/30
*Non Stock - Call Jabo Supply		

Tigerdrop™ NDH™

Drop Hose
NDH™ Series
Black static
dissipating tube

General Applications:

- Tank truck gravity drop fuel transfer

Construction:

Specially blended nitrile (NBR) rubber tube with polyester fabric reinforcement, rigid PVC helix and embedded grounding wire.

Service Temperature Range:

-10°F (-23.3°C) to +150°F (+65.5°C)*


PETROLEUM HOSE

Nominal Specifications

Series Number	ID		OD^		Working Pressure (psi)		Vacuum Rating (in Hg)		Min Bending Radius (in at 68°F)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
NDH202	2.02	51.3	2.60	66.0	75	40	Full	27	5	100/20	0.80
NDH303	3.03	77.0	3.69	93.7	70	35	Full	27	6	100/20	1.24
NDH404	4.04	102.6	4.78	121.4	65	30	Full	27	8	100/57/20	2.00

PETROLEUM

634AA / TR4XF EXTRA FLEXIBLE

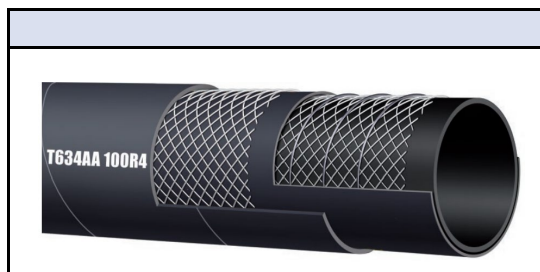

JABO PART#	SIZE	WORKING PRESSURE
035-20340	3/4"	300
035-20341	1"	250
*	1-1/4"	200
*	1-1/2"	150
*	2"	100
*	2-1/2"	60
*	3"	60
*Non Stock - Call Jabo Supply		

Construction:

Tube – Black, conductive NBR.

Reinforcement – Textile reinforced with four spiral wire helix to prevent collapsing.

Cover – Black CR... oil, fuel, weather, ozone and abrasion-resistant.

T634AA – Textile reinforced with four spiral wire helix to prevent collapsing

Meets or exceeds SAE 100R4

General Applications:

Low pressure return lines or suction lines with half the bend radius requirements of SAE J517 100R4, service with petroleum based hydraulic fluids, water-glycol and water-fire resistant hydraulic fluids, oil, lubricants, crude oil, fuel oils and water.

Service Temperature Range:

-40°F (-40°C) to +212°F (+100°C) constant operation.

Maximum operating temperature:

+257°F (+125°C)

Air maximum temperature: +175°F (+80°C)

Note: Operating temperatures in excess of +212°F (+100°C) may materially reduce the life of the hose.

Branding:

ALFAGOMMA – Italy – T634 (psi) - SAE 100R4 - (SIZE) - Date

Nominal Specifications

Series Number	Size Code	ID		OD		Max. Working Pressure [†] (psi)	Min. Bend. Radius		Weight (lbs/ft)	Coupling Recommendations	
		(in)	(mm)	(in)	(mm)		(in)	(mm)		Two-Piece	Ferrule Non-Skive
TR4XF	12	3/4	19.1	1.18	30.0	300	1.5	38.1	0.41	AFX	
TR4XF	16	1	25.4	1.42	36.0	250	2.0	50.8	0.51	AFX	
TR4XF	20	1 1/4	31.8	1.69	43.0	200	2.5	63.5	0.62	AFX	
TR4XF	24	1 1/2	38.1	1.93	49.0	150	3.0	76.2	0.72	AFX	
TR4XF	32	2	50.8	2.44	62.0	100	4.0	101.6	0.93	AFX	
TR4XF	40	2 1/2	63.0	2.99	76.0	60	4.9	125.0	1.47		
TR4XF	48	3	76.0	3.50	89.0	60	5.9	152.0	1.75		

MOST COMMONLY USED HOSE ENDS

CAMLOCKS

MALE CAM X HOSE BARB



FEMALE CAM X HOSE BARB



Available in Zinc, SS, Polypropylene

PIPE THREADS

KING NIPPLE X HOSE BARB



Available in Zinc & SS

VICTAULIC



Available in 316 SS, Galvanized

FLANGES

FLOATING FLANGE



FIXED FLANGE



Available in Carbon Steel, SS 304, SS 316

CHICAGO STYLE COUPLING



Available in Zinc

FABRICATION





JABO SUPPLY CORPORATION

NYLON AIR BRAKE TUBING



NYLON DOT AIR BRAKE TUBING

CAN BE SOURCED FROM DIFFERENT MANUFACTURES

JABO SUPPLY



5 LOCATIONS

PARKERSBURG, WV

10085 Emerson Avenue 26102
(304) 464-4400

MORGANFIELD, KY

118 Jim Veatch Road, 42437
(270) 389-3430

HUNTINGTON, WV

209 Braley Street, 25705
(304) 736-8333

NORTON, VA

205 Hawthorne Drive, 24273
(276) 679-1224

BEAVER, WV (BECKLEY)

227 C&O Shop Road 25813
(304-252-0000

SINCE 1964 SERVICE IS MORE THAN A PROMISE

NYLON DOT AIR BRAKE TUBING



NYLON AIR BRAKE TUBING

251-NON -REINFORCED

JABO PART#	SIZE	LENGTH	KURIYAMA	MIDLAND	COLOR
036-10000	1/8"	100'	251 BK-02	38950	BLACK
036-10002	5/32"	100'	251BK-02.5	38951	BLACK
036-10004	3/16"	100'	251BK-03	38953	BLACK
036-15251	1/4"	100'	251BK-04	38952	BLACK
036-15252	5/16"	100'	251BK-05	38954	BLACK
Can Be Sourced From Different Manufactures					



151- REINFORCED

JABO PART#	SIZE	LENGTH	KURIYAMA	MIDLAND	COLOR
036-15302	3/8"	100'	151BK-06	NA	BLACK
036-15303	1/2"	100'	151BK-08	NA	BLACK
036-15304	5/8"	100'	151BK-10	NA	BLACK
036-15305	3/4"	100'	151BK-12	NA	BLACK
Can Be Sourced From Different Manufactures					

**CAN BE SOURCED
FROM DIFFERENT
MANUFACTURES**

PUSH IN AIR FITTINGS



PUSH-IN/ PUSH-TO-CONNECT FITTINGS

BRASS PUSH-IN



NICKEL PLATED BRASS PUSH-IN



NICKEL PLATED W/ NICKEL COLLET



STAINLESS STEEL PUSH-IN



DOT COMPOSITE PUSH-IN



METRIC N/P BRASS PUSH-IN



COMPOSITE BODY PUSH-IN



COMPOSITE BODY METRIC PUSH-IN



FDA PLASTIC PUSH-IN



DOT BRASS PUSH-IN



Listed above are the push in fittings that are available from the manufacture. Jabo supply stocks the DOT Brass Push in fittings . If another material is needed please contact your Jabo Sales Representative

JABO SUPPLY



5 LOCATIONS

PARKERSBURG, WV

10085 Emerson Avenue 26102
(304) 464-4400

MORGANFIELD, KY

118 Jim Veatch Road, 42437
(270) 389-3430

HUNTINGTON, WV

209 Braley Street, 25705
(304) 736-8333

NORTON, VA

205 Hawthorne Drive, 24273
(276) 679-1224

BEAVER, WV (BECKLEY)

227 C&O Shop Road 25813
(304-252-0000

SINCE 1964 SERVICE IS MORE THAN A PROMISE

COMPOSITE PUSH IN AIR FITTINGS

COMPOSITE PUSH IN AIR
FITTINGS

SPECIFICATIONS	
Fluid admitted	Air
Working pressure range	0-150 PSI (10BAR)
Min. Burst pressure	340PSI (23BAR)
Working Temperature range	0°F ~160°F

The latest generation of composite material is used in the body construction in addition to brass on threaded components and stainless steel on the tube gripper.

- Tolerance
+/- .02 on all dimensions. Dimension data can change without notice. Please call us when dimensions are critical.

MATERIALS OF CONSTRUCTION:		
1	Body	Composite Polyacetal (hemopolymer, copolymer)
2	Body	Brass
3	Tube Release	Acetal Resin
4	Retainer	Brass
5	Gripper Ring	Stainless Steel
6	Spacer	Brass
7	O-Ring	NBR 70
8	Threads	Brass w/ white sealant

PART NUMBERS ARE
MANUFACTURE PART NUMBERS

PLEASE TELL YOUR CUSTOMER
SERVICE REPRESENTATIVE
MANUFACTURE AND PART #

PART NUMBERS ARE MANUFACTURE NUMBERS

COMPOSITE PUSH IN

UNION



PART NUMBERS ARE
MANUFACTURE PART NUMBERS

PLEASE TELL YOUR CUSTOMER
SERVICE REPRESENTATIVE
MANUFACTURE AND PART #

PART #	TUBE O.D.	APPROX. WT. LBS.	LIST PRICE
20017C	1/8"	0.01	---
20018C	5/32"	0.01	---
20001C	3/16"	0.01	---
20019C	1/4"	0.01	---
20015C	5/16"	0.01	---
20020C	3/8"	0.02	---
20021C	1/2"	0.03	---
20016C	1/4" x 5/32"	0.01	---
20515C	5/16" x 1/4"	0.01	---
20022C	3/8" x 1/4"	0.01	---
20516C	3/8" x 5/16"	0.02	---
20024C	1/2" x 3/8"	0.03	---

PQ62P

UNION TEE



PART #	TUBE O.D.	APPROX. WT. LBS.	LIST PRICE
20025C	1/8"	0.01	---
20026C	5/32"	0.01	---
20027C	3/16"	0.02	---
20028C	1/4"	0.02	---
20031C	5/16"	0.02	---
20029C	3/8"	0.02	---
20030C	1/2"	0.08	---

PQ64P

90° UNION ELBOW



PART #	TUBE O.D.	APPROX. WT. LBS.	LIST PRICE
20150C	1/8"	0.01	---
20151C	5/32"	0.01	---
20149C	3/16"	0.01	---
20152C	1/4"	0.02	---
20155C	5/16"	0.02	---
20153C	3/8"	0.02	---
20154C	1/2"	0.02	---

PQ65P

UNION "Y" CONNECTOR



PART #	TUBE O.D.	APPROX. WT. LBS.	LIST PRICE
20551C	5/32"	0.01	---
20553C	1/4"	0.02	---
20182C	5/16"	0.02	---
20555C	3/8"	0.02	---
20185C	1/2"	0.07	---

PQ89P

FEMALE CONNECTOR

• Brass



PART #	TUBE O.D. X FEMALE NPT	APPROX. WT. LBS.	LIST PRICE
20034C	1/4" x 1/8"	0.02	---
20035C	1/4" x 1/4"	0.04	---
20036C	3/8" x 1/4"	0.04	---
20037C	3/8" x 3/8"	0.06	---



COMPOSITE PUSH IN

MALE CONNECTOR

- Nickel Plated



N/P push-in fittings

PART #	TUBE O.D. X MALE NPT	APPROX. WT. LBS.	LIST PRICE
20050C	5/32" x 1/8"	0.02	---
20053C	1/4" x 10-32"	0.02	---
20054C	1/4" x 1/8"	0.02	---
20055C	1/4" x 1/4"	0.02	---
20056C	1/4" x 3/8"	0.04	---
20530C	5/16" x 1/8"	0.05	---
20531C	5/16" x 1/4"	0.05	---
20057C	3/8" x 1/8"	0.05	---
20058C	3/8" x 1/4"	0.06	---
20059C	3/8" x 3/8"	0.06	---
20062C	3/8" x 1/2"	0.08	---
20060C	1/2" x 1/4"	0.06	---
20061C	1/2" x 3/8"	0.08	---
20063C	1/2" x 1/2"	0.10	---

PQ68P

SWIVEL MALE ELBOW

- Swivels for installation only.
- Not a live swivel



* Global Thread

PART #	TUBE O.D. X MALE NPT	APPROX. WT. LBS.	LIST PRICE
20079C	1/8" x 1/8"	0.01	---
20535C*	1/8" x 1/4"	0.01	---
20517C*	3/16" x 1/4"	0.01	---
20080C*	5/32" x 1/8"	0.01	---
20077C*	5/32" x 1/4"	0.01	---
20049C*	5/32" x 10/32"	0.01	---
20078C	1/4" x 10-32	0.01	---
20081C	1/4" x 1/8"	0.02	---
20082C	1/4" x 1/4"	0.04	---
20086C	1/4" x 3/8"	0.06	---
20518C*	1/4" x 1/2"	0.07	---
20537C	5/16" x 1/8"	0.04	---
20538C	5/16" x 1/4"	0.04	---
20539C*	5/16" x 3/8"	0.06	---
20087C	3/8" x 1/8"	0.04	---
20083C	3/8" x 1/4"	0.08	---
20084C	3/8" x 3/8"	0.10	---
20088C	3/8" x 1/2"	0.12	---
20184C	1/2" x 1/4"	0.14	---
20085C	1/2" x 3/8"	0.16	---
20092C*	1/2" x 1/2"	0.18	---

PQ69PS

FEMALE SWIVEL ELBOWS



PART #	TUBE O.D. X FEMALE NPT	APPROX. WT. LBS.	LIST PRICE
20090C	1/4 X 1/4	0.06	---
20091C	3/8 X 1/4	0.10	---



WARNING: This product can expose you to chemicals, including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov

COMPOSITE PUSH IN AIR
FITTINGS

PART NUMBERS ARE
MANUFACTURE PART NUMBERS

PLEASE TELL YOUR CUSTOMER
SERVICE REPRESENTATIVE
MANUFACTURE AND PART #

COMPOSITE PUSH IN

45° SWIVELS



PART #	TUBE O.D. X MALE NPT	APPROX. WT. LBS.	LIST PRICE
20139C	1/4 X 1/8	0.04	---
20140C	1/4 X 1/4	0.05	---

SWIVEL MALE RUN TEE

- Swivels for installation only.
- Not a live swivel



* Global Thread

PART #	TUBE O.D. X MALE NPT	APPROX. WT. LBS.	LIST PRICE
20160C*	1/8" x 1/8"	0.03	---
20162C	1/4" x 1/8"	0.04	---
20163C	1/4" x 1/4"	0.04	---
20099C	3/8" x 1/8"	0.06	---
20100C	3/8" x 1/4"	0.08	---
20166C	1/2 x 3/8	0.14	---
20167C	1/2 x 1/2	0.16	---

PQ71PS

SWIVEL MALE BRANCH TEE

- Swivels for installation only.
- Not a live swivel



* Global Thread

PART #	TUBE O.D. X MALE NPT	APPROX. WT. LBS.	LIST PRICE
20103C*	1/8" x 1/8"	0.02	---
20519C*	1/8" x 1/4"	0.03	---
20109C*	5/32" x 1/8"	0.02	---
20135C*	5/32" x 1/4"	0.03	---
20104C*	5/32" x 10/32"	0.03	---
20105C	1/4" x 1/8"	0.04	---
20106C	1/4" x 1/4"	0.06	---
20121C	1/4" x 3/8"	0.08	---
20136C*	5/16" x 1/8"	0.04	---
20137C*	5/16" x 1/4"	0.05	---
20832C*	5/16" x 3/8"	0.06	---
20107C	3/8" x 1/4"	0.10	---
20108C	3/8" x 3/8"	0.12	---
20158C*	3/8 X 1/2	0.14	---
20138C*	1/2 X 1/4	0.14	---
20110C	1/2 X 3/8	0.16	---
20111C	1/2 X 1/2	0.21	---

PQ72PS

PART NUMBERS ARE
MANUFACTURE PART NUMBERS

PLEASE TELL YOUR CUSTOMER
SERVICE REPRESENTATIVE
MANUFACTURE AND PART #

BULKHEAD UNION



PART #	TUBE O.D.	APPROX. WT. LBS.	LIST PRICE
20127C	1/4"	0.04	---
20128C	3/8"	0.06	---
20129C	1/2"	0.10	---

PQ82P

WARNING: This product can expose you to chemicals, including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov

COMPOSITE PUSH IN

BULKHEAD FEMALES



PART #	TUBE O.D. X THREAD	APPROX. WT. LBS.	LIST PRICE
20171C	1/4 X 1/4	0.04	---

SWIVEL "Y" CONNECTOR



PART NUMBERS ARE
MANUFACTURE PART NUMBERS

PLEASE TELL YOUR CUSTOMER
SERVICE REPRESENTATIVE
MANUFACTURE AND PART #

PART #	TUBE O.D. X MALE NPT	APPROX. WT. LBS.	LIST PRICE
20187C	1/4 X 1/8	0.02	---
20557C	1/4" x 1/4"	0.02	---
20188C	3/8 X 1/4	0.04	---
20189C	3/8 X 3/8	0.04	---
20194C	1/2 X 3/8	0.06	---
20195C	1/2 X 1/2	0.09	---

• Swivels for installation only. • Not a live swivel

PQ88PS

IN-LINE NEEDLE VALVE



PART #	TUBE O.D.	APPROX. WT. LBS.	LIST PRICE
20487C	1/4"	0.04	---
20488C	5/16"	0.05	---
20489C	3/8"	0.06	---

PQ310C

RIGHT ANGLE FLOW CONTROL METER IN



- Marked w/V
- Free flow out

PART #	TUBE O.D. X MALE NPT	APPROX. WT. LBS.	LIST PRICE
20727C	1/4 X 1/8	0.04	---
20728C	1/4" x 1/4"	0.04	---
20780C	3/8 X 1/4	0.06	---
20781C	3/8 X 3/8	0.06	---
20782C	1/2 X 1/2	0.10	---

• Free flow out

JPQ

RIGHT ANGLE FLOW CONTROL METER OUT



- Marked w/C
- Free flow out

- Free flow in

PART #	TUBE O.D. X MALE NPT	APPROX. WT. LBS.	LIST PRICE
20785C	1/4 x 1/8	0.04	---
20786C	1/4 x 1/4	0.04	---
20787C	3/8 x 1/4	0.06	---
20788C	3/8 x 3/8	0.06	---
20789C	1/2 x 1/2	0.10	---

WARNING: This product can expose you to chemicals, including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov

BRASS D.O.T. PUSH IN AIR FITTINGS



D.O.T. PUSH-IN TUBE FITTINGS

BRASS D.O.T. PUSH IN AIR
FITTINGS

Meets D.O.T. FMVSS 571.106 SAE J1131 Air Brake System Requirements

Benefits for Cost Savings & Engineering Project

- Fast assembly: No tools required. Simply push tubing in. Saves up to 75% of assembly time compared to standard air compression fittings. No loose parts to handle.
- Fast disconnect: Hold the collet collar with two fingers and pull out tube. No tools required.
- Reusable: Can be connected and disconnected several times.
- Reliable sealing: Using recommended tubing, full sealing is guaranteed.
- Versatility: Buna N O'ring standard. Viton and others available per request. Secure tube retention. Pulling on tubing only serves to tighten the connection.
- Pre-Applied Teflon® based pipe sealant on all male pipe threads, saving customer additional labor.
- Full Flow Design, provides more flow area than conventional fittings with internal tube supports even in the swivels.

DOT Fittings are constructed with an all brass captive eyelet which allows for maximum flow. The brass captive eyelet with extended length is floating and has a machined top end radius for easy installation of tubing. All male threads have a pre-applied Teflon® based pipe sealant to provide for easy assembly and leak proof seal.

• Materials:

Brass
"O" Ring: Buna - Nitrile (90 Durometer)
EP (Ethylene Propylene)

• Working Pressures & Temperature Ranges

Vacuum to 150 PSI
-40°F to 200°F (-40°C to +93°C)

Dimension data can change without notice. Please check when dimensions are critical.

BRASS D.O.T. PUSH IN FITTINGS

BRASS D.O.T. PUSH IN AIR
FITTINGS


D.O.T. PUSH-IN UNION

D.O.T. PUSH-IN UNION	
	
JABO PART#	SIZE
038-12868	1/4"
038-12869	5/32"
038-12870	3/8"
038-12872	1/2"
038-12873	5/8"
038-12874	3/4"
OTHER SIZES AVAIL UPON REQUEST	

D.O.T. PUSH-IN UNION TEE

D.O.T. PUSH IN UNION TEE	
	
JABO PART#	SIZE
038-12875	1/4"
038-12876	3/8"
038-12877	1/2"
OTHER SIZES AVAIL UPON REQUEST	

PUSH IN X MIP D.O.T. ADAPTER

PUSH IN X MIP DOT	
	
JABO PART#	SIZE
038-12892	3/16X1/8"
038-12910	5/32 X 1/8"
038-12893	1/4X1/8"
038-12894	1/4 X 1/4"
038-12898	3/8 X 1/4"
038-12899	3/8 X 3/8"
038-12903	1/2 X 1/2"
038-12905	5/8 X 1/2"
038-12907	3/4"
OTHER SIZES AVAIL UPON REQUEST	

PUSH IN X DOT MIP ELBOW

PUSH IN X MIP D.O.T. ELL	
	
JABO PART#	SIZE
038-12911	3/16X1/8"
OTHER SIZES AVAIL UPON REQUEST	

PUSH-IN X MIP DOT SWIVEL

PI X MIP DOT SWIVEL	
	
JABO PART#	SIZE
038-12942	5/32 X 1/8"
038-12913	1/4 X 1/8"
038-12915	1/4 X 1/4"
038-12921	3/8 X 1/4"
038-12923	3/8 X 3/8"
038-12931	1/2 X 1/2"
038-12935	5/8 X 1/2"
038-12939	3/4"
OTHER SIZES AVAIL UPON REQUEST	

PUSH-IN X MIP SWIVEL 45 DOT
ELBOW

PI X MIP SWIVEL	
	
JABO PART#	SIZE
038-12964	1/4X1/4"
038-12970	3/8X3/8"
038-12977	1/2X1/2"
038-12980	5/8 X 1/2"
038-12982	3/4"
OTHER SIZES AVAIL UPON REQUEST	



BRASS PUSH IN




BRASS PUSH-IN FITTINGS



ENGINEERING AND DESIGN

- **QUICK CONNECT**, simply push tubing in, no tools. Saves up to 75% of assembly time of standard compression fittings.
- **QUICK DISCONNECT**, hold two fingers on insert and pull tubing out, no tools required.
- **REUSEABLE**, connect and disconnect numerous times.
- **FULL FLOW DESIGN**, provides up to 60% more flow area than conventional fittings with internal tube supports.
- **POSITIVE SEAL**, no leaks. After tubing is inserted, seal is made.
- **VERSATILE**, BunaN "O" rings standard. Other materials of "O" rings available.
- **SECURE TUBE RETENTION**, pulling on tubing only serves to tighten the connection.
- **SELF CONTAINED ASSEMBLY**, no loose parts, brass body and insert.
- **BRASS CONSTRUCTION**, elbows and tees are forged brass.

- **CHOICE** of convenient swivel or economical stationary elbows and tees.
- **STRAIGHT CONNECTORS** have interior hex for Allen key tightening where space is limited...no need to use a wrench.
- **PRE-APPLIED TEFLON**® based pipe sealant on all male pipe threads, saving customer additional labor.
- **METRIC SIZES AVAILABLE**: Metric tube sizes from 2mm through 12mm in both standard NPT and metric pipe sizes are available on a special order basis.
- **WORKING TEMPERATURE**: -100°F to 200°F (other ranges available on request).
- **PIPE THREAD**: NPTF with Teflon® based sealant pre-applied.
- **TOLERANCE** +/- .02 on all dimensions. Dimension data can change without notice. Please call us when dimensions are critical



When tubing (1) is inserted into the fitting, it first passes through the gripping teeth (2). Just beyond the gripping teeth is the o-ring (3) which provides the leak proof seal against the OD of the tube. The gripping teeth grab the tube, which expands the insert. Pulling back on the tube only tightens the grip as the insert moves onto the camming surface (4). Pressure through the tube also serves to tighten the grip. The tube bottoms against a positive tube stop (5) in a cavity providing tube support to prevent leakage.

PART NUMBERS ARE
MANUFACTURE PART NUMBERS

PLEASE TELL YOUR CUSTOMER
SERVICE REPRESENTATIVE
MANUFACTURE AND PART #


BRASS PUSH IN AIR
FITTINGS

WARNING: This product can expose you to chemicals, including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov

BRASS PUSH IN FITTINGS


BRASS PUSH IN AIR
FITTINGS

Union Connector

AQ62P
MQ62PART NUMBERS ARE
MANUFACTURE PART NUMBERSPLEASE TELL YOUR CUSTOMER
SERVICE REPRESENTATIVE
MANUFACTURE AND PART #


PART #	TUBE O.D.	A	B
20017	1/8"	1.07	0.38
20018	5/32"	1.07	0.38
20019	1/4"	1.50	0.44
20001	3/16"		
20022	3/8" x 1/4"	1.46	0.56
20015	5/16"		
20020	3/8"	1.44	0.56
20021	1/2"	1.63	0.81

UNION TEE

AQ64P
MQ64


PART #	TUBE O.D.	A	BODY SIZE
20025	1/8"	0.65	0.31
20026	5/32"	0.67	0.31
20027	3/16"	0.75	0.37
20028	1/4"	0.92	0.37
20031*	5/16"	0.89	0.49
20029	3/8"	0.98	0.50
20030	1/2"	1.16	0.62
20029R64	3/8" x 1/4"		

UNION ELBOW

AQ65P
MQ65

PART #	TUBE O.D.	A	BODY SIZE
20150	1/8"	0.65	0.31
20151	5/32"	0.67	0.31
20152	1/4"	0.87	0.37
20155	5/16"	0.91	0.47
20153	3/8"	0.97	0.50
20154	1/2"	1.15	0.62

FEMALE CONNECTOR



AQ66P

PART #	TUBE O.D. X FEMALE NPTF	A	HEX
20032	1/8" x 1/8"	0.96	0.56
20038	1/8" x 1/4"	1.04	0.67
20012	5/32" x 1/8"	1.09	0.56
20034	1/4" x 1/8"	1.23	0.56
20035	1/4" x 1/4"	1.42	0.75
20036	3/8" x 1/4"	1.32	0.75
20037	3/8" x 3/8"	1.31	0.87

MIDLAND
INDUSTRIES

BRASS PUSH IN FITTINGS

MALE CONNECTOR



PUSH-IN X MIP ADAPTER

ADAPTER




JABO PART#	SIZE
038-12294	5/16X1/4

PART #	TUBE O.D. X MALE NPTF	A	HEX
20045	1/8" x 1/16"	0.68	0.37
20047*	1/8" x 10-32"	0.69	0.37
20048	1/8" x 1/8"	0.61	0.43
20023	1/8" x 1/4"	0.98	0.56
20049*	5/32" x 10-32"*	0.67	0.37
20050	5/32" x 1/8"	0.67	0.43
20046	5/32" x 1/4"	0.85	0.56
20051*	3/16" x 10-32"*	0.80	0.37
20052	3/16" x 1/8"	0.93	0.43
20053*	1/4" x 10-32"*	0.70	0.43
20039	1/4" x 1/16"	0.92	0.43
20054	1/4" x 1/8"	0.93	0.43
20055	1/4" x 1/4"	0.93	0.56
20056	1/4" x 3/8"	0.94	0.68
20530	5/16" x 1/8"	1.07	0.56
20531	5/16" x 1/4"	0.98	0.56
20532	5/16" x 3/8"	1.06	0.75
20057	3/8" x 1/8"	1.10	0.56
20058	3/8" x 1/4"	1.11	0.56
20059	3/8" x 3/8"	1.02	0.68
20062	3/8" x 1/2"	1.02	0.87
20060	1/2" x 1/4"	1.36	0.81
20061	1/2" x 3/8"	1.30	0.81
20063	1/2" x 1/2"	1.23	0.87

BRASS PUSH IN AIR
FITTINGS

SWIVEL MALE ELBOW

AQ69PS
MQ69S

* Nickel Plated

** Furnished with gaskets


PART NUMBERS ARE
MANUFACTURE PART NUMBERSPLEASE TELL YOUR CUSTOMER
SERVICE REPRESENTATIVE
MANUFACTURE AND PART #

PART #	TUBE O.D. X MALE NPTF	A	B	HEX
20079C210	1/8" x 10-32"			
20079	1/8" x 1/8"	0.69	0.98	0.43
20535*	1/8" x 1/4"	0.76	0.87	0.56
20076**	5/32" x 10-32"	0.67	0.71	0.37
20080	5/32" x 1/8"	0.68	0.89	0.43
20077	5/32" x 1/4"	0.68	1.08	0.56
20078**	1/4" x 10-32"	0.86	0.79	0.31
20081	1/4" x 1/8"	0.90	0.93	0.37
20082	1/4" x 1/4"	0.90	0.99	0.56
20086	1/4" x 3/8"	0.98	1.14	0.68
20538*	5/16" x 1/4"	0.91	0.85	0.56
20539*	5/16" x 3/8"	0.91	0.87	0.75
20087	3/8" x 1/8"	1.00	1.06	0.43
20083	3/8" x 1/4"	0.99	1.15	0.56
20084	3/8" x 3/8"	1.00	1.24	0.68
20088	3/8" x 1/2"	1.00	1.54	0.87
20085	1/2" x 3/8"	1.16	1.34	0.68
20092	1/2" x 1/2"	1.16	1.51	0.87

BRASS PUSH IN FITTINGS

BRASS PUSH IN AIR
FITTINGS

FIXED MALE ELBOW



Dimension data can
change without notice.
Please check when di-
mensions are critical.

PART #	TUBE O.D. X MALE NPTF	A	B	BODY SIZE
20065	1/8" x 1/8"	0.69	0.69	0.31
20066	5/32" x 1/8"	0.68	0.68	0.31
20067	3/16" x 1/8"	0.75	0.71	0.37
20068	1/4" x 1/8"	0.89	0.75	0.37
20069	1/4" x 1/4"	0.95	0.96	0.37
20070	1/4" x 3/8"	1.00	0.98	0.50
20071	3/8" x 1/8"	0.99	0.80	0.50
20072	3/8" x 1/4"	0.98	0.98	0.50
20073	3/8" x 3/8"	0.97	0.98	0.50
20074	1/2" x 1/4"	1.15	1.05	0.62
20075	1/2" x 3/8"	1.18	1.05	0.62
20064	1/2" x 1/2"	1.16	1.66	0.62

PART NUMBERS ARE
MANUFACTURE PART NUMBERS


PLEASE TELL YOUR CUSTOMER
SERVICE REPRESENTATIVE
MANUFACTURE AND PART #

FEMALE SWIVEL ELBOW



PART #	TUBE O.D. X FEMALE NPTF	A	B	HEX
20094S	5/32" x 1/8"	0.76	1.06	0.56
20089S	1/4" x 1/8"	0.98	1.08	0.56
20090S	1/4" x 1/4"	0.98	1.26	0.75

FIXED FEMALE ELBOW




PART #	TUBE O.D. X FEMALE NPTF	A	B	BODY SIZE
20192	1/8" x 1/8"	0.78	0.82	0.31
20089	1/4" x 1/8"	0.91	0.75	0.37
20090	1/4" x 1/4"	1.03	1.03	0.50
20091	3/8" x 1/4"	0.98	0.95	0.50

MIDLAND
INDUSTRIES

BRASS PUSH IN FITTINGS


BRASS PUSH IN AIR
FITTINGS

SWIVEL MALE RUN TEE

AQ71PS
MQ71S


PART #	TUBE O.D. X MALE NPTF	A	B	HEX
20160	1/8" x 1/8"	0.65	0.86	0.43
20161	5/32" x 1/8"	0.67	1.04	0.43
20162	1/4" x 1/8"	0.92	1.04	0.44
20163	1/4" x 1/4"	0.92	1.13	0.56
20168	1/4" x 3/8"			
20164	3/8" x 1/4"	0.94	1.19	0.56
20165	3/8" x 3/8"	0.96	1.24	0.50
20166	1/2" x 3/8"	1.14	1.31	0.68
20167	1/2" x 1/2"	1.14	1.61	0.87

FIXED MALE RUN TEE

AQ71P
MQ71


PART #	TUBE O.D. X MALE NPTF	A	B	BODY SIZE
20095	1/8" x 1/8"	0.65	0.72	0.31
20098	1/4" x 1/8"	0.92	0.74	0.37
20093	1/4" x 1/4"	0.92	0.92	0.43
20099	3/8" x 1/8"	0.94	0.82	0.50
20100	3/8" x 1/4"	0.98	0.98	0.50
20101	3/8" x 3/8"	1.05	1.05	0.62
20102	1/2" x 3/8"	1.14	1.05	0.62

SWIVEL MALE BRANCH TEE

AQ72PS
MQ72S

PART #	TUBE O.D. X MALE NPTF	A	B	HEX
20103	1/8" x 1/8"	0.65	0.81	0.31
20104*	5/32" x 10-32"	0.65	0.71	0.31
20109	5/32" x 1/8"	0.67	0.94	0.37
20105	1/4" x 1/8"	0.92	0.97	0.43
20106	1/4" x 1/4"	0.92	1.09	0.55
20107	3/8" x 1/4"	0.96	1.14	0.56
20108	3/8" x 3/8"	0.96	1.23	0.69
20110	1/2" x 3/8"	1.16	1.34	0.69
20111	1/2" x 1/2"	1.16	1.64	0.87

FIXED MALE BRANCH TEE

AQ72P
MQ72

PART #	TUBE O.D. X MALE NPTF	A	B	BODY SIZE
20112	1/8" x 1/8"	0.69	0.72	0.31
20113	5/32" x 1/8"	0.69	0.65	0.31
20115	1/4" x 1/8"	0.92	0.74	0.37
20116	1/4" x 1/4"	0.91	0.91	0.43
20117	3/8" x 1/8"	0.98	0.80	0.50
20118	3/8" x 1/4"	0.98	0.97	0.50
20119	3/8" x 3/8"	0.98	0.97	0.50
20607	1/2" x 1/4"			
20120	1/2" x 3/8"	1.16	1.05	0.62

MIDLAND
INDUSTRIESPART NUMBERS ARE
MANUFACTURE PART NUMBERSPLEASE TELL YOUR CUSTOMER
SERVICE REPRESENTATIVE
MANUFACTURE AND PART #

BRASS PUSH IN FITTINGS

SWIVEL 45° ELBOW

PART NUMBERS ARE
MANUFACTURE PART NUMBERS


PLEASE TELL YOUR CUSTOMER
SERVICE REPRESENTATIVE
MANUFACTURE AND PART #



PART #	TUBE O.D. X MALE NPTF	A	B	BODY SIZE
20139	1/4" x 1/8"			
20140	1/4" x 1/4"			
20141	3/8" x 1/4"			

BRASS PUSH IN AIR
FITTINGS

UNION "Y"



PART #	TUBE O.D. 1 X 2	A	B
20551	5/32" x 5/32"	1.36	0.81
20552	1/4" x 1/8"	1.61	1.06
20553	1/4" x 1/4"	1.81	1.16

BULKHEAD UNION



PART #	TUBE O.D. A	B	C	HEX
20124	1/8"	1.12	7/16-20	0.62
20125	5/32"	1.12	7/16-20	0.62
20126	3/16"	1.27	1/2-20	0.68
20127	1/4"	1.69	1/2-20	0.68
20128	3/8"	1.69	3/4-16	0.81
20129	1/2"	1.85	15/16-20	1.12


FEMALE BULKHEAD UNION



PART #	TUBE O.D. X FEMALE NPTF	A	HEX
20170	1/4" x 1/8"	1.19	0.68
20171	1/4" x 1/4"	1.36	0.75
20172	3/8" x 1/4"	1.71	0.75

BRASS PUSH IN FITTINGS

CROSS



SIZE	SIZE	A	B	BODY SIZE
20142	1/4"	1.03	2.06	0.37
20143	3/8"	1.06	2.12	0.50

BRASS PUSH IN AIR
FITTINGS

REDUCER - NICKEL PLATED - TUBE OD X STUD



PART #	TUBE O.D. 1 X 2	A	B
20510	1/8" x 1/4"	1.38	0.39
20511	5/32" x 1/4"	1.33	0.35
20512	1/4" x 3/8"	1.50	0.51



NICKEL PLATED PUSH IN FITTINGS



NICKEL PLATED PUSH-IN FITTINGS WITH GLOBAL THREAD

• NPTF • BSPP • BSPT • ISO 7 • ISO 228 • G THREAD • J THREAD



- Saves time and money
- No stripped threads
- No stripped parts
- Reduce inventory

- Completely reusable
- Quick installation
- No pitch identification

Component Parts and Materials	
Body	Brass - Nickel Plated
Thrust Ring	Acetalic Resin/ Glass filled Nylon
Sleeve	Brass - Nickel Plated
Gripper Collet	Stainless Steel
Safety Ring	PA66
Lip Seal (1/8 O-Ring Seal)	NBR 70
Thread Seal	NBR 70

Max Operating Pressure: Vacuum to 290PSI.
 Min Temperature: -4°F
 Max Temperature: 176°F
 Tubing: Nylon, Polyethylene, Polyurethane.
 - For best results use 95 Durometer
 Media: Compressed air, water, vacuum

- Tolerance
 +/- .02 on all dimensions. Dimension data
 can change without notice. Please call us when
 dimensions are critical.

GLOBAL THREAD Works With Inch or Metric Threads



"Global Thread" fittings can be assembled with female threads produced to the following standards:

Tapered NPTF
 Parallel (BSPP, BSP, ISO 7)
 Tapered (BSPT, PT, ISO 7, ISO 228)

WARNING: This product can expose you to chemicals, including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, visit www.P65Warnings.ca.gov



NICKEL PLATED PUSH IN
AIR FITTINGS

NICKEL PLATED PUSH IN FITTINGS

NICKEL PLATED PUSH IN
AIR FITTINGS

PUSH-IN UNION NICKLE PLTD

NICKEL PUSH IN UNION



JABO PART#	SIZE
038-12375	5/16
OTHER SIZES AVAIL UPON REQUEST	



FOR ALL OTHER NICKEL PLATED PUSH IN FITTINGS GO

:

midlandindustries.com



JABO SUPPLY CORPORATION

WELDING HOSE



WELDING HOSE

JABO SUPPLY



5 LOCATIONS

PARKERSBURG, WV

10085 Emerson Avenue 26102
(304) 464-4400

MORGANFIELD, KY

118 Jim Veatch Road, 42437
(270) 389-3430

HUNTINGTON, WV

209 Braley Street, 25705
(304) 736-8333

NORTON, VA

205 Hawthorne Drive, 24273
(276) 679-1224

BEAVER, WV (BECKLEY)

227 C&O Shop Road 25813
(304-252-0000

SINCE 1964 SERVICE IS MORE THAN A PROMISE

WELDING HOSE

WELDING HOSE

200 PSI GRADE R		
JABO PART#	SIZE	WORKING PSI
*	3/16"X25'	200
*	3/16"X50'	200
034-15160	1/4"X25'	200
034-15180	1/4"X50'	200
*	5/16"X25'	200
*	5/16"X50'	200
*Non Stock - Call Jabo Supply		

General Applications:

- General welding service
- Meets RMA IP-7-2011

Construction:

- **Tube** – EPDM.
- **Reinforcement** – Spiral polyester yarns.
- **Cover** – Red and green EPDM (ACETYLENE USE ONLY).

Service Temperature Range:

-40°F (-40°C) to +180°F (+82°C)

200 PSI Grade R Twin Line Welding Hose - Coupled Assemblies



Redi-Weld™ Coupled Assemblies

Nominal Specifications

Part Number	Color	ID (in)	OD (in)	Working Pressure (psi)	Coil Length (ft)	Weight (lbs/pc)
REDI-WELD-03X25	Red / Grn	3/16	0.44	200	25	5.0
REDI-WELD-03X50	Red / Grn	3/16	0.44	200	50	8.8
REDI-WELD-04X25	Red / Grn	1/4	0.53	200	25	6.4
REDI-WELD-04X50	Red / Grn	1/4	0.53	200	50	12.1
REDI-WELD-05X25	Red / Grn	5/16	0.59	200	25	7.6
REDI-WELD-05X50	Red / Grn	5/16	0.59	200	50	14.0

Redi-Weld™ Bulk Hose on Reels

NEW

Nominal Specifications


Part Number	Color	ID (in)	OD (in)	Working Pressure (psi)	Reel Length (ft)	Weight (lbs/pc)
REDI-WELD-03X700	Red / Grn	3/16	0.44	200	700	105
REDI-WELD-04X700	Red / Grn	1/4	0.53	200	700	147



JABO

SUPPLY CORPORATION

PVC-THERMOPLASTIC

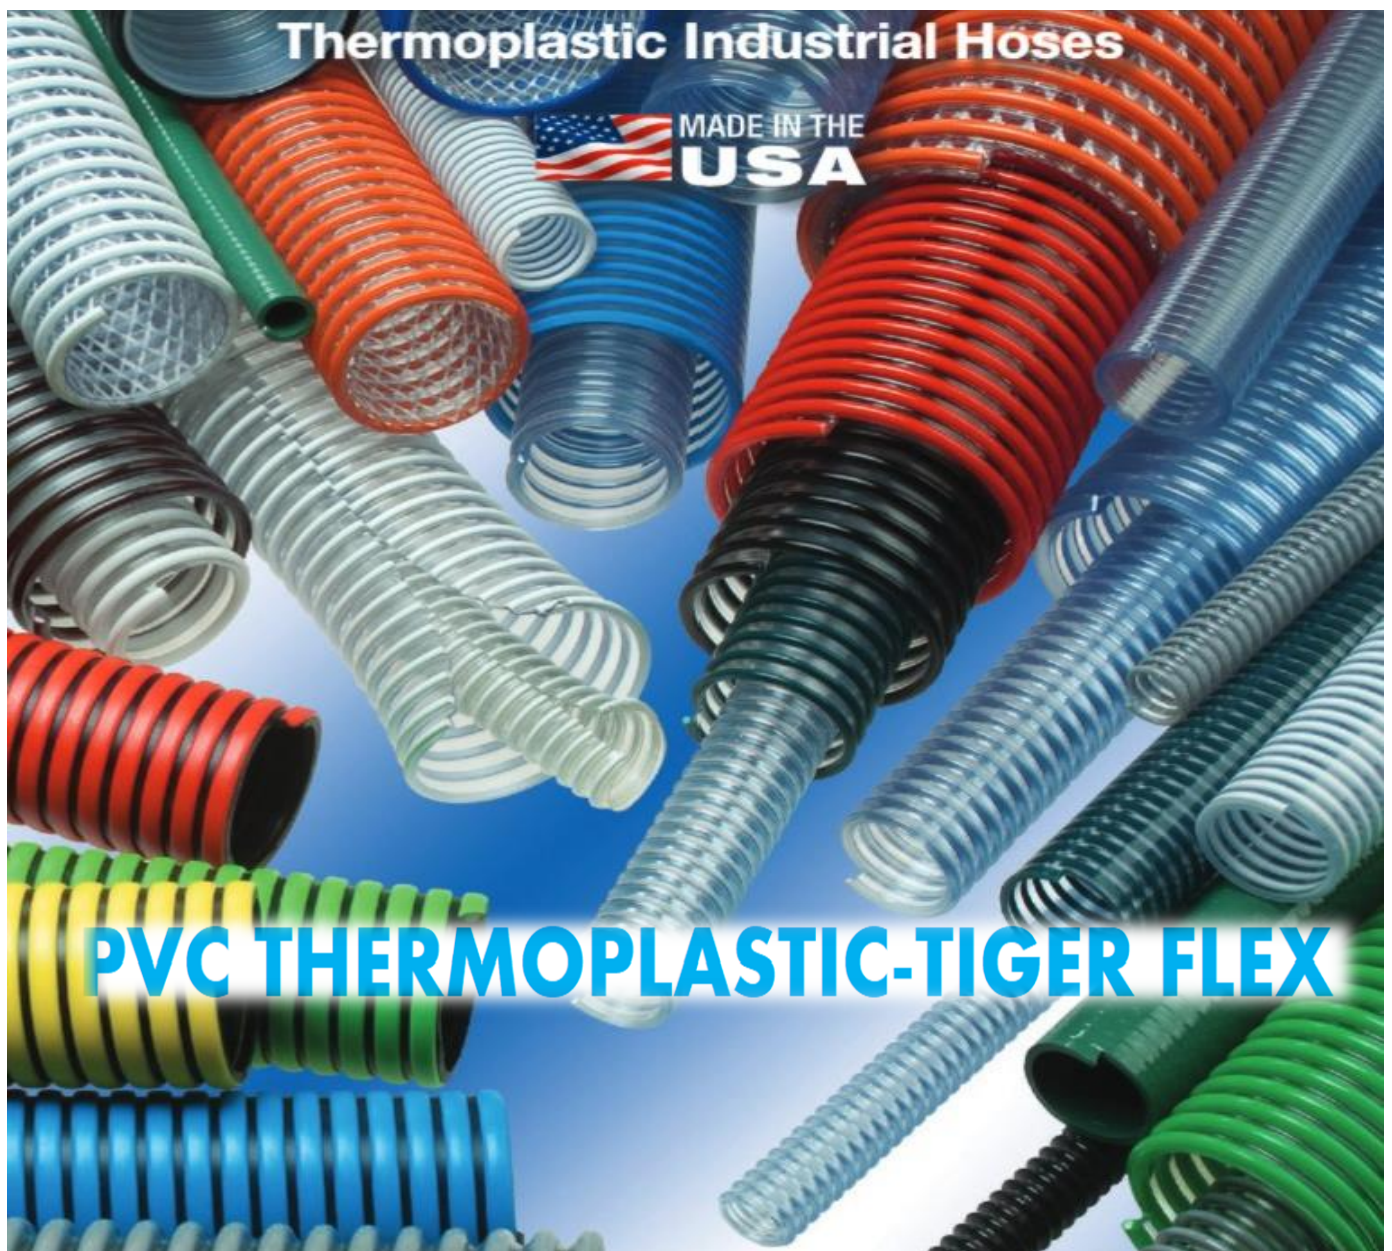

JABO SUPPLY



5 LOCATIONS

PARKERSBURG, WV

10085 Emerson Avenue 26102
(304) 464-4400

MORGANFIELD, KY

118 Jim Veatch Road, 42437
(270) 389-3430

HUNTINGTON, WV

209 Braley Street, 25705
(304) 736-8333

NORTON, VA

205 Hawthorne Drive, 24273
(276) 679-1224

BEAVER, WV (BECKLEY)

227 C&O Shop Road 25813
(304-252-0000

SINCE 1964 SERVICE IS MORE THAN A PROMISE

LIQUID SUCTION

TIGERFLEX EPDM SUCTION HOSE

TG GREEN		
		
JABO PART#	SIZE	WORKING PSI 68F/104F
034-10211	1"	65/45
034-10214	1-1/4"	60/40
034-10215	1-1/2"	50/35
034-10220	2"	50/35
034-10225	2-1/2"	45/30
034-10230	3"	45/30
034-10240	4"	40/25
034-10242	6"	30/20
*Non Stock - Call Jabo Supply		

Tiger™ Green TG™ Series EPDM Suction Hose

General Applications:

- Agriculture liquid fertilizers
- Irrigation lines
- Liquid manure handling
- Marine bilge discharge
- Pumps, rental and construction dewatering
- Pumps, trash
- Septic and wastewater handling
- Used frack solution removal
- Water suction – standard duty

Construction: EPDM tube with polyethylene helix.

Service Temperature Range:

-40°F (-40°C) to +160°F (+71°C)*


**Nominal Specifications**

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
TG100	1	25.4	1.40	35.5	65	45	FULL	28	2	100	0.28
TG125	1-1/4	31.8	1.63	41.4	60	40	FULL	28	3	100	0.33
TG150	1-1/2	38.1	1.93	49.0	50	35	FULL	28	3	100	0.44
TG200	2	50.8	2.51	63.8	50	35	FULL	28	5	100	0.67
TG250	2-1/2	63.5	3.07	78.0	45	30	FULL	28	5.5	100	0.95
TG300	3	76.2	3.60	91.5	45	30	FULL	26	7	100	1.14
TG400	4	101.6	4.70	119.5	40	25	FULL	26	11.5	100	1.84
TG600	6	152.4	6.85	174.0	30	20	28	24	20	100/20	3.07

LIQUID SUCTION

CONTRACTOR GRADE PVC SUCTION HOSE

CLEAR WITH GREEN HELIX



EHCG

JABO PART#	SIZE	WORKING PSI 68F/104F
*	3/4"	100/60
*	1"	75/55
034-10529	1-1/4"	75/55
034-10530	1-1/2"	65/45
034-10531	2"	60/40
*	2-1/2"	60/40
034-10533	3"	60/35
034-10534	4"	50/30
*	5"	40/25
*	6"	35/20
*	8"	30/20
*Non Stock - Call Jabo Supply		

EHGR / EHCW / EHCG Series

Contractor Grade PVC Suction Hose

General Applications:

- Agricultural liquid fertilizer
- Air seeder lines
- Drain lines
- Irrigation lines
- Pumps, rental and construction dewatering
- Pumps, trash
- Rock dusting
- Water suction – standard duty

Construction:

PVC tube with rigid PVC helix.

Service Temperature:

-4°F (-20°C) to 150°F (+65°C)*


Nominal Specifications

Part Numbers			ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius (in)	Std. Length (ft)	Weight (lbs/ft)
Solid Green	Clear w/ White Helix	Clear w/ Green Helix	(in)	(mm)	(in)	(mm)	at 68°F	at 104°F	at 68°F	at 104°F			
EHGR075	EHCW075	EHCG075	3/4	19.1	1.00	25.5	100	60	28	26	3	100	0.18
EHGR100	EHCW100	EHCG100	1	25.4	1.22	31.0	75	55	28	26	3	100	0.24
EHGR125	EHCW125	EHCG125	1 1/4	31.7	1.50	38.0	75	55	28	24	4	100	0.31
EHGR150	EHCW150	EHCG150	1 1/2	38.1	1.76	44.6	65	45	28	24	5	100	0.38
EHGR200	EHCW200	EHCG200	2	50.8	2.32	59.0	60	40	28	24	6	100	0.56
EHGR250	EHCW250	EHCG250	2 1/2	63.5	2.81	71.5	60	40	26	22	7	100	0.67
EHGR300	EHCW300	EHCG300	3	76.2	3.37	85.5	60	35	26	20	9	100	0.99
EHGR400	EHCW400	EHCG400	4	101.6	4.39	111.5	50	30	20	16	14	100	1.46
—	EHCW500	EHCG500	5	127.8	5.69	144.6	40	25	26	20	9	100	2.28
EHGR600	EHCW600	EHCG600	6	152.4	6.63	168.5	35	20	24	16	30	100/20	2.84
EHGR800	EHCW800	EHCG800	8	203.2	8.86	225.0	30	20	22	14	35	20	5.63

LIQUID SUCTION

CONTRACTOR GRADE PVC
SUCTION HOSE

EHGR SERIES MSHA APPROVED



EHGR

JABO PART#	SIZE	PSI RATING 68F/104F
*	3/4"	100/60
*	1"	75/55
034-10479	1-1/4"	75/55
034-10480	1-1/2"	65/45
034-10500	2"	60/40
*	2-1/2"	60/40
034-10502	3"	60/35
034-10503	4"	50/30
*	5"	40/25
*	6"	35/20
*	8"	30/20
<i>*Non Stock - Call Jabo Supply</i>		

EHGR / EHCW / EHCW
SeriesContractor Grade
PVC Suction Hose**General Applications:**

- Agricultural liquid fertilizer
- Air seeder lines
- Drain lines
- Irrigation lines
- Pumps, rental and construction dewatering
- Pumps, trash
- Rock dusting
- Water suction – standard duty

Construction:

PVC tube with rigid PVC helix.

Service Temperature:

-4°F (-20°C) to 150°F (+65°C)*

MSHA APPROVED**MADE IN THE
USA****Nominal Specifications**

Part Numbers			ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius (in)	Std. Length (ft)	Weight (lbs/ft)
Solid Green	Clear w/ White Helix	Clear w/ Green Helix	(in)	(mm)	(in)	(mm)	at 68°F	at 104°F	at 68°F	at 104°F			
EHGR075	EHCW075	EHCW075	3/4	19.1	1.00	25.5	100	60	28	26	3	100	0.18
EHGR100	EHCW100	EHCW100	1	25.4	1.22	31.0	75	55	28	26	3	100	0.24
EHGR125	EHCW125	EHCW125	1 1/4	31.7	1.50	38.0	75	55	28	24	4	100	0.31
EHGR150	EHCW150	EHCW150	1 1/2	38.1	1.76	44.6	65	45	28	24	5	100	0.38
EHGR200	EHCW200	EHCW200	2	50.8	2.32	59.0	60	40	28	24	6	100	0.56
EHGR250	EHCW250	EHCW250	2 1/2	63.5	2.81	71.5	60	40	26	22	7	100	0.67
EHGR300	EHCW300	EHCW300	3	76.2	3.37	85.5	60	35	26	20	9	100	0.99
EHGR400	EHCW400	EHCW400	4	101.6	4.39	111.5	50	30	20	16	14	100	1.46
—	EHCW500	EHCW500	5	127.8	5.69	144.6	40	25	26	20	9	100	2.28
EHGR600	EHCW600	EHCW600	6	152.4	6.63	168.5	35	20	24	16	30	100/20	2.84
EHGR800	EHCW800	EHCW800	8	203.2	8.86	225.0	30	20	22	14	35	20	5.63

LIQUID SUCTION

CONTRACTOR GRADE PVC
SUCTION HOSE

EHCW CLEAR WHITE HELIX



EHCW

EHGR / EHCW / EHCW Series

Contractor Grade PVC Suction Hose

General Applications:

- Agricultural liquid fertilizer
- Air seeder lines
- Drain lines
- Irrigation lines
- Pumps, rental and construction dewatering
- Pumps, trash
- Rock dusting
- Water suction – standard duty

Construction:

PVC tube with rigid PVC helix.

Service Temperature:

-4°F (-20°C) to 150°F (+65°C)*

JABO PART#	SIZE	PSI RATING 68F/104F
034-10400	3/4"	100/60
034-10410	1"	75/55
034-10411	1-1/4"	75/55
034-10413	1-1/2"	65/45
034-10414	2"	60/40
034-10415	2-1/2"	60/40
034-10416	3"	60/35
034-10417	4"	50/30
*	5"	40/25
*	6"	35/20
*	8"	30/20
*Non Stock - Call Jabo Supply		

Nominal Specifications

Part Numbers			ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius (in)	Std. Length (ft)	Weight (lbs/ft)
Solid Green	Clear w/ White Helix	Clear w/ Green Helix	(in)	(mm)	(in)	(mm)	at 68°F	at 104°F	at 68°F	at 104°F			
EHGR075	EHCW075	EHCW075	3/4	19.1	1.00	25.5	100	60	28	26	3	100	0.18
EHGR100	EHCW100	EHCW100	1	25.4	1.22	31.0	75	55	28	26	3	100	0.24
EHGR125	EHCW125	EHCW125	1 1/4	31.7	1.50	38.0	75	55	28	24	4	100	0.31
EHGR150	EHCW150	EHCW150	1 1/2	38.1	1.76	44.6	65	45	28	24	5	100	0.38
EHGR200	EHCW200	EHCW200	2	50.8	2.32	59.0	60	40	28	24	6	100	0.56
EHGR250	EHCW250	EHCW250	2 1/2	63.5	2.81	71.5	60	40	26	22	7	100	0.67
EHGR300	EHCW300	EHCW300	3	76.2	3.37	85.5	60	35	26	20	9	100	0.99
EHGR400	EHCW400	EHCW400	4	101.6	4.39	111.5	50	30	20	16	14	100	1.46
—	EHCW500	EHCW500	5	127.8	5.69	144.6	40	25	26	20	9	100	2.28
EHGR600	EHCW600	EHCW600	6	152.4	6.63	168.5	35	20	24	16	30	100/20	2.84
EHGR800	EHCW800	EHCW800	8	203.2	8.86	225.0	30	20	22	14	35	20	5.63

LIQUID SUCTION

TIGERFLEX EPDM SUCTION HOSE

TIGER TSD SERIES



JABO PART#	SIZE	PSI RATING 68F/104F
034-10250	1-1/4"	100/75
034-10251	1-1/2"	100/75
034-10252	2"	100/75
034-10254	3"	90/65
*	4"	75/50
*Non Stock - Call Jabo Supply		

NEW
SIZE

Tiger™

TSD™ Series

EPDM Fabric Reinforced Suction & Discharge Hose

General Applications:

- Agriculture liquid fertilizers
- Agri-foam systems
- Liquid manure handling
- Pumps, rental and construction dewatering
- Pumps, trash
- Septic and wastewater handling
- Suction and discharge
- Water suction – heavy duty

Construction: Double-ply EPDM, polyester fabric reinforcement and polyethylene helix.

Service Temperature Range:

-40°F (-40°C) to +160°F (+71°C)*


PVC-THERMOPLASTIC

Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
TSD125	1-1/4	31.8	1.70	43.2	100	75	FULL	28	3	100	0.41
TSD150	1-1/2	38.1	2.00	50.7	100	75	FULL	28	3	100	0.51
TSD200	2	50.8	2.54	64.5	100	75	FULL	28	5	100	0.73
TSD300	3	76.2	3.62	92.0	90	65	FULL	26	8	100	1.18
TSD400	4	101.6	4.53	121.0	75	50	28	26	9.5	100	1.40

LIQUID SUCTION

EDPM SUCTION HOSE

TBLU SERIES		
		
JABO PART#	SIZE	PSI RATING 68F/104F
034-10205	2"	50/35
*	3"	45/30
*	4"	40/25
*Non Stock - Call Jabo Supply		

Tiger™ Red TRED™ Series

Tiger™ Blue TBLU™ Series EPDM Suction Hoses

General Applications:

- Agriculture liquid fertilizers
- Irrigation lines
- Liquid manure handling
- Marine bilge discharge
- Pumps, rental and construction dewatering
- Pumps, trash
- Septic and wastewater handling
- Used frack solution removal
- Water suction – standard duty




Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
TRED/TBLU200	2	50.8	2.51	63.8	50	35	FULL	28	5	100	0.67
TRED/TBLU300	3	76.2	3.60	91.5	45	30	FULL	26	7	100	1.14
TRED/TBLU400	4	101.6	4.70	119.5	40	25	FULL	26	11.5	100	1.84

LIQUID SUCTION

HEAVY DUTY PVC SUCTION HOSE

G SERIES		
		
JABO PART#	SIZE	PSI RATING 68F/104F
*	1-1/2"	100/65
034-10205	2"	100/65
*	2-1/2"	70/48
*	3"	70/45
*	4"	60/40
*	6"	40/25
*	8"	30/20
<i>*Non Stock - Call Jabo Supply</i>		

Tiger™ Suction

F™/G™/S™ Series

Heavy Duty PVC Suction Hose


General Applications:

- Irrigation lines
- Pumps, rental and construction dewatering
- Pumps, trash
- Water suction – heavy duty

Construction: PVC tube with rigid PVC helix.

Service Temperature Range:

-4°F (-20°C) to +150°F (+65°C)*

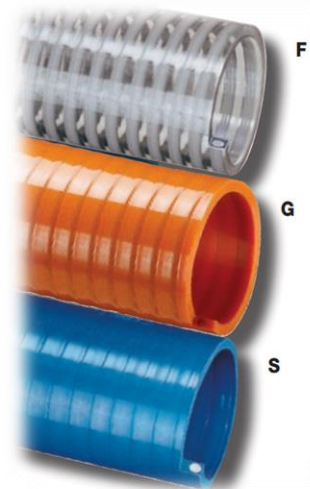


Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
F075	3/4	19.0	1.01	25.6	115	75	Full	28	3	100	0.21
F/G/S100	1	25.4	1.26	32.0	100	65	Full	28	3	100	0.27
F/S125	1-1/4	31.7	1.56	39.6	100	65	Full	26	4	100	0.36
F/G/S150	1-1/2	38.1	1.83	46.5	100	65	Full	26	5	100	0.48
F/G/S200	2	50.8	2.38	60.4	100	65	Full	26	7	100	0.71
F/G250	2-1/2	63.5	2.89	73.4	70	48	Full	26	8	100	0.96
F/G/S300	3	76.2	3.44	87.4	70	45	Full	26	10	100	1.25
F/G400	4	101.6	4.57	116.1	60	40	Full	26	15	100	1.95
F/G600	6	152.4	6.77	172.0	40	25	28	22	25	100/20	3.76
G800	8	203.2	8.90	226.1	30	20	28	18	30	20	6.00

NOTE: Service life may vary depending on operating conditions and type of material being conveyed.

PETROLEUM

TIGERFLEX VAPOR HOSE

TIGER TV SERIES		
		
JABO PART#	SIZE	PSI RATING 68F/104F
034-10280	2"	17/6
*	3"	11/5
*	4"	9/4
*Non Stock - Call Jabo Supply		

Tigervapor™ Vapor Recovery Hose TV™ Series

**General Applications:**

- Tank truck vapor recovery

Construction:

Polyurethane (TPU) tube with rigid PVC helix and embedded grounding wire.

Service Temperature Range:

-40°F (-40°C) to +140°F (+60°C)*

PVC-THERMOPLASTIC

Nominal Specifications

Series Number	ID		OD^		Working Pressure (psi)		Vacuum Rating (in Hg)		Min Bending Radius (in at 68°F)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
TV202	2.02	51.3	2.46	62.5	17	6	21	12	3.0	100/60	0.51
TV303	3.03	77.0	3.57	90.7	11	5	18	10	3.5	100/60	0.78
TV404	4.04	102.6	4.61	117.1	9	4	13	8	4.5	100/60	1.10

PETROLEUM

TDH SERIES		
		
JABO PART#	SIZE	PSI RATING 68F/104F
*	2"	75/40
*	3"	70/35
034-10300	4"	65/30
*Non Stock - Call Jabo Supply		

Tigerdrop™ Clear

Drop Hose

TDH™ Series

Clear - "See-the-flow"



General Applications:

- Tank truck gravity drop fuel transfer

Construction:

Polyurethane (TPU) tube with polyester fabric reinforcement, rigid PVC helix and embedded grounding wire.

Service Temperature Range:

-40°F (-40°C) to +140°F (+60°C)*


Nominal Specifications

Series Number	ID		OD^		Working Pressure (psi)		Vacuum Rating (in Hg)		Min Bending Radius (in at 68°F)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
TDH202	2.02	51.3	2.66	67.6	75	40	Full	28	5	100/20	0.77
TDH303	3.03	77.0	3.78	96.0	70	35	Full	28	6	100/20	1.20
TDH404	4.04	102.6	4.82	122.4	65	30	Full	28	8	100/57/20	1.80

ROCK DUSTING

**CONTRACTOR GRADE PVC
SUCTION HOSE**

CLEAR WITH GREEN HELIX



EHCG

**EHGR / EHCW / EHCG
Series**
**Contractor Grade
PVC Suction Hose**
General Applications:

- Agricultural liquid fertilizer
- Air seeder lines
- Drain lines
- Irrigation lines
- Pumps, rental and construction dewatering
- Pumps, trash
- Rock dusting
- Water suction – standard duty

Construction:

PVC tube with rigid PVC helix.

Service Temperature:


-4°F (-20°C) to 150°F (+65°C)*

JABO PART#	SIZE	PSI RATING 68F/104F
*	3/4"	100/60
*	1"	75/55
034-10529	1-1/4"	75/55
034-10530	1-1/2"	65/45
034-10531	2"	60/40
*	2-1/2"	60/40
034-10533	3"	60/35
034-10534	4"	50/30
*	5"	40/25
*	6"	35/20
*	8"	30/20
*Non Stock - Call Jabo Supply		

Nominal Specifications

Part Numbers			ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius (in)	Std. Length (ft)	Weight (lbs/ft)
Solid Green	Clear w/ White Helix	Clear w/ Green Helix	(in)	(mm)	(in)	(mm)	at 68°F	at 104°F	at 68°F	at 104°F			
EHGR075	EHCW075	EHCG075	3/4	19.1	1.00	25.5	100	60	28	26	3	100	0.18
EHGR100	EHCW100	EHCG100	1	25.4	1.22	31.0	75	55	28	26	3	100	0.24
EHGR125	EHCW125	EHCG125	1 1/4	31.7	1.50	38.0	75	55	28	24	4	100	0.31
EHGR150	EHCW150	EHCG150	1 1/2	38.1	1.76	44.6	65	45	28	24	5	100	0.38
EHGR200	EHCW200	EHCG200	2	50.8	2.32	59.0	60	40	28	24	6	100	0.56
EHGR250	EHCW250	EHCG250	2 1/2	63.5	2.81	71.5	60	40	26	22	7	100	0.67
EHGR300	EHCW300	EHCG300	3	76.2	3.37	85.5	60	35	26	20	9	100	0.99
EHGR400	EHCW400	EHCG400	4	101.6	4.39	111.5	50	30	20	16	14	100	1.46
—	EHCW500	EHCG500	5	127.8	5.69	144.6	40	25	26	20	9	100	2.28
EHGR600	EHCW600	EHCG600	6	152.4	6.63	168.5	35	20	24	16	30	100/20	2.84
EHGR800	EHCW800	EHCG800	8	203.2	8.86	225.0	30	20	22	14	35	20	5.63

ROCK DUSTING

CONTRACTOR GRADE PVC
SUCTION HOSEEHGR SERIES **MSHA APPROVED**

EHGR

JABO PART#	SIZE	PSI RATING
		68F/104F
*	3/4"	100/60
*	1"	75/55
034-10479	1-1/4"	75/55
034-10480	1-1/2"	65/45
034-10500	2"	60/40
*	2-1/2"	60/40
034-10502	3"	60/35
034-10503	4"	50/30
*	5"	40/25
*	6"	35/20
*	8"	30/20
*Non Stock - Call Jabo Supply		

**EHGR / EHCW / EHCG
Series****Contractor Grade
PVC Suction Hose****General Applications:**

- Agricultural liquid fertilizer
- Air seeder lines
- Drain lines
- Irrigation lines
- Pumps, rental and construction dewatering
- Pumps, trash
- Rock dusting
- Water suction – standard duty

Construction:

PVC tube with rigid PVC helix.

Service Temperature:

-4°F (-20°C) to 150°F (+65°C)*

MSHA APPROVED**Nominal Specifications**

Part Numbers			ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius (in)	Std. Length (ft)	Weight (lbs/ft)
Solid Green	Clear w/ White Helix	Clear w/ Green Helix	(in)	(mm)	(in)	(mm)	at 68°F	at 104°F	at 68°F	at 104°F			
EHGR075	EHCW075	EHCG075	3/4	19.1	1.00	25.5	100	60	28	26	3	100	0.18
EHGR100	EHCW100	EHCG100	1	25.4	1.22	31.0	75	55	28	26	3	100	0.24
EHGR125	EHCW125	EHCG125	1 1/4	31.7	1.50	38.0	75	55	28	24	4	100	0.31
EHGR150	EHCW150	EHCG150	1 1/2	38.1	1.76	44.6	65	45	28	24	5	100	0.38
EHGR200	EHCW200	EHCG200	2	50.8	2.32	59.0	60	40	28	24	6	100	0.56
EHGR250	EHCW250	EHCG250	2 1/2	63.5	2.81	71.5	60	40	26	22	7	100	0.67
EHGR300	EHCW300	EHCG300	3	76.2	3.37	85.5	60	35	26	20	9	100	0.99
EHGR400	EHCW400	EHCG400	4	101.6	4.39	111.5	50	30	20	16	14	100	1.46
—	EHCW500	EHCG500	5	127.8	5.69	144.6	40	25	26	20	9	100	2.28
EHGR600	EHCW600	EHCG600	6	152.4	6.63	168.5	35	20	24	16	30	100/20	2.84
EHGR800	EHCW800	EHCG800	8	203.2	8.86	225.0	30	20	22	14	35	20	5.63

ROCKDUSTING

CONTRACTOR GRADE SUCTION HOSE

CLEAR WITH WHITE HELIX



EHCW

EHGR / EHCW / EHCW Series

Contractor Grade PVC Suction Hose

General Applications:

- Agricultural liquid fertilizer
- Air seeder lines
- Drain lines
- Irrigation lines
- Pumps, rental and construction dewatering
- Pumps, trash
- Rock dusting
- Water suction – standard duty

Construction:

PVC tube with rigid PVC helix.

Service Temperature:

-4°F (-20°C) to 150°F (+65°C)*

JABO PART#	SIZE	PSI RATING 68F/104F
034-10400	3/4"	100/60
034-10410	1"	75/55
034-10411	1-1/4"	75/55
034-10413	1-1/2"	65/45
034-10414	2"	60/40
034-10415	2-1/2"	60/40
034-10416	3"	60/35
034-10417	4"	50/30
*	5"	40/25
*	6"	35/20
*	8"	30/20
*Non Stock - Call Jabo Supply		

PVC-THERMOPLASTIC

Nominal Specifications

Part Numbers			ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius (in)	Std. Length (ft)	Weight (lbs/ft)
Solid Green	Clear w/ White Helix	Clear w/ Green Helix	(in)	(mm)	(in)	(mm)	at 68°F	at 104°F	at 68°F	at 104°F			
EHGR075	EHCW075	EHCW075	3/4	19.1	1.00	25.5	100	60	28	26	3	100	0.18
EHGR100	EHCW100	EHCW100	1	25.4	1.22	31.0	75	55	28	26	3	100	0.24
EHGR125	EHCW125	EHCW125	1 1/4	31.7	1.50	38.0	75	55	28	24	4	100	0.31
EHGR150	EHCW150	EHCW150	1 1/2	38.1	1.76	44.6	65	45	28	24	5	100	0.38
EHGR200	EHCW200	EHCW200	2	50.8	2.32	59.0	60	40	28	24	6	100	0.56
EHGR250	EHCW250	EHCW250	2 1/2	63.5	2.81	71.5	60	40	26	22	7	100	0.67
EHGR300	EHCW300	EHCW300	3	76.2	3.37	85.5	60	35	26	20	9	100	0.99
EHGR400	EHCW400	EHCW400	4	101.6	4.39	111.5	50	30	20	16	14	100	1.46
—	EHCW500	EHCW500	5	127.8	5.69	144.6	40	25	26	20	9	100	2.28
EHGR600	EHCW600	EHCW600	6	152.4	6.63	168.5	35	20	24	16	30	100/20	2.84
EHGR800	EHCW800	EHCW800	8	203.2	8.86	225.0	30	20	22	14	35	20	5.63



JABO SUPPLY CORPORATION

MILL & FIRE HOSE

MILL HOSE



FIRE HOSE

MSHA & NON MSHA APPROVED



MILL WASHDOWN & FIRE HOSE



JABO SUPPLY



5 LOCATIONS

PARKERSBURG, WV

10085 Emerson Avenue 26102
(304) 464-4400

MORGANFIELD, KY

118 Jim Veatch Road, 42437
(270) 389-3430

HUNTINGTON, WV

209 Braley Street, 25705
(304) 736-8333

NORTON, VA

205 Hawthorne Drive, 24273
(276) 679-1224

BEAVER, WV (BECKLEY)

227 C&O Shop Road 25813
(304-252-0000

SINCE 1964 SERVICE IS MORE THAN A PROMISE

MILL (WASHDOWN) HOSE

NOT INTENDED FOR FIRE FIGHTING

MILL DISCHARGE ASSEMBLIES

DOUBLE JACKET CONTRACTOR GRADE



NOT INTENDED FOR FIREFIGHTING

JABO PART#	SIZE	THREAD TYPE
*	1-1/2"	NST
*	1-1/2"	NPSH
*	2-1/2"	NST
*	2-1/2"	NPSH
*Non Stock - Call Jabo Supply		



DJ Series

Double Jacket "Contractor Grade"

Coupled with Male and Female Aluminum Rocker Lug Couplings

General Applications:

- Heavy duty equipment or pump rental
- Hydrant-to-truck water supply line
- Municipal washdown
- Ship deck washdown

Construction:

Double jacket with 100% polyester yarn. Water and mildew-resistant cover, will not rot, even if the hose is stored wet.

Service Temperature Range:

-25°F (-31°C) to +185°F (+85°C)



KURIYAMA
OF AMERICA, INC.

Since 1968

Nominal Specifications

Part Number	Size		Length (ft)	Thread Type	Max. Working Pressure (psi) at 68°F	Weight Each (lbs)
	(in)	(mm)				
DJ150NSTX50	1 1/2	38.1	50	NST	200	14
DJ150NPSHX50	1 1/2	38.1	50	NPSH	200	14
DJ250NSTX50	2 1/2	63.5	50	NST	200	23
DJ250NPSHX50	2 1/2	63.5	50	NPSH	200	23

MILL (WASHDOWN) HOSE

NOT INTENDED FOR FIRE FIGHTING

Synthetic Double Jacket Mill Hose



Application

- Ideal for open end discharge applications; not intended for fire fighting service



Features

- Consult Dixon® for pricing and availability of additional lengths and other configurations
- Double jacket hoses are not recommended for use with field reattachable couplings



Materials

- Outer construction: double jacket, all polyester
- Tube construction: black, PVC rubber

Specifications

- Rated pressure: 250 PSI at 70°F (21°C)
- Working pressure: 200 PSI at 70°F (21°C)

MILL & FIRE HOSE

Uncoupled



Size	Bowl	Length	Part #
1-1/2"	1-13/16"	50'	DM15-50UC
		100'	DM15-100UC
2"	2-5/16"	50'	DM20-50UC
		100'	DM20-100UC
2-1/2"	2-7/8"	50'	DM25-50UC
		100'	DM25-100UC

Coupled with female and male NST (NH) thread, rocker lug, aluminum expansion ring couplings



Size	Bowl	Length	Part #
1-1/2"	1-13/16"	50'	DM15-50RAF
		100'	DM15100RAF
2-1/2"	2-7/8"	50'	DM25-50RAF
		100'	DM25100RAF

Coupled with female and male NPSH thread, rocker lug, aluminum expansion ring couplings



Size	Bowl	Length	Part #
1-1/2"	1-13/16"	50'	DM15-50RAS
		100'	DM15100RAS
2"	2-5/16"	50'	DM20-50RAS
		100'	DM20100RAS
2-1/2"	2-7/8"	50'	DM25-50RAS
		100'	DM25100RAS

Coupled with female and male NPT thread, rocker lug, aluminum expansion ring couplings



Size	Bowl	Length	Part #
1-1/2"	1-13/16"	50'	DM15-50RAT
		100'	DM15100RAT
2"	2-5/16"	50'	DM20-50RAT
		100'	DM20100RAT
2-1/2"	2-7/8"	50'	DM25-50RAT

Coupled with female and male (C & E) global aluminum cam and groove, crimp sleeve



Size	Bowl	Length	Part #
1-1/2"	1-13/16"	50'	DM15-50GAX
		100'	DM15100GAX
2"	2-5/16"	50'	DM20-50GAX
		100'	DM20100GAX

SYNTHETIC SINGLE JACKET MILL HOSE

NOT INTENDED FOR FIRE FIGHTING

Application

- Used in open end water discharge applications only; not intended for firefighting service

Feature

- Consult Dixon® for pricing and availability on 75' lengths and other threads and configurations

Materials

- Outer construction: single jacket, all polyester
- Tube construction: black, PVC rubber

Specifications

- Rated pressure: **250 PSI** at ambient temperature **70°F (21°C)**
- Working pressure: **112 PSI** at ambient temperature **70°F (21°C)**



MILL & FIRE HOSE

Uncoupled

Size	Bowl	Length	Part #
1"	1-1/4"	50'	M10-50UC
		100'	M10-100UC
		300'	M10-300UC
1-1/2"	1-11/16"	25'	M15-25UC
		50'	M15-50UC
		100'	M15-100UC
2"	2-3/8"	25'	M20-25UC
		50'	M20-50UC
		100'	M20-100UC
2-1/2"	2-11/16"	25'	M25-25UC
		50'	M25-50UC
		100'	M25-100UC
3"	3-3/8"	25'	M30-25UC
		50'	M30-50UC
		100'	M30-100UC
4"	4-3/8"	25'	M40-25UC
		50'	M40-50UC
		100'	M40-100UC
6"	6-3/8"	25'	M60-25UC
		50'	M60-50UC

SYNTHETIC SINGLE JACKET MILL HOSE

NOT INTENDED FOR FIRE FIGHTING

Application

- Used in open end water discharge applications only; not intended for fire fighting service



MILL & FIRE HOSE

Feature

- Consult Dixon® for pricing and availability on 75' lengths and other threads and configurations

Materials

- Outer construction: single jacket, all polyester
- Tube construction: black, PVC rubber

Specifications

- Rated pressure: **250 PSI** at ambient temperature **70°F (21°C)**
- Working pressure: **125 PSI** at ambient temperature **70°F (21°C)**

Coupled with NPSH female and male expansion ring couplings



Size	Length	Part #
1-1/2"	50'	M15-50RAS
	100'	M15100RAS
2"	50'	M20-50RAS
	100'	M20100RAS
2-1/2"	50'	M25-50RAS
	100'	M25100RAS

Coupled with NST (NH) female and male expansion ring couplings



Size	Length	Part #
1-1/2"	50'	M15-50RAF
	100'	M15100RAF
2-1/2"	25'	M25-25RAF
	50'	M25-50RAF
	100'	M25100RAF

Coupled with MNPT x MNPT male expansion ring couplings



Size	Length	Part #
1-1/2"	50'	M15-50RAT
	100'	M15100RAT
2"	50'	M20-50RAT
	100'	M20100RAT

SYNTHETIC SINGLE JACKET MILL HOSE

NOT INTENDED FOR FIRE FIGHTING



MILL & FIRE HOSE

Application

- Used in open end water discharge applications only; not intended for fire fighting service



Feature

- Consult Dixon® for pricing and availability of additional lengths and other configurations

Materials

- Outer construction: single jacket, all polyester
- Tube construction: black, PVC rubber

Coupled with NPSH female and male King™ short shank couplings, crimp sleeve, aluminum shank with brass pin lug swivel nut

Size	Length	Working Pressure PSI at 70°F (21°C)	Part #
1-1/2"	25'	75	M15-25KAS
	50'		M15-50KAS
2"	25'	75	M20-25KAS
	50'		M20-50KAS
2-1/2"	25'	50	M25-25KAS
	50'		M25-50KAS
3"	25'	50	M30-25KAS
	50'		M30-50KAS



Coupled with NST (NH) female and male King™ short shank couplings, crimp sleeve, aluminum shank with brass pin lug swivel nut

Size	Length	Working Pressure PSI at 70°F (21°C)	Part #
1-1/2"	25'	75	M15-25KAF
	50'		M15-50KAF
2-1/2"	25'	50	M25-25KAF
	50'		M25-50KAF



Coupled with female and male (C & E) global aluminum cam and groove, crimp sleeve

Size	Length	Working Pressure PSI at 70°F (21°C)	Part #
1-1/2"	25'	112	M15-25GAX
	50'		M15-50GAX
2"	25'	112	M20-25GAX
	50'		M20-50GAX
2-1/2"	25'	112	M25-25GAX
	50'		M25-50GAX
3"	25'	112	M30-25GAX
	50'		M30-50GAX
4"	25'	112	M40-25GAX
	50'		M40-50GAX



FIRE FIGHTING HOSE

NON MSHA APPROVED



MILL & FIRE HOSE

ROCKER LUG BRASS NST (NH THREADS)

FIRE FIGHTING

JABO PART#	SIZE	LENGTH
*	1"	50'
*	1"	100'
*	1-1/2"	25'
034-12864	1-1/2"	50
*	1-1/2"	75
*	1-1/2"	100'
*	2-1/2"	25'
034-12866	2-1/2"	50
*	2-1/2"	75'
*	2-1/2"	100'
<i>*Non Stock - Call Jabo Supply</i>		

ROCKER LUG ALUMINUM (NPSH THREADS)

FIRE FIGHTING

JABO PART#	SIZE	LENGTH
*	1"	50'
*	1"	100'
*	1-1/2"	25'
034-12864	1-1/2"	50
*	1-1/2"	75
*	1-1/2"	100'
*	2-1/2"	25'
*	2-1/2"	50
*	2-1/2"	75'
*	2-1/2"	100'
<i>*Non Stock - Call Jabo Supply</i>		

Coupled with female and male expansion ring couplings

Size	Length	Rocker Lug Aluminum NST (NH) Part #	Rocker Lug Brass NST (NH) Part #	Rocker Lug Aluminum NPSH Part #
1"	50'	A510-50RAF	---	A510-50RAS
	100'	A510100RAF	---	A510100RAS
1-1/2"	25'	A515-25RAF	---	A515-25RAS
	50'	A515-50RAF	A515-50RBF	A515-50RAS
	75'	A515-75RAF	---	A515-75RAS
	100'	A515100RAF	A515100RBF	A515100RAS
2-1/2"	25'	A525-25RAF	---	A525-25RAS
	50'	A525-50RAF	A525-50RBF	A525-50RAS
	75'	A525-75RAF	---	---
	100'	A525100RAF	A525100RBF	A525100RAS



The Right Connection®

Specification Sheet

Single Jacket 500 Pound Test

- Rubber Lined
- 1", 1½", 1¾", 2", 2½", 3"

• Scope

Quality: The fire hose assembly supplied under this specification shall be constructed with superior quality materials. NFPA 1961 standards shall be observed in production of the assembly, in order to ensure its quality and durability.

Service Life: Hose furnished under these specifications will have a potential service life **warranty** of not less than **five years**; barring mistreatment that would render it unfit for service. Upon delivery, the hose shall be free from defects in workmanship and materials. Any defective hose will be replaced at no charge.

• Jacket Construction

The jackets will be woven evenly and be free of defects, including knots, lumps, or unsightly disfigurements that could jeopardize the integrity of the hose assembly. The warp yarn shall consist of staple polyester yarn. The use of filament or entangled yarn is expressly forbidden due to the lack of inherent abrasion resistance. The filler yarns shall be constructed of high strength, low elongation, filament polyester to reduce weight and increase flexibility.

• Abrasion Impregnation

Hose assemblies are available with polymer impregnation that provide additional abrasion resistance. Colors include: yellow, orange, red, tan, black, blue and green. Color shall be pure and even in each hose. Impregnated hose shall meet the requirements of Mil-H-24606B for abrasion resistance.

• Lining

The rubber lining shall be a single-ply extruded tube of synthetic EPDM compounded to resist ozone. The finished form shall be free of pits or other imperfections and have a smooth finish. No reclaimed rubber shall be used. Plastic tubes that sacrifice durability of the hose life for the sake of weight are not acceptable.

Backing: The backing shall be of adequate thickness to create a smooth waterway but not greater than .020. The fire hose constructed under this specification shall be manufactured fully backed.

Tensile Strength & Ultimate Elongation: Shall meet the standards of Underwriters Laboratories, Inc.™ as well as all other properties of UL-19 for rubber lined hoses. A valid U.S. Underwriters inspection procedure shall be in force at the time of bid.

• Hydrostatic Testing

Stock Lengths: Standard lengths are 50, 75 and 100 feet.

Size	1"	1½"	2"	2½"	3"
Part Number	A510	A515	A520	A525	A530
Test Pressure	500psi	500psi	500psi	500psi	400psi
Elongation	4%	5%	6%	7%	8%
Twist per foot	71° right	64° right	64° right	25° right	25° right
Warp	10"	10"	10"	10"	10"
Rise	4"	3"	1"	0	0
Burst Test	800psi	800psi	750psi	750psi	750psi
Kink Test	500psi	400psi	350psi	350psi	300psi

• Finished Hose

Markings: Beginning at a point not less than four feet from the end, each fifty foot section shall be stencilled in indelible ink with letters at least one inch high stating the name of the manufacturer, month and year of manufacture, and service test to 250 PSI per NFPA 1962. The ink used will be of a contrasting color.

Methods of Testing: All measurements and tests necessary to determine compliance of the fire hose specified requirements shall be made with ASTM, UL and NFPA 1961 designation, unless otherwise prescribed.

• Weights and Measures

Size	1"	1½" *	2" *	2½" *	3" *
Part Number	A510	A515	A520	A525	A530
Bowl Size	1¼"	1 ¾"	2 3/8"	2 13/16"	3 3/8"
Weight per 50' length Uncoupled	9 lbs.	13 lbs.	21 lbs.	24 lbs.	32 lbs.
Weight per 50' length Coupled	11 lbs.	14 lbs.	22 lbs.	25 lbs.	35 lbs.

* Available with a UL label add-on

• Couplings

As required by purchaser, expansion ring threaded, STORZ clamp ring, etc. Dixon Fire reserves the right to modify any specification without prior notice to meet or exceed changing standards. Customers are advised that special diameters or construction characteristics can be produced on special request. For more information, please contact your Dixon Fire authorized distributor.

Dixon Fire

FIRE FIGHTING HOSE

MSHA APPROVED



MILL & FIRE HOSE



Diameter	Part No.	Service Test	Proof Test	Burst Test	Bowl Size	Weight Uncoupled
1½"	SP15-MSHA	300 psi	600 psi	900 psi	1¾"	0.23 lbs/ft
2"	SP20-MSHA	300 psi	600 psi	900 psi	2¼"	0.33 lbs/ft
2½"	SP25-MSHA	300 psi	600 psi	900 psi	2¾"	0.39 lbs/ft
1½"	DP15-MSHA	400 psi	800 psi	1200 psi	1 15/16"	0.38 lbs/ft
2"	DP20-MSHA	400 psi	800 psi	1200 psi	2 2/5"	0.46 lbs/ft
2½"	DP25-MSHA	400 psi	800 psi	1200 psi	3"	0.64 lbs/ft

FIRE FIGHTING EQUIPMENT

COMMONLY USED FOR UNDERGROUND MINING

MILL & FIRE HOSE

MSHA APPROVED SINGLE JACKET
POLYESTER FIRE HOSE WITH NPSH ENDS



MSHA APPROVED SINGLE JACKET POLYESTER
FIRE HOSE WITH NPSH ENDS



MINE GUARDIAN FOG NOZZLE NPSH/IPT



BRASS INDUSTRIAL FOG NOZZLE



NPT RIGID FEMALE TO NPSH RIGID MALE
WITH CAP DRILLED



NPT RIGID FEMALE TO NPSH RIGID MALE
WITH CAP DRILLED



FIRE FIGHTING FITTINGS

COMMONLY USED FOR UNDERGROUND MINING

MILL & FIRE HOSE

NPSH SWIVEL FEMALE TO NPT FEMALE
(FXF)*Anodized Alum*

RH	A153RL1.5FIX1.5FTAP
----	---------------------

NPSH SWIVEL FEMALE TO NPT MALE (FXM)

*Anodized Alum*

RH	A154RL1.5FIX1.5MTAP
----	---------------------

NPSH SWIVEL FEMALE TO NPT FEMALE
(FXF)*BRASS*

JABO	027-16603
------	-----------

NPSH SWIVEL FEMALE TO NPT MALE (FXM)

*BRASS*

JABO	027-16604
------	-----------

WATER CURTIN

*NPSH ADAPTER ADDED BUT NOT SHOWN IN PHOTO*

RH	1269-2238 - A1371.5FIX1.5MN
----	-----------------------------

UNIVERSAL SPANNER WRENCH



1-6"

RH	W-101
----	-------

ADDITIONAL ITEMS AVAIL UPON REQUEST-CALL YOUR JABO CUSTOMER SERVICE REPRESENTATIVE FOR MORE INFORMATION

FIRE FIGHTING FITTINGS



MILL & FIRE HOSE

Female to Male Hex Nipple Brass



reducer



same size



increaser

JABO #	FEMALE	MALE	DIXON #
027-16541	2-1/2" FPT	2" MPT	FM2520T
027-16551	2" NPT	2-1/2" NST	FM2025F
027-16550	2" NPSH	2" NPT	FM20S20T
027-16552	2-1/2" NST	2" NPT	FM25F20T
027-16600	1-1/2" NST	1-1/2" NPT	FM15F15T

Female to Male Hex Nipples

Feature


- Other configurations are also available, consult Dixon for information



reducer



same size



increaser

Female Thread	Male Thread	Cast Brass Part #
3/4 GHT	1" NPT	FM7610T
1" NPSH	3/4" GHT	FM10S76
	3/4" GHT	FM1076
	1" NPSH	FM1010
1" NPT	1" NST (NH)	FM1010F
	1-1/2" NPSH	FM1015
	1-1/2" NST (NH)	FM1015F
1" NST (NH)	1" NPT	FM10F10T
	1-1/2" NPSH	FM1515
1-1/2" NPT	1-1/2" NST (NH)	FM1515F
	2-1/2" NST (NH)	FM1525F
	1-1/2" NPSH	FM15F15S
	1-1/2" NPT	FM15F15T
	2" NPT	FM15F20T
	2-1/2" NPT	FM15F25T
	2-1/2" NST (NH)	FM15F25F
	1-1/2" NST (NH)	FM15F15F
	1-1/2" NST (NH)	FM15S15F
1-1/2" NPSH	1-1/2" NPT	FM15S15T
	2" NPT	FM15S20T
	1-1/2" NPSH	FM20S15
2" NPSH	1-1/2" NST (NH)	FM20S15F
	1-1/2" NPT	FM20S15T
	2" NPT	FM20S20T
	2-1/2" NST (NH)	FM20S25F
	1-1/2" NPSH	FM2015
2" NPT	1-1/2" NST (NH)	FM2015F
	2" NPSH	FM2020
	2-1/2" NST (NH)	FM2025F
	3/4" NPT	FM25F75T
	1" NPT	FM25F10T
2-1/2" NST (NH)	1-1/2" NST (NH)	FM25F15F
	1-1/2" NPT	FM25F15T
	2" NPT	FM25F20T
	1-1/2" NST (NH)	FM2515F
2-1/2" NPT	2-1/2" NPSH	FM2525
	2-1/2" NST (NH)	FM2525F

Table continued on next page

FIRE FIGHTING FITTINGS



Female to Male Hex Nipples

Feature


- Other configurations are also available, consult Dixon for information



reducer



same size



increaser

Female Thread	Male Thread	Cast Brass Part #
3/4 GHT	1" NPT	FM7610T
1" NPSH	3/4" GHT	FM10S76
1" NPT	3/4" GHT	FM1076
	1" NPSH	FM1010
	1" NST (NH)	FM1010F
	1-1/2" NPSH	FM1015
1" NST (NH)	1-1/2" NST (NH)	FM1015F
1-1/2" NPT	1" NPT	FM10F10T
	1-1/2" NPSH	FM1515
	1-1/2" NST (NH)	FM1515F
	2-1/2" NST (NH)	FM1525F
1-1/2" NST (NH)	1-1/2" NPSH	FM15F15S
	1-1/2" NPT	FM15F15T
	2" NPT	FM15F20T
	2-1/2" NPT	FM15F25T
	2-1/2" NST (NH)	FM15F25F
	1-1/2" NST (NH)	FM15F15F
1-1/2" NPSH	1-1/2" NST (NH)	FM15S15F
	1-1/2" NPT	FM15S15T
	2" NPT	FM15S20T
	1-1/2" NPSH	FM20S15
2" NPSH	1-1/2" NST (NH)	FM20S15F
	1-1/2" NPT	FM20S15T
	2" NPT	FM20S20T
	2-1/2" NST (NH)	FM20S25F
2" NPT	1-1/2" NPSH	FM2015
	1-1/2" NST (NH)	FM2015F
	2" NPSH	FM2020
	2-1/2" NST (NH)	FM2025F
2-1/2" NST (NH)	3/4" NPT	FM25F75T
	1" NPT	FM25F10T
	1-1/2" NST (NH)	FM25F15F
	1-1/2" NPT	FM25F15T
	2" NPT	FM25F20T
	1-1/2" NST (NH)	FM2515F
2-1/2" NPT	2-1/2" NPSH	FM2525
	2-1/2" NST (NH)	FM2525F

FIRE FIGHTING FITTINGS

DOUBLE MALE HEX NIPPLE



reducer



same size



increaser

JABO #	MALE	MALE	DIXON #
027-16553	2" NPT	2" NPSH	DMH2020
027-16554	2" NPT	2-1/2" NPSH	DMH2025
027-16555	2" NPT	2-1/2" NST (NH)	DMH2025F
027-16601	1-1/2" NPT	1-1/2" NST (NH)	DMH1515F
027-16602	1-1/2" NPT	1-1/2" NPSH	DMH1515
027-16605	1-1/2" NPSH	1-1/2" NPSH	DMH15S15S

Double Male Hex Nipples

Feature

- Other configurations are available, consult Dixon® for information

Male Thread	Male Thread	Cast Brass Part #
3/4" NPT	1-1/2" NPSH	DMH7515
	1-1/2" NST (NH)	DMH7515F
1" NPT	3/4" GHT	DMH1076
	1" NPSH	DMH1010
	1" NST (NH)	DMH1010F
	1-1/2" NPSH	DMH1015
	1-1/2" NST (NH)	DMH1015F
	2-1/2" NST (NH)	DMH1025F
1-1/2" NPSH	1-1/2" NPSH	DMH15S15S
	1" NPSH	DMH1510
1-1/2" NPT	1" NST (NH)	DMH1510F
	1-1/2" NPSH	DMH1515
	1-1/2" NPT	DMH1515T
	1-1/2" NST (NH)	DMH1515F
	2" NPSH	DMH1520
	2-1/2" NST (NH)	DMH1525F
1-1/2" NST (NH)	1-1/2" NPSH	DMH15F15S
	1-1/2" NST (NH)	DMH15F15F
	2-1/2" NST (NH)	DMH15F25F
2" NPT	1-1/2" NPSH	DMH2015
	1-1/2" NST (NH)	DMH2015F
	2" NPSH	DMH2020
	2-1/2" NPSH	DMH2025
	2" NPT	DMH2020T
	2-1/2" NST (NH)	DMH2025F
2-1/2" NPT	1-1/2" NPSH	DMH2515
	1-1/2" NST (NH)	DMH2515F
	2" NPSH	DMH2520
	2-1/2" NPSH	DMH2525
	2-1/2" NST (NH)	DMH2525F
	2-1/2" NPT	DMH2525T
	3" NPSH	DMH2530



reducer



same size

FIRE FIGHTING FITTINGS

CONT FROM PREVIOUS PAGE:



MILL & FIRE HOSE

2-1/2" NST (NH)	3" NPT	DMH2530T
	3" NST (NH)	DMH2530F
	2-1/2" NST (NH)	DMH25F25F
	3" NST (NH)	DMH25F30F
3" NPT	2-1/2" NPSH	DMH3025
	2-1/2" NST (NH)	DMH3025F
	3" NPSH	DMH3030
	3" NST (NH)	DMH3030F
4" NPT	3" NPT	DMH3030T
4" NST (NH)	4" NPSH	DMH4040
	4" NST	DMH40F40F
4" NPT	4" NST (NH)	DMH4040F
	4-1/2" NST (NH)	DMH4045F
	4" NPT	DMH4040T
5" NPT	5" NST (NH)	DMH5050F
6" NPT	4-1/2" NST (NH)	DMH6045F
	6" NST (NH)	DMH6060F
	6" NPSH	DMH6060
	6" NPT	DMH6060T



increaser

FIRE FIGHTING FITTINGS

BRASS FEMALE SWIVEL TO MALE ADAPTER

PIN LUG



MILL & FIRE HOSE

JABO #	FEMALE	MALE	DIXON #
027-16604	1-1/2" NPSH	1-1/2 NPT	SM150S
FOR ADDITIONAL FITTINGS SEE DIXON CHART BELOW			

Brass Female Swivel to Male Adapters

Pin Lug

Female NST (NH) Thread	Male NPT Thread	Cast Brass Part #
1-1/2"	1-1/2"	SM150F
2-1/2"	1-1/2"	SM25F15T
	2"	SM25F20T
	2-1/2"	SM250F
	3"	SM25F30T
4"	4"	SM400F



Female NPSH Thread	Male NPT Thread	Cast Brass Part #
1-1/2"	1-1/2"	SM150S
2"	2"	SM200S
2-1/2"	2-1/2"	SM250S

Female Thread	Male NST (NH) Thread	Cast Brass Part #
1-1/2" NPSH	1-1/2"	SM15S15F
2-1/2" NST (NH)	3"	SM25F30F

Female Thread	Male NPT Thread	Cast Brass Part #
1-1/2" NYFD	1-1/2"	SM150NYFD
2-1/2" NYFD	2-1/2"	SM250NYFD

Rocker Lug

Female Thread	Male NPT Thread	Cast Brass Part #
1-1/2" NST (NH)	1-1/2"	RSM150F
1-1/2" NPSH		RSM150S
2-1/2" NST (NH)	2"	RSM25F20T
	2-1/2"	RSM250F
	3"	RSM25F30T



FIRE FIGHTING FITTINGS



(OPEN SNOOT) FEMALE SWIVEL ADAPTER

PIN LUG



JABO #	FEMALE	FEMALE	DIXON #
027-16603	1-1/2" NPSH	1-1/2" NPT	SF150S
FOR ADDITIONAL FITTINGS SEE DIXON CHART BELOW			

(Open Snoot) Female Swivel Adapters - Pin Lug

Feature

- Other configurations are available; consult Dixon® for information
- Finishes: -P polished, -C polished chrome plated

Specification

- Double female rigid hexagon to swivel connection, rigid end thread is always NPT, hose thread is on swivel end



Female Swivel Thread	Female Rigid Thread	Cast Brass Part #
1-1/2" NST (NH)	1-1/2" NPT	SF150F
1-1/2" NPSH		SF150S
2-1/2" NST (NH)	2" NPT	SF25F15T
2-1/2" NYFD		SF25F20T
2-1/2" NYFD	2-1/2" NPT	SF250NYFD
		SF250F
2-1/2" NST (NH)		SF250F-P
		SF250F-C
2-1/2" NPSH		SF250S
2-1/2" NST (NH)	3" NPT	SF25F30T
3" NST (NH)		SF300F
3" NYFD		SF300NYFD
4" NST (NH)	4" NPT	SF400F

FIRE FIGHTING FITTINGS

DOUBLE FEMALE SWIVELS

PIN LUG



MILL & FIRE HOSE

JABO #	FEMALE	FEMALE	DIXON #
027-16606	1-1/2" NPSH	1-1/2" NPT	DEP1515
FOR ADDITIONAL FITTINGS SEE DIXON CHART BELOW			

Double Female Swivels

Pin Lug

Female NPSH Thread	Female NPSH Thread	Cast Brass Part #
1-1/2"	1-1/2"	DFP1515
2-1/2"	2-1/2"	DFP2525

Female NST (NH) Thread	Female NST (NH) Thread	Cast Brass Part #
1-1/2"	1-1/2"	DFP1515F
2-1/2"	2-1/2"	DFP2525F

Female NST (NH) Thread	Female NPSH Thread	Cast Brass Part #
1-1/2"	1-1/2"	DFP15F15S
2-1/2"	2-1/2"	DFP25F25S

Female NYFD Thread	Female NYFD Thread	Cast Brass Part #
1-1/2"	1-1/2"	DFP15NYFD15NYFD
2-1/2"	2-1/2"	DFP25NYFD25NYFD



FIRE FIGHTING FITTINGS

HYDRANT ADAPTERS

ROCKER LUG



MILL & FIRE HOSE



reducer



same size

JABO #	FEMALE	MALE	DIXON #
027-16608	2-1/2" NST (NH)	1-1/2" NST (NH)	RHA2515F
027-16609	1-1/2" NPSH	1-1/2" NPT	RHA1515T
FOR ADDITIONAL FITTINGS SEE DIXON CHART BELOW			

Hydrant Adapters - Rocker Lug

Feature

- Other configurations are also available, consult Dixon® for information
- Finishes: -C polished chrome plated

Female Thread	Male Thread	Cast Brass Part #
1-1/2" NST (NH)	3/4" NST (NH)	RHA1576
	1" NST (NH)	RHA1510
	1" NST (NH)	RHA1510F
	1" NPT	RHA1510T
	1-1/2" NPSH	RHA1515
	1-1/2" NST (NH)	RHA1515F
	1-1/2" NPT	RHA1515T
	2" NPSH	RHA1520
1-1/2" NPSH	2-1/2" NST (NH)	RHA1525F
	3/4" NPT	RHA15S75T
	1" NPSH	RHA15S10
	1" NPT	RHA15S10T
	1-1/2" NST (NH)	RHA15S15F
1-1/2" NPT	1-1/2" NPT	RHA15S15T
2" NST (NH)	1-1/2" NST (NH)	RHA15T15F
	2-1/2" NST (NH)	RHA2025F
2-1/2" NST (NH)	3/4" GHT	RHA2576
	1" NPSH	RHA2510
	1" NST (NH)	RHA2510F
	1" NPT	RHA2510T
	1-1/2" NPSH	RHA2515
	1-1/2" NST (NH)	RHA2515F
	1-1/2" NPT	RHA2515T
	2" NST (NH)	RHA2520F
2-1/2" NPSH	2" NPT	RHA2520T
	2-1/2" NPT	RHA2525T
	3" NPT	RHA2530T
	1-1/2" NPSH	RHA25S15
	1-1/2" NST (NH)	RHA25S15F
	2-1/2" NPT	RHA25T25F
	2-1/2" NST (NH)	RHA25T25F
	3" NST (NH)	RHA3025F



reducer



reducer - chrome plated



same size



JABO

SUPPLY CORPORATION

CABLE GUARD-
RUBBER PROTECTION

PVC CABLE GUARD

SPLIT AND NON SPLIT AVAILABLE



SPLIT GUARD SHOWN ABOVE

RUBBER CABLE PROTECTION HOSE



CABLE GUARDING/ RUBBER CABLE PROTECTION

JABO SUPPLY



5 LOCATIONS

PARKERSBURG, WV

10085 Emerson Avenue 26102
(304) 464-4400

MORGANFIELD, KY

118 Jim Veatch Road, 42437
(270) 389-3430

HUNTINGTON, WV

209 Braley Street, 25705
(304) 736-8333

NORTON, VA

205 Hawthorne Drive, 24273
(276) 679-1224


BEAVER, WV (BECKLEY)

227 C&O Shop Road 25813
(304-252-0000

SINCE 1964 SERVICE IS MORE THAN A PROMISE

CABLE GUARD SPLIT

CABLE GUARD

PRE-SPLIT		
		
JABO PART#	SIZE	WORKING PSI 68F/104F
*	1"	NA/NA
*	1-1/4"	NA/NA
*	1-1/2"	NA/NA
034-31940	2"	12/6
*	2-3/8"	12/6
*	2-1/2"	10/5
034-31950	3"	8/4
*	3-1/2"	8/4
*	4"	6/3
*Non Stock - Call Jabo Supply		
ABOVE # FOR PRE-SPLIT		
CALL JABO FOR NON SPLIT		

“Cover Guard” CG™/CG-SL™ Series

PVC Ducting and Cover Protection Hose

General Applications:

- Cable and hose bundle protection (MSHA)
- Dust collection
- Ducting, ventilation and fume removal
- Mine supply line cover protection

Construction: PVC tube with rigid PVC helix.

Service Temperature Range:

-4°F (-20°C) to +150°F (+65°C)*

- **MSHA⁽⁰⁸⁾ Approved** – Meets U.S. Dept. of Labor Administration requirements for flame-resistance for use in mines for protection of hose bundles. Optional, special order, red or green colored helix also approved.



AVAILABLE IN SPLIT AND PRE-SPLIT FROM THE FACTORY

Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
CG-SL100	1	25.4	1.28	31.9	n/a	n/a	n/a	n/a	.5	100	0.14
CG-SL125	1-1/4	31.8	1.51	38.4	n/a	n/a	n/a	n/a	.75	100	0.18
CG-SL150	1-1/2	38.1	1.76	45.1	n/a	n/a	n/a	n/a	1	100	0.21
CG/CG-SL200	2	50.8	2.30	58.4	12	6	10	5	2	100	0.28
CG238	2-3/8	60.3	2.76	70.1	12	6	10	5	2	100	0.38
CG/CG-SL250	2-1/2	63.5	2.81	71.3	10	5	8	4	2	100	0.39
CG/CG-SL300	3	76.2	3.35	85.0	8	4	7	3	3	100	0.45
CG/CG-SL350	3-1/2	88.9	3.83	97.4	8	4	7	3	3	100	0.51
CG/CG-SL400	4	102.4	4.39	111.4	6	3	6	3	3	100	0.64

RUBBER CABLE PROTECTION HOSE**RUBBER CABLE PROTECTION
HOSE**

RUBBER



JABO PART#	SIZE	WORKING PSI 68F/104F
*	1/2"	75
*	5/8"	75
*	3/4"	75
*	1"	75
*	1-1/4"	75
*	1-1/2"	75
*	1-3/4"	75
*	2"	75
*	2-1/2"	75
*Non Stock - Call Jabo Supply		

MSHA
Accepted

T966AA Series

CABLE PROTECTION HOSE

General Applications:

Cable protection in underground mining operations. Also suitable for light duty air and water applications up to 75 psi working pressures.

Service Temperature Range:

-22°F (-30°C) to +176 °F (+80°C)

Branding:

ALFAGOMMA ITALY 966 CABLE COVER MSHA
IC-152/23 5 bar (75 psi) (in orange letters)

MSHA Accepted - Hose is accepted as having met the Interim Fire Criteria Acceptance of Products Taken Into Underground Mines per MSHA IC-152/23.

CABLE GUARD-RUBBER
PROTECTION

Nominal Specifications

Series Number	ID		OD		Max Rec. WP (psi)	Min. Bend Radius at 68°F (in)	Std. Length Coils (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)				
T966AA050	1/2	13	0.83	21	75	4	100	0.17
T966AA062	5/8	16	0.94	26	75	5	100	0.19
T966AA075	3/4	19	1.14	29	75	6	100	0.28
T966AA100	1	25	1.38	35	75	8	100	0.35
T966AA125	1 1/4	32	1.65	42	75	10	100	0.43
T966AA150	1 1/2	38	1.89	48	75	15	100	0.50
T966AA175	1 3/4	45	2.17	55	75	18	100	0.58
T966AA200	2	51	2.40	61	75	20	100	0.65
T966AA250	2 1/2	63	2.87	73	75	25	100	0.82




JABO SUPPLY CORPORATION

SLURRY -PUMP HOSE

SLURRY HOSE

HAND BUILT HOSE



SLURRY & PUMP HOSE

JABO SUPPLY



5 LOCATIONS

PARKERSBURG, WV

10085 Emerson Avenue 26102
(304) 464-4400

MORGANFIELD, KY

118 Jim Veatch Road, 42437
(270) 389-3430

HUNTINGTON, WV

209 Braley Street, 25705
(304) 736-8333

NORTON, VA

205 Hawthorne Drive, 24273
(276) 679-1224

BEAVER, WV (BECKLEY)

227 C&O Shop Road 25813
(304-252-0000

SINCE 1964 SERVICE IS MORE THAN A PROMISE

SLURRY HOSE

PURE GUM LINER

Novaflex 5000
Slurry King Hose Pure Gum Liner

Tough, versatile alternative to inflexible, cumbersome steel tubing. The easy handling and reusable quick-fastening flange system make installation a snap. Absorbs system vibration and saves wear on equipment. Compensates for thermal expansion and contraction, reduces noise. Flexible connection for hard piping misalignment. Can be cut on site for immediate installation. No welding necessary. Available with many inner tube compounds to meet specific material handling needs.

Construction:

Tube: Abrasion, red abrasion, black natural or pure gum
 Reinforcement: Fabric and helix wire

Cover: Ozone and ultra violet resistant

Temperature Range: -40°F (-40°C) to +160°F (+71°C)
 (depending on compound)

Length: 60 ft. Available in a variety of tube gauges ranging from: 1/8", 3/16", 1/4", 5/16", 3/8", 1/2"



Part No.	I.D.	O.D.	LINING THICKNESS (in)	MBR (in)	MAX PROD LENGTH (ft)	WP psi	WT LBS/FT
5000PG-02000-00	2	3.00	3/16	12	100	150	2.0
5000PG-03000-00	3	4.50	3/8	14	100	150	4.0
5000PG-04000-00	4	5.25	3/8	20	100	150	5.4
5000PG-05000-00	5	6.45	3/8	26	60	150	8.0
5000PG-06000-00	6	7.50	3/8	36	60	150	9.4
5000PG-08000-00	8	9.50	3/8	54	40	150	12.1
5000PG-10000-00	10	11.50	3/8	66	40	150	14.8
5000PG-12000-00	12	13.75	3/8	78	40	150	18.8
5000PG-14000-00	14	16.00	3/8	98	40	150	26.0

Optimum bend radius for maximum service life is 10 times the hose ID
Flanges Available

YELLOW ABRASION LINER

Novaflex 5000*
Slurry King Hose Yellow Abrasion Liner

Available with a variety of tube compounds including, black abrasion, red abrasion, black natural and pure gum for abrasion, oil, heat and corrosion resistance depending on applications.

Novaflex 5000RG - Red Gum for added abrasion resistance

Novaflex 5000YG - Yellow Novaware tube
superior abrasion resistance



Part No.	I.D.	O.D.	LINING THICKNESS (in)	MBR (in)	MAX PROD LENGTH (ft)	WP psi	WT LBS/FT
5000XX-02000-00	2	3.00	3/16	12	100	150	2.0
5000XX-03000-00	3	4.50	3/8	14	100	150	4.0
5000XX-04000-00	4	5.25	3/8	20	100	150	5.4
5000XX-05000-00	5	6.45	3/8	26	60	150	8.0
5000XX-06000-00	6	7.50	3/8	36	60	150	9.4
5000XX-08000-00	8	9.50	3/8	54	40	150	12.1
5000XX-10000-00	10	11.50	3/8	66	40	150	14.8
5000XX-12000-00	12	13.75	3/8	78	40	150	18.8
5000XX-14000-00	14	16.00	3/8	98	40	150	26.0

Flanges Available

XX= tube compound

ENGINEERED INDUSTRIAL HOSE (HAND BUILT)



SLURRY -PUMP HOSE

Jabo Supply works with the worlds leading manufactures when it comes to hand built hose assemblies. These hoses are custom built to your needs and fit into your existing set-up easily.

JABO SUPPLY HAS YEARS OF EXPERIENCE MEASURING AND PROVIDING AUTOCAD DRAWINGS FOR TOWNLEY HAND BUILT HOSES

SERIES 6000 MATERIAL HANDLING



The Series 6000 is the flagship of the hose line with the best utility for most applications. This medium-duty hose is available in lengths from 5 to 50 feet and 3" to 40" ID. With excellent flexibility for discharge duty and light suction, this hose can handle up to 150 PSI operating pressure.

MINING FLEX 200-300 PSI HOSE



For higher pressure ratings and field piping, our **Mining Flex** is considered the workhorse of mine sites both for Matrix or transport from the "face of the mine" to the plant and tailings discharge circuits. Designed for 200 to 300 PSI operating pressures. OTHER PSI AVAILABLE UPON REQUEST (UP TO 500PSI)

DATA

BURST PRESSURE DESIGN

SERIES 6000	3:1
MINING FLEX STD 200-300PSI	3:1
Mining flex can be designed to handle up to 500 psi operating pressure w/ 2:1 Safety Factor	


BEND RADIUS

SERIES 6000	8D
MINING FLEX	10D
Bend radius is calculated for "free or live hose" does not include fittings	



JABO SUPPLY CORPORATION

SS METAL HOSE

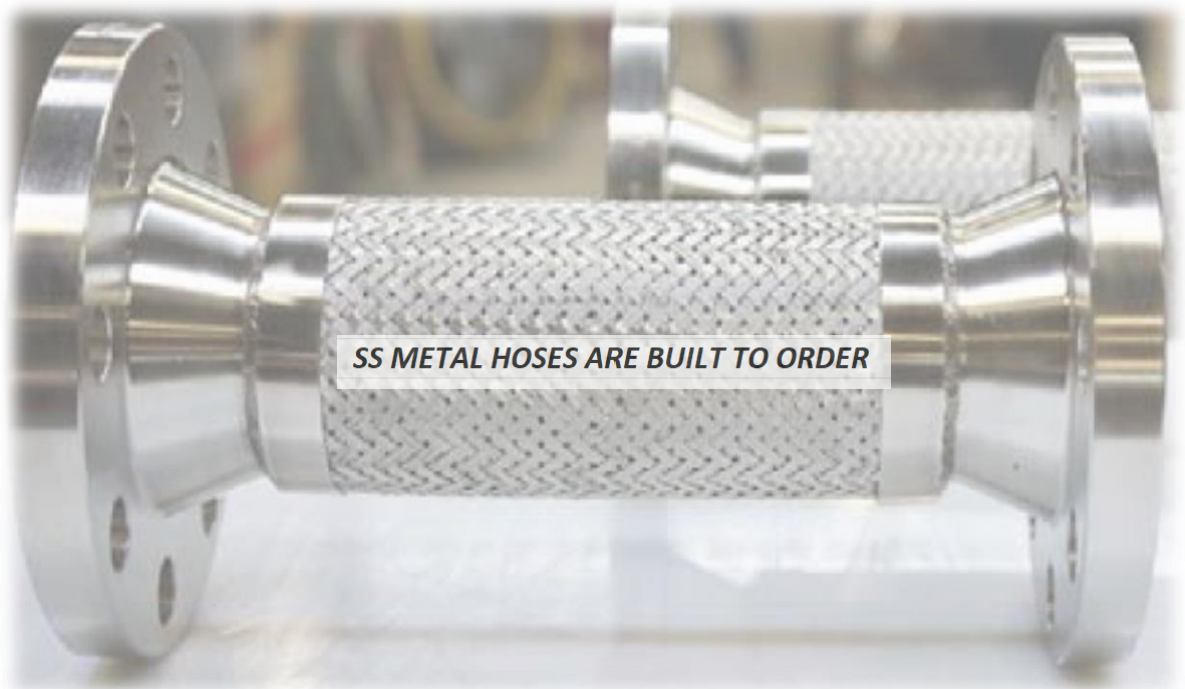

SS METAL HOSES ARE BUILT TO ORDER

STAINLESS STEEL METAL HOSE

SS METAL HOSES ARE BUILT TO ORDER

**CALL JABO
SUPPLY TO
ORDER**

**Size
*Temp of material
*Application
*Material to be used in the hose
*Pressure-
*End Connections
* Delivery*



JABO

SUPPLY CORPORATION

SKIRT BOARD RUBBER



SKIRT BOARD RUBBER

CAN BE SOURCED FROM DIFFERENT MANUFACTURES



KURIYAMA
OF AMERICA, INC.

Since 1968

JASON[®]
INDUSTRIAL

JABO SUPPLY



5 LOCATIONS

PARKERSBURG, WV

10085 Emerson Avenue 26102
(304) 464-4400

MORGANFIELD, KY

118 Jim Veatch Road, 42437
(270) 389-3430

HUNTINGTON, WV

209 Braley Street, 25705
(304) 736-8333

NORTON, VA

205 Hawthorne Drive, 24273
(276) 679-1224

BEAVER, WV (BECKLEY)

227 C&O Shop Road 25813
(304-252-0000

SINCE 1964 SERVICE IS MORE THAN A PROMISE

SKIRT BOARD RUBBER

**DUROMETER/HARDNESS-****Larger # Durometer the harder the rubber**

General Properties of 60 Durometer Skirtboard Rubber

- Excellent abrasion-resistance.
- Excellent weather-resistance

60 DUROMETER SKIRTBOARD RUBBER

SPECIFICATIONS:

Blended SBR/NR slit sheet, Plate Finish:

Style SK60: 60 Duro hardness (Shore Durometer A)

Polymer: Styrene-Butadiene and Isoprene Rubber, Natural

PACKAGING: 50 Ft. Rolls

Color: Black

Common Name: Skirtboard Rubber

ISO/ASTM Designation: SBR/NR

Style	ASTM Specification (SI units)	Temp. Range	Durometer	Tensile Strength (psi)	Elongation (%)	Finish
SK60	D 2000 M1AA 608	-22°F to +158°F	55 – 65	1050	300%	Plate

ORDERING INFORMATION:

Part Number	Gauge x Width (in)	Avg. Length (Linear Ft/Roll)	Approx. Lbs/Roll
SK60-08x3x50	1/4 x 3	50	23
SK60-08x4x50	1/4 x 4	50	30
SK60-08x5x50	1/4 x 5	50	38
SK60-08x6x50	1/4 x 6	50	45
SK60-08x8x50	1/4 x 8	50	61
SK60-08x10x50	1/4 x 10	50	76
SK60-08x12x50	1/4 x 12	50	91
SK60-12x3x50	3/8 x 3	50	34
SK60-12x4x50	3/8 x 4	50	45
SK60-12x5x50	3/8 x 5	50	57
SK60-12x6x50	3/8 x 6	50	68
SK60-12x8x50	3/8 x 8	50	91
SK60-12x10x50	3/8 x 10	50	114
SK60-12x12x50	3/8 x 12	50	136
SK60-16x3x50	1/2 x 3	50	45
SK60-16x4x50	1/2 x 4	50	61
SK60-16x5x50	1/2 x 5	50	76
SK60-16x6x50	1/2 x 6	50	91
SK60-16x8x50	1/2 x 8	50	121
SK60-16x10x50	1/2 x 10	50	151
SK60-16x12x50	1/2 x 12	50	182
SK60-24x3x50	3/4 x 3	50	68
SK60-24x6x50	3/4 x 6	50	136
SK60-24x8x50	3/4 x 8	50	182
SK60-24x9x50	3/4 x 9	50	205
SK60-24x10x50	3/4 x 10	50	227
SK60-24x12x50	3/4 x 12	50	273
SK60-32x3x50	1 x 3	50	91
SK60-32x6x50	1 x 6	50	182
SK60-32x8x50	1 x 8	50	242
SK60-32x10x50	1 x 10	50	303
SK60-32x12x50	1 x 12	50	363

CAN BE SOURCED FROM DIFFERENT MANUFACTURERS

SKIRT BOARD RUBBER

**DUROMETER/HARDNESS-****Larger # Durometer the harder the rubber**

SKIRT BOARD RUBBER

80 DUROMETER ECONOMY SKIRTBOARD RUBBER

SPECIFICATIONS:**Blended NR slit sheet, Plate Finish:****Style ESK80:** 80 Duro hardness (Shore Durometer A)**Polymer:** Natural and Synthetic Rubber**Color:** Black**Common Name:** Skirtboard Rubber**ISO/ASTM Designation:** NR

General Properties of 80 Durometer Skirtboard Rubber

- Excellent abrasion-resistance.
- Excellent weather-resistance.

PACKAGING: 50 Ft. Rolls**Tensile Strength:** 290 PSI**Elongation:** 100%**Applications:**

Slit to width for belt wipers, snow plow blades and squeegee use.

Style	ASTM Specification (SI units)	Temp. Range	Durometer	Tensile Strength (psi)	Elongation (%)	Finish
ESK80	D 2000 M1AA 802	-22°F to +158°F	75 – 85	290	100%	Plate

ORDERING INFORMATION:

Part Number	Gauge x Width (in)	Avg. Length (Linear ft/Roll)	Approx. lbs/Roll
ESK80-16x4x50	1/2 x 4	50	61
ESK80-16x6x50	1/2 x 6	50	91
ESK80-16x8x50	1/2 x 8	50	121
ESK80-24x6x50	3/4 x 6	50	137
ESK80-24x8x50	3/4 x 8	50	182
ESK80-32x6x50	1 x 6	50	182
ESK80-32x8x50	1 x 8	50	243
ESK80-32x10x50	1 x 10	50	303
ESK80-32x12x50	1 x 12	50	364

CAN BE SOURCED FROM DIFFERENT MANUFACTURES

HOSE FITTINGS



JABO SUPPLY CORPORATION

HOSE FITTINGS

KING CRIMP & CAMLOCKS



UNIVERSAL AIR FITTINGS



STRAINERS



CLAMPS



NOZZLES WATER/FUEL



BRASS FITTINGS



PRESSURE WASHER



PNEUMATIC QUICK DISCONNECTS



HOSE FITTINGS

HOSE FITTINGS MAY BE SOURCED FROM DIFFERENT MANUFACTURES



JABO SUPPLY CORPORATION

KING CRIMP &
CAMLOCKS

KING NIPPLES

HOSE

CAMLOCKS



KING CRIMP & CAMLOCKS

CAN BE SOURCED FROM DIFFERENT MANUFACTURES

JABO SUPPLY



5 LOCATIONS

PARKERSBURG, WV

10085 Emerson Avenue 26102
(304) 464-4400

MORGANFIELD, KY

118 Jim Veatch Road, 42437
(270) 389-3430

HUNTINGTON, WV

209 Braley Street, 25705
(304) 736-8333

NORTON, VA

205 Hawthorne Drive, 24273
(276) 679-1224

BEAVER, WV (BECKLEY)

227 C&O Shop Road 25813
(304-252-0000

SINCE 1964 SERVICE IS MORE THAN A PROMISE

COMBINATION HOSE NIPPLE (KING NIPPLE)

KING NIPPLE

Zinc Plated Steel



JABO PART#	SIZE
027-17720	1/2"
027-17730	3/4"
027-17800	1"
027-17810	1-1/4"
027-17820	1 1/2"
027-17830	2"
027-17835	2 1/2"
027-17840	3"
027-17850	4"
027-17860	6"
*	8"

***Non Stock-Call Jabo Supply**

KING NIPPLE

Stainless Steel 316



JABO PART#	SIZE
027-26210	1/2"
027-26220	3/4"
027-26240	1"
027-26241	1-1/4"
027-26242	1 1/2"
027-26250	2"
*	2 1/2"
027-26253	3"
*	4"
*	6"
*	8"

***Non Stock-Call Jabo Supply**

KING NIPPLE X VIC

Galvanized



JABO PART#	SIZE
*	1/2"
*	3/4"
*	1"
027-22030	1-1/4"
027-22040	1 1/2"
027-22042	2"
*	2 1/2"
027-22050	3"
027-22052	4"
027-22060	6"
*	8"

***Non Stock-Call Jabo Supply**

KING NIPPLE X VIC

Stainless Steel 316 VIC



JABO PART#	SIZE
*	1/2" -8"

***Non Stock-Call Jabo Supply**

HOSE MENDERS

Zinc Plated Steel



JABO PART#	SIZE
027-36060	1/2"
027-36080	3/4"
027-36100	1"
027-36140	1-1/4"
027-36160	1 1/2"
027-36180	2"
027-36190	2 1/2"
027-36220	3"
027-36240	4"
027-36260	6"
027-36280	8"

***Non Stock-Call Jabo Supply**

HOSE MENDERS

Stainless Steel



JABO PART#	SIZE
*	1/2"
027-36300	3/4"
027-36310	1"
027-36320	1-1/4"
027-36330	1 1/2"
027-36340	2"
*	2 1/2"
*	3"
*	4"
*	6"
*	8"

***Non Stock-Call Jabo Supply**

**CAN BE SOURCED
FROM DIFFERENT
MANUFACTURES**

CAMLOCKS ALUMINUM

**PART A MALE ADAPTER X
FEMALE NPT
ALUMINUM**


JABO PART#	SIZE
*	1/2"
027-14800	3/4"
027-15010	1"
027-15090	1-1/4"
027-15100	1-1/2"
027-15200	2"
027-15265	2-1/2"
027-15300	3"
027-15400	4"
027-15498	6"
*	8"
*Non Stock-Call Jabo Supply	

**Part B FEMALE COUPLER BY
MALE NPT
ALUMINUM**


JABO PART#	SIZE
*	1/2"
027-14820	3/4"
027-15020	1"
027-15091	1-1/4"
027-15110	1-1/2"
027-15210	2"
*	2 -1/2"
027-15310	3"
027-15410	4"
027-15499	6"
*	8"
*Non Stock-Call Jabo Supply	

**PART C FEMALE COUPLER X
HOSE SHANK
ALUMINUM**


JABO PART#	SIZE
*	1/2"
027-14850	3/4"
027-15024	1"
027-15092	1-1/4"
027-15111	1-1/2"
027-15215	2"
027-15260	2-1/2"
027-15315	3"
027-15415	4"
027-15481	6"
*	8"
*Non Stock-Call Jabo Supply	

**PART D FEMALE COUPLER X
FEMALE NPT
ALUMINUM**


JABO PART#	SIZE
*	1/2"
*	3/4"
027-15030	1"
027-15093	1-1/4"
027-15120	1-1/2"
027-15220	2"
027-15266	2-1/2"
027-15320	3"
027-15420	4"
027-15482	6"
*	8"
*Non Stock-Call Jabo Supply	

**CAN BE SOURCED
FROM DIFFERENT
MANUFACTURES**

CAMLOCKS ALUMINUM

**PART E MALE ADAPTER X
HOSE SHANK
ALUMINUM**


JABO PART#	SIZE
*	1/2"
027-14870	3/4"
027-15033	1"
027-15094	1-1/4"
027-15122	1 1/2"
027-15222	2"
027-15268	2 1/2"
027-15322	3"
027-15425	4"
027-15486	6"
*	8"
*Non Stock-Call Jabo Supply	

**PART F MALE ADAPTER X
MALE NPT
ALUMINUM**


JABO PART#	SIZE
*	1/2"
027-14900	3/4"
027-15040	1"
027-15096	1-1/4"
027-15130	1 1/2"
027-15230	2"
027-15270	2 1/2"
027-15330	3"
027-15430	4"
027-15488	6"
	8"
*Non Stock-Call Jabo Supply	

PART DC DUST CAP**ALUMINUM**

JABO PART#	SIZE
*	1/2"
027-14860	3/4"
027-15032	1"
027-15097	1-1/4"
*	1-1/2"
027-15240	2"
027-15267	2-1/2"
027-15340	3"
027-15440	4"
027-15484	6"
*	8"
*Non Stock-Call Jabo Supply	

PART DP DUST PLUG**ALUMINUM**

JABO PART#	SIZE
*	1/2"
027-14865	3/4"
027-15045	1"
027-15095	1-1/4"
027-15140	1-1/2"
027-15250	2"
027-15269	2-1/2"
027-15342	3"
027-15445	4"
027-15497	6"
*	8"
*Non Stock-Call Jabo Supply	

**CAN BE SOURCED
FROM DIFFERENT
MANUFACTURES**

CAMLOCKS STAINLESS STEEL

PART A MALE ADAPTER X
FEMALE NPT

STAINLESS STEEL (316)



JABO PART#	SIZE
*	1/2"
*	3/4"
027-14000	1"
*	1-1/4"
027-14002	1 1/2"
027-14003	2"
027-14004	2-1/2"
027-14005	3"
027-14006	4"
*	6"
*	8"
<i>*Non Stock-Call Jabo Supply</i>	

Part B FEMALE COUPLER BY
MALE NPT

STAINLESS STEEL (316)



JABO PART#	SIZE
*	1/2"
*	3/4"
027-14009	1"
*	1-1/4"
027-14011	1-1/2"
027-14012	2"
027-14013	2-1/2"
027-14014	3"
027-14015	4"
*	6"
*	8"
<i>*Non Stock-Call Jabo Supply</i>	

PART C FEMALE COUPLER X
HOSE SHANK

STAINLESS STEEL (316)



JABO PART#	SIZE
*	1/2"
*	3/4"
027-14018	1"
*	1-1/4"
027-14020	1-1/2"
027-14021	2"
027-14022	2-1/2"
027-14023	3"
027-14024	4"
*	6"
*	8"
<i>*Non Stock-Call Jabo Supply</i>	

PART D FEMALE COUPLER X
FEMALE NPT

STAINLESS STEEL (316)



JABO PART#	SIZE
*	1/2"
*	3/4"
027-14027	1"
*	1-1/4"
027-14029	1-1/2"
027-14030	2"
027-14031	2-1/2"
027-14032	3"
027-14033	4"
*	6"
*	8"
<i>*Non Stock-Call Jabo Supply</i>	

**CAN BE SOURCED
FROM DIFFERENT
MANUFACTURES**

CAMLOCKS STAINLESS STEEL

PART E MALE ADAPTER X
HOSE SHANK

STAINLESS STEEL (316)



JABO PART#	SIZE
*	1/2"
*	3/4"
027-14036	1"
*	1-1/4"
027-14038	1-1/2"
027-14039	2"
027-14040	2-1/2"
027-14041	3"
027-14042	4"
*	6"
*	8"
<i>*Non Stock-Call Jabo Supply</i>	

PART F MALE ADAPTER X
MALE NPT

STAINLESS STEEL (316)



JABO PART#	SIZE
*	1/2"
*	3/4"
027-14045	1"
*	1-1/4"
027-14047	1-1/2"
027-14048	2"
027-14049	2-1/2"
027-14050	3"
027-14051	4"
*	6"
*	8"
<i>*Non Stock-Call Jabo Supply</i>	

PART DC DUST CAP

STAINLESS STEEL (316)



JABO PART#	SIZE
*	1/2"
*	3/4"
027-14054	1"
*	1-1/4"
027-14056	1-1/2"
027-14057	2"
027-14058	2-1/2"
027-14059	3"
027-14060	4"
*	6"
*	8"
<i>*Non Stock-Call Jabo Supply</i>	

PART DP DUST PLUG

STAINLESS STEEL (316)



JABO PART#	SIZE
*	1/2"
*	3/4"
027-14063	1"
*	1-1/4"
027-14065	1-1/2"
027-14066	2"
027-14067	2-1/2"
027-14068	3"
027-14069	4"
*	6"
*	8"
<i>*Non Stock-Call Jabo Supply</i>	

**CAN BE SOURCED
FROM DIFFERENT
MANUFACTURES**

CAMLOCKS POLYPROPYLENE

**PART A MALE ADAPTER X
FEMALE NPT
POLYPROPYLENE**



JABO PART#	SIZE
027-16610	1/2"
027-16611	3/4"
027-16612	1"
027-16613	1-1/4"
027-16614	1-1/2"
027-16615	2"
*	2-1/2"
027-16616	3"
027-16617	4"
*	6"
*	8"
*Non Stock-Call Jabo Supply	

**Part B FEMALE COUPLER BY
MALE NPT
POLYPROPYLENE**



JABO PART#	SIZE
027-16619	1/2"
027-16620	3/4"
027-16621	1"
027-16622	1-1/4"
027-16623	1-1/2"
027-16624	2"
*	2-1/2"
027-16625	3"
027-16626	4"
*	6"
*	8"
*Non Stock-Call Jabo Supply	

**PART C FEMALE COUPLER X
HOSE SHANK
POLYPROPYLENE**



JABO PART#	SIZE
027-16628	1/2"
027-16629	3/4"
027-16630	1"
027-16631	1-1/4"
027-16632	1-1/2"
027-16633	2"
*	2-1/2"
027-16634	3"
027-16635	4"
*	6"
*	8"
*Non Stock-Call Jabo Supply	

**PART D FEMALE COUPLER X
FEMALE NPT
POLYPROPYLENE**



JABO PART#	SIZE
027-16637	1/2"
027-16638	3/4"
027-16639	1"
*	1-1/4"
027-16641	1-1/2"
027-16642	2"
*	2-1/2"
027-16643	3"
027-16644	4"
*	6"
*	8"
*Non Stock-Call Jabo Supply	

**CAN BE SOURCED
FROM DIFFERENT
MANUFACTURES**

CAMLOCKS POLYPROPYLENE

PART E MALE ADAPTER X
HOSE SHANK

POLYPROPYLENE



JABO PART#	SIZE
027-16646	1/2"
027-16647	3/4"
027-16648	1"
027-16649	1-1/4"
027-16650	1-1/2"
027-16651	2"
*	2-1/2"
027-16652	3"
027-16653	4"
*	6"
*	8"
<i>*Non Stock-Call Jabo Supply</i>	

PART F MALE ADAPTER X
MALE NPT

POLYPROPYLENE



JABO PART#	SIZE
027-16655	1/2"
027-15656	3/4"
027-16657	1"
027-16658	1-1/4"
027-16659	1-1/2"
027-16660	2"
*	2-1/2"
027-16661	3"
027-16662	4"
*	6"
*	8"
<i>*Non Stock-Call Jabo Supply</i>	

PART DC DUST CAP

POLYPROPYLENE



JABO PART#	SIZE
*	1/2"
027-16664	3/4"
027-16665	1"
*	1-1/4"
027-16666	1-1/2"
027-16667	2"
*	2-1/2"
027-16668	3"
027-16669	4"
*	6"
*	8"
<i>*Non Stock-Call Jabo Supply</i>	

PART DP DUST PLUG

POLYPROPYLENE



JABO PART#	SIZE
*	1/2"
027-16671	3/4"
027-16672	1"
*	1-1/4"
027-16673	1-1/2"
027-16674	2"
*	2-1/2"
027-16675	3"
027-16676	4"
*	6"
*	8"
<i>*Non Stock-Call Jabo Supply</i>	

**CAN BE SOURCED
FROM DIFFERENT
MANUFACTURES**

CAMLOCK GASKETS

BUNA GASKET

TEMP RANGE -40F TO 250F



JABO PART#	SIZE
027-15696	3/4"
027-15697	1"
027-15698	1-1/4"
027-15699	1-1/2"
027-15700	2"
027-15701	2-1/2"
027-15702	3"
027-15703	4"
027-15705	6"
*	8"
*	10"
*Non Stock-Call Jabo Supply	

EPDM GASKET

TEMP RANGE -60F TO 300F



JABO PART#	SIZE
*	1"
*	1-1/4"
*	1-1/2"
*	2"
*	2-1/2"
*	3"
*	4"
*Non Stock-Call Jabo Supply	

VITON GASKET

TEMP RANGE -20 TO 400F



JABO PART#	SIZE
*	1/2"
*	3/4"
*	1"
*	1-1/4"
027-15710	1-1/2"
027-15711	2"
*	2-1/2"
027-15712	3"
027-15713	4"
*Non Stock-Call Jabo Supply	

**CAN BE SOURCED
FROM DIFFERENT
MANUFACTURES**



JABO SUPPLY CORPORATION

UNIVERSAL AIR -
CHICAGO COUPLINGS

TWO LUG



FOUR LUG



OTHERS



UNIVERSAL AIR COUPLINGS

aka Chicago Style Couplings

CAN BE SOURCED FROM DIFFERENT MANUFACTURES

JABO SUPPLY



5 LOCATIONS

PARKERSBURG, WV

10085 Emerson Avenue 26102
(304) 464-4400

MORGANFIELD, KY

118 Jim Veatch Road, 42437
(270) 389-3430

HUNTINGTON, WV

209 Braley Street, 25705
(304) 736-8333

NORTON, VA

205 Hawthorne Drive, 24273
(276) 679-1224

BEAVER, WV (BECKLEY)

227 C&O Shop Road 25813
(304-252-0000

SINCE 1964 SERVICE IS MORE THAN A PROMISE

UNIVERSAL AIR COUPLINGS

UNIVERSAL AIR HOSE (CHICAGO STYLE COUPLINGS)

2-LUG HOSE COUPLING

ZINC PLATED STEEL



JABO PART#	SIZE
*	3/8"
*	1/2"
027-50680	3/4"
027-50790	1"
<i>*Non Stock-Call Jabo Supply</i>	

4-LUG HOSE COUPLING

ZINC PLATED STEEL



JABO PART#	SIZE
*	1-1/4"
*	1-1/2"
*	2"
<i>*Non Stock-Call Jabo Supply</i>	

2-LUG MALE THREADED

ZINC PLATED STEEL
NPT THREADS



JABO PART#	SIZE
*	1/4"
*	3/8"
027-50640	1/2"
027-50700	3/4"
027-50800	1"
<i>*Non Stock-Call Jabo Supply</i>	

2-LUG FEMALE THREADED

NPT THREADS



JABO PART#	SIZE
*	1/4"
*	3/8"
027-50650	1/2"
027-50720	3/4"
027-50820	1"
<i>*Non Stock-Call Jabo Supply</i>	

4-LUG FEMALE THREADED

NPT THREADS



JABO PART#	SIZE
*	1-1/4"
*	1-1/2"
*	2"
<i>*Non Stock-Call Jabo Supply</i>	

RUBBER WASHER

2 Lug Only



JABO PART#	SIZE
027-52010	3/8-1" TWO LUG

2 lug only

RUBBER WASHER

4 Lug



JABO PART#	SIZE
*	4Lug
SEE Dixon AWR14	

**CAN BE SOURCED
FROM DIFFERENT
MANUFACTURES**

UNIVERSAL AIR - CHICAGO
COUPLINGS

UNIVERSAL AIR COUPLINGS

UNIVERSAL AIR HOSE (CHICAGO STYLE COUPLINGS)

UNIVERSAL AIR - CHICAGO
COUPLINGS

AIR KING CLAMP

ZINC PLATED STEEL



JABO PART#	SIZE	Hose OD From	Hose OD To	MATERIAL
*	1/2"	1"	1-12/64"	Plated Iron
027-50740	3/4"	1-8/64"	1-20/64"	Cast Carbon Steel
*	1"	1-20/64"	1-32/64"	Cast Carbon Steel
	1"	1-32/64"	1-52/64"	Plated Iron
<i>*Non Stock-Call Jabo Supply</i>				

3 WAY (2LUG TRIPLE CONNECTION)

ZINC PLATED STEEL



JABO PART#	SIZE
027-50760	3/4"

2 LUG BLANK

ZINC PLATED STEEL



JABO PART#	SIZE
*	3/4"
Ref to GAM10	

**CAN BE SOURCED
FROM DIFFERENT
MANUFACTURES**

STRAINERS



JABO

SUPPLY CORPORATION

STRAINERS

ROUND HOLE



TOP HOLE



LONG HOLE



SQUARE HOLE



STRAINERS

CAN BE SOURCED FROM DIFFERENT MANUFACTURES

STRAINERS

STRAINERS (ROUND,TOP,LONG HOLE)

ROUND HOLE

ZINC PLATED STEEL	
NPSM THREADS	
	
JABO PART#	SIZE
*	1- 1/2"
027-73022	2"
027-73032	3"
027-73034	4"
027-73036	6"
*	8"
*	10"
AVAILABLE SIZES 1-1/2"-10"	
*Non Stock-Call Jabo Supply	

TOP HOLE

ZINC PLATED STEEL	
NPSM THREADS	
	
JABO PART#	SIZE
027-73001	1 1/2"
027-73002	2"
*	3"
AVAILABLE SIZES 1-1/2"-3"	
*Non Stock-Call Jabo Supply	

LONG HOLE

ZINC PLATED STEEL	
NPSM THREADS	
	
JABO PART#	SIZE
027-73010	1- 1/2"
027-73020	2"
027-73030	3"
AVAILABLE SIZES 1-1/2"-3"	
*Non Stock-Call Jabo Supply	

STRAINERS

SQUARE HOLE

ZINC PLATED STEEL	
NPSM THREADS	
	
JABO PART#	SIZE
*	1- 1/2"
*	2"
*	3"
*	4"
*	6"
*	8"
*	10"
AVAILABLE SIZES 1-1/2"-10"	
*Non Stock-Call Jabo Supply	

**CAN BE SOURCED
FROM DIFFERENT
MANUFACTURES**



JABO SUPPLY CORPORATION

PUNCH LOCKS



SPIRAL DOUBLE BOLT



HD T-BOLT



WORM GEAR CLAMPS



CLAMPS

CAN BE SOURCED FROM DIFFERENT MANUFACTURES

JABO SUPPLY



5 LOCATIONS

PARKERSBURG, WV

10085 Emerson Avenue 26102
(304) 464-4400

MORGANFIELD, KY

118 Jim Veatch Road, 42437
(270) 389-3430

HUNTINGTON, WV

209 Braley Street, 25705
(304) 736-8333

NORTON, VA

205 Hawthorne Drive, 24273
(276) 679-1224

BEAVER, WV (BECKLEY)

227 C&O Shop Road 25813
(304-252-0000



SINCE 1964 SERVICE IS MORE THAN A PROMISE

CLAMPS

PUNCH LOCK GALVANIZED CLAMPS

PUNCH LOCK CLAMPS

PUNCH LOCK CLAMPS

Galvanized Kuriyama Brand			Galvanized Dixon Brand K Series		
					
JABO PART#	SIZE	Manufacture	JABO PART#	SIZE	Manufacture
*	13/16"	NA	*	13/16"	K3
*	1 3/8"	NA	*	1 3/8"	K311
027-38086	1"	CPCS04	*	1"	K4
027-38088	1 1/4"	CPCS05	*	1 1/4"	K5
027-38090	1 1/2"	CPCS06	*	1 1/2"	K6
NA	1 3/4"	NA	027-38800	1 3/4"	K7
027-38120	2"	CPCS08	027-38820	2"	K8
027-38158	2 1/4"	CPCS09	*	2 1/4"	K9
027-38160	2 1/2"	CPCS10	027-38840	2 1/2"	K10
*	2 3/4"	CPCS11	*	2 3/4"	K11
027-38172	3"	CPCS12	027-38890	3"	K12
027-38218	3 1/2"	CPCS14	*	3 1/2"	K14
027-38220	4"	CPCS16	027-38910	4"	K16
*	4 1/2"	CPCS18	027-38912	4 1/2"	K-18
027-38222	5"	CPCS20	027-38920	5"	K20
027-38245	6"	CPCS24	027-38940	6"	K24
	6-1/2"	CPCS26	NA	6-1/2"	
*	7"	CPCS28	027-38960	7"	K28
027-38260	8"	CPCS32	027-38980	8"	K32
027-38310	10"	CPCS40	NA	10"	NA
<i>*Non Stock-Call Jabo Supply</i>			<i>*Non Stock-Call Jabo Supply</i>		

PUNCH LOCK CLAMP

TOOL

SOLD SEPARATE

	
JABO PART#	SIZE
027-38080	TOOL



CLAMPS

PUNCH LOCK SS CLAMPS

CLAMPS

PUNCH LOCK CLAMPS			PUNCH LOCK CLAMPS		
Stainless Steel 316			Stainless Steel 316		
Kuriyama Brand			Dixon Brand KS Series		
					
JABO PART#	SIZE	Manufacture	JABO PART#	SIZE	Manufacture
*	13/16"	NA	**	13/16"	KS3
*	1 3/8"	NA	*	1 3/8"	KS311
027-38087	1"	CPSS04	*	1"	KS4
027-38089	1 1/4"	CPSS05	*	1 1/4"	KS5
027-38091	1 1/2"	CPSS06	*	1 1/2"	KS6
*	1 3/4"	NA	027-38801	1 3/4"	KS7
027-38100	2"	CPSS08	027-38821	2"	KS8
*	2 1/4"	NA	*	2 1/4"	KS9
027-38170	2 1/2"	CPSS10	027-38841	2 1/2"	KS10
*	2 3/4"	CPSS11	*	2 3/4"	KS11
*	3"	CPSS12	*	3"	KS12
027-38219	3 1/2"	CPSS14	027-38894	3 1/2"	KS14
*	4"	CPSS16	*	4"	KS16
027-38221	4 1/2"	CPSS18	027-38914	4 1/2"	KS18
*	5"	CPSS20	*	5"	KS20
027-38240	6"	CPSS24	*	6"	KS24
027-38241	6 1/2"	CPSS26	*	6 1/2"	NA
*	7"	CPSS28	*	7"	KS28
027-38270	8"	CPSS32	*	8"	KS32
*	10"	CPSS40	*	10"	NA
<i>*Non Stock-Call Jabo Supply</i>			<i>*Non Stock-Call Jabo Supply</i>		

PUNCH LOCK CLAMP

TOOL

SOLD SEPARATE



Unless noted by customer Jabo Supply reserves the right to deliver either Kuriyama or Dixon brands based on availability

CLAMPS

DOUBLE BOLT, T-BOLT, WORM GEAR CLAMPS

SPIRAL DOUBLE BOLT CLAMPS

ZINC PLATED CARBON STEEL



JABO PART#	SIZE
027-54080	1 1/2"
027-54082	2"
*	2 1/4"
*	2 1/2"
027-54084	3"
*	3 1/2"
027-54086	4"
*	5"
027-54088	6"
*	8"
*	10"
*	12"

***Non Stock-Call Jabo Supply**
 FOR (Counterclockwise Spiral
 Hose) Designed for Tigerflex
 PVC Suction Hoses

HEAVY DUTY T-BOLT CLAMPS

STAINLESS STEEL 304



JABO PART#	SIZE
*	21/32-3/4"
*	25/32-7/8"
*	29/32 - 1"
*	1 1/32 - 1 3/32"
*	1 5/32 - 1 5/16"
*	1 1/4 - 1 3/8"
027-39270	1 3/8 - 1 9/16"
027-39275	1 5/8 - 1-1 3/16"
027-39280	1 3/4 - 1 15/16"
027-39285	1 7/8 - 2 1/16"
027-39290	2 1/8 - 2 5/16"
*	2 1/4 - 2 7/16"
027-39300	2 3/8 - 2 9/16"
027-39305	2 17/32 - 2 13/16"
*	2 21/32 - 2 15/16"
*	2 29/32 - 3 3/16"
*	3 1/32 - 3 5/16"
027-39310	3 9/32 - 3 9/16"
027-39315	3 17/32 - 3 13/16"
*	3 25/32 - 4 1/16"
027-39320	4 1/32 - 4 5/16"
027-39325	4 17/32 - 4 13/16"
*	4 25/32 - 5 1/16"
*	5 9/32 - 5 9/16"
*	5 17/32 - 5 13/16"
*	5 7/8 - 6 11/32"
*	6 17/32 - 6 13/16"
*	6 7/8 - 7 7/8"
*	7 13/32 - 7 7/8"
*	7 29/32 - 8 3/8"
*	8 21/32 - 8 15/16"
*	8 15/16 - 9 13/32"
*	9 7/16 - 9 29/32"

***Non Stock-Call Jabo Supply**

WORM GEAR CLAMPS

SS CLAMP



JABO PART#	SIZE
019-77830	1/4 - 5/8 "
019-77840	7/16 - 5/8"
019-79980	7/16 - 25/32"
019-79985	1/2-1"
019-79990	9/16 - 1-1/16"
019-80000	11/16 - 1-1/4"
019-80060	13/16 - 1-1/2"
019-80080	13/16 - 1-3/4"
019-80120	1-1/6 - 2 "
019-80160	1-5/16 2-1/4 "
019-80200	1-5/8 2-1/2"
019-80260	1-3/4 2-3/4"
019-80280	2-1/16 - 3"
019-80300	2-5/16 3-1/4 "
019-80340	2-1/2 3-1/2"
019-80380	2-13/16 3-3/4"
019-80390	3-1/6 - 4"
019-80395	3-5/16 4-1/4"
019-80400	3-1/2 4-1/2 "
019-80460	2 - 5 "
019-80480	2-1/2 5-1/2"
019-80600	3-1/8 6"
019-80660	3-1/2 6-1/2"
019-80900	4-1/8 7 "
019-80920	5/8 - 8 1/2"
019-80940	7 1/8 - 10"

***Non Stock-Call Jabo Supply**

**CAN BE SOURCED
 FROM DIFFERENT
 MANUFACTURES**

CLAMPS

NOZZLES



JABO SUPPLY CORPORATION

NOZZLES

WATER



WATER ACCESSORIES



FUEL



1" diesel nozzle



3/4" gasoline nozzle



3/4" diesel nozzle

NOZZELS WATER/FUEL

CAN BE SOURCED FROM DIFFERENT MANUFACTURES

JABO SUPPLY



5 LOCATIONS

PARKERSBURG, WV

10085 Emerson Avenue 26102
(304) 464-4400

MORGANFIELD, KY

118 Jim Veatch Road, 42437
(270) 389-3430

HUNTINGTON, WV

209 Braley Street, 25705
(304) 736-8333

NORTON, VA

205 Hawthorne Drive, 24273
(276) 679-1224

BEAVER, WV (BECKLEY)

227 C&O Shop Road 25813
(304-252-0000

SINCE 1964 SERVICE IS MORE THAN A PROMISE

NOZZLES

HOSE SPRAY NOZZLES

BRASS INDUSTRIAL FOG NOZZLE

NPSH THREADS



JABO PART# SIZE

027-71510 1"

027-71520 1-1/2"

* 2"

* 2-1/2"

***Non Stock-Call Jabo Supply**

Industrial Fog Nozzles

Features

- Delivers 30° - 60° - 90° fog pattern - shut-off - straight stream - fog
- Supplied with bumper

Approval

- UL listed and Factory Mutual approved for class A and B fires (except noted ^{1,2})

Specification

- Maximum operating pressure: 175 PSI (water only) at 70°F (21°C)

Size	Thread	90° Spray GPM @ 100 PSI	Brass Part #
3/4"	GHT	---	BFN75GHT ¹
1"	NPSH	---	BFN75
1-1/2"		32	BBN100
2"		85	BFN150
2-1/2"		108	BFN200 ^{1,2}
1"		205	BFN250
1-1/2"	NST (NH)	32	BFN100NST
2-1/2"		85	BFN150NST
		205	BFN250NST ²

¹ Not UL Listed

² Not Factory Mutual approved

HIGH PRESSURE BRASS INDUSTRIAL FOG NOZZLE

NPSH THREADS



JABO PART# SIZE

027-71540 1-1/2"

***Non Stock-Call Jabo Supply**

High Pressure Industrial Fog Nozzles

Features

- Combination straight stream and fog - shut-off - straight stream - fog
- Large one-piece rubber bumper with molded teeth
- Knurled base

Specifications

- Working pressure: 25 to 300 PSI (water only) at 70°F (21°C)

Approval

- Factory Mutual approved

Size	Thread	90° Spray GPM @ 100 PSI	Brass Part #
1-1/2"	NPSH	117	HPFN150
	NST (NH)		HPFN150NST

NOZZLES

HOSE SPRAY NOZZLES

FOG NOZZLE

NPS THREADS	
POLYCARBONATE	
	
JABO PART#	SIZE
*	3/4"
*	1"
027-71542	1-1/2"
*Non Stock-Call Jabo Supply	

Fog Nozzles

Features

- Shutoff - straight stream - fog
- Brass stem

Specification

- Maximum operating pressure: 100 PSI (water only) at 70°F (21°C)

Size	Thread	90° Spray GPM @ 100 PSI	Polycarbonate ¹ Part #	Polycarbonate ² Part #
3/4"	GHT	8.0	FNB75GHT ^{3,4}	---
	NPS	30.9	FNB75S ⁴	---
1"	NPS	11.4	FNB100S ⁴	FN100S
		30.9	HGB100S	---
1-1/2"	NPS	83.6	FNB150S	FN150S
1"	NST (NH)	11.4	FNB100NST	FN100NST
		30.9	HGB100NST	---
1-1/2"	NST (NH)	83.6	FNB150NST	FN150NST

¹ With bumper

² Without bumper

³ Standard flow

⁴ 120° spray GPM @100 PSI

NOTE: Replacement washers can be found on page 767




with bumper



without bumper

GLOBAL WASHDOWN INDUSTRIAL NOZZLE

NPSH THREADS	
BRASS	
	
JABO PART#	SIZE
027-71546	1-1/2"
*Non Stock-Call Jabo Supply	

Maximum Operating Pressure	100 PSI
Weight	1.5 lb
Break Quantity	0
Optional Package/Box Quantity	18
Size	1-1/2"
Material	Brass
Thread	NPSH
Flow	90° Spray GPM at 100 PSI = 88 (+/- 12)

NOZZLES

ACCESSORIES

NOZZLES

FEMALE PIN PLUG

NST X MALE NPT THREADS



JABO PART# SIZE

027-71530 1-1/2"

SM150F

**Non Stock-Call Jabo Supply*

Pin Lug

Female NST (NH) Thread	Male NPT Thread	Cast Brass Part #
1-1/2"	1-1/2"	SM150F
2-1/2"	1-1/2"	SM25F15T
	2"	SM25F20T
	2-1/2"	SM250F
	3"	SM25F30T
4"	4"	SM400F
Female NPSH Thread	Male NPT Thread	Cast Brass Part #
1-1/2"	1-1/2"	SM150S
2"	2"	SM200S
2-1/2"	2-1/2"	SM250S
Female Thread	Male NST (NH) Thread	Cast Brass Part #
1-1/2" NPSH	1-1/2"	SM15S15F
2-1/2" NST (NH)	3"	SM25F30F
Female Thread	Male NPT Thread	Cast Brass Part #
1-1/2" NYFD	1-1/2"	SM150NYFD
2-1/2" NYFD	2-1/2"	SM250NYFD



Rocker Lug

Female Thread	Male NPT Thread	Cast Brass Part #
1-1/2" NST (NH)	1-1/2"	RSM150F
1-1/2" NPSH		RSM150S
2-1/2" NST (NH)	2"	RSM25F20T
	2-1/2"	RSM250F
	3"	RSM25F30T

Grip-All Spanner

Features

- Fits 3/4" - 6" split lug, rocker lug, and pin lug couplings
- Can be operated in tight quarters
- Gas cock shutoff is provided in the handle; handle is shaped to fit your hand allowing a positive grip on the coupling

Aluminum
Part #

GAW



NOZZLES

FUEL NOZZLES

GRAVITY UTILITY

NOZZLE

NPT

DIE CAST ZINC ALUMINUM



027-72010	3/4"
027-72000	1"
<i>*Non Stock-Call Jabo Supply</i>	

NOZZLES

NOZZLES

FUEL NOZZLES

NOZZLES

With Trigger Hold Open Clip

JABO#	SIZE	DX #	COLOR	SERVICE
027-72020	3/4"	DN7U0BF	Black	Gasoline
027-72030	1"	DFN100F	Yellow	Diesel

With Trigger Hold Open Clip and NO Pressure no Flow Safety Valve

JABO#	SIZE	DX#	COLOR	SERVICE
027-72040	3/4"	DN7U0BF-NPNF	Black	Gasoline
027-72050	1"	DFN100F-NPNF	Yellow	Diesel

With-out Trigger Hold Open Clip

JABO#	SIZE	DX#	COLOR	SERVICE
027-72060	3/4"	DN7U0BF-NPNF	BLACK	Gasoline
027-72070	3/4"	DN7LOBF-NPNF	Green	Diesel
027-72080	1"	DFN100F-NPNF	Yellow	Diesel

Features

- With trigger hold-open clip
- Non Underwriters Listed nozzle

NPT Inlet	Spout Outlet	Approximate Flow Rate at 20 PSI (GPM)	Scuff Guard Color	Service	Part #
3/4"	13/16"	18	black	gasoline	DN7U0BF
	15/16"	23	green	diesel	DN7LOBF
1"	1-1/8"	27	yellow	diesel	DFN100F ¹

¹ Hand-guard and rear back clip: super tough nylon

Features

- With trigger hold-open clip
- With 'no pressure, no flow' safety valve

Approval

- Underwriters Listed nozzle



NPT Inlet	Spout Outlet	Approximate Flow Rate at 20 PSI (GPM)	Scuff Guard Color	Service	Part #
3/4"	13/16"	18	black	gasoline	DN7U0BF-NPNF
	15/16"	23	green	diesel	DN7LOBF-NPNF
1"	1-1/8"	27	yellow	diesel	DFN100F-NPNF

Feature

- Without trigger hold-open clip

Approval

- Underwriters Listed nozzle



NPT Inlet	Spout Outlet	Approximate Flow Rate at 20 PSI (GPM)	Scuff Guard Color	Service	Part #
3/4"	13/16"	18	black	gasoline	DN7U0BF-NC
	15/16"	23	green	diesel	DN7LOBF-NC
1"	1-1/8"	27	yellow	diesel	DFN100F-NC

With Trigger
Hold Open



1" diesel nozzle

With Trigger
Hold Open &
NO PRESSURE
NO FLOW
SAFETY VALVE



3/4" gasoline nozzle

Without
Trigger Open
& NPNF Valve



3/4" diesel nozzle