




JABO SUPPLY CORPORATION

COMPRESSED AIR
HOSE

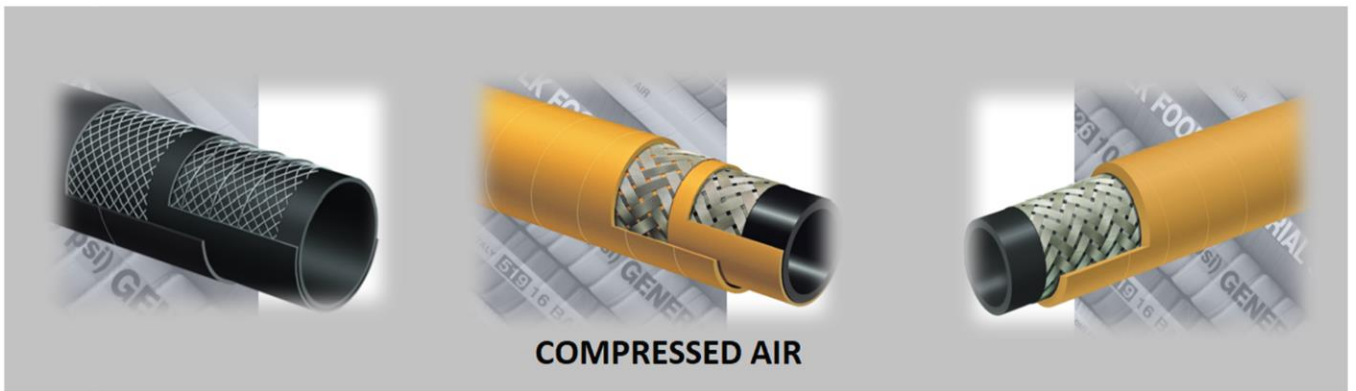

COMPRESSED AIR

JABO CAN ASSEMBLE ANY HOSE IN OUR 9,000 SQ FT HOSE SHOP

JABO SUPPLY



5 LOCATIONS

PARKERSBURG, WV

10085 Emerson Avenue 26102
(304) 464-4400

MORGANFIELD, KY

118 Jim Veatch Road, 42437
(270) 389-3430

HUNTINGTON, WV

209 Braley Street, 25705
(304) 736-8333

NORTON, VA

205 Hawthorne Drive, 24273
(276) 679-1224


BEAVER, WV (BECKLEY)

227 C&O Shop Road 25813
(304-252-0000

SINCE 1964 SERVICE IS MORE THAN A PROMISE

COMPRESSED AIR

T902AA HOT AIR BLOWER HOSE



T902AA Series

150 PSI High Quality Hot Air Blower Hose

JABO PART#	SIZE	WORKING PSI 68F/104F
*	2"	150
034-10190	3"	150
*	4"	150

***Non Stock - Call Jabo Supply**

General Applications:

Hot air transfer between the air compressor and dry bulk tank on bulk material carriers.

Construction:

Tube: Black EPDM – heat-resistant.

Reinforcement: Spiraled high tensile textile cords with flexible steel helix wire.

Cover: Black EPDM – heat, abrasion and ozone resistant.

Working Pressure:

Constant Pressure – 10 Bar (150 PSI)

Service Temperature Range:

-40°F (-40°C) to +356°F (+180°C)

Nominal Specifications

Series Number	ID (in)	ID (mm)	OD (in)	OD (mm)	Max Rec. WP (psi)	Vacuum HG (in)	Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
T902AA200	2	51	2.48	63	150	30	6	100	1.01
T902AA300	3	76	3.54	90	150	27	9	100	1.60
T902AA400	4	102	4.57	116	150	27	12	100	2.23

COMPRESSED AIR



T140AK Series

Braided Steel Wire Air Hose

AKA BULL HOSE/ BULL LINE

NON STOCK -CALL JABO SUPPLY

General Applications:

High pressure air hose for heavy-duty use in mines, quarries, construction and industry.

Construction:

Tube: Black Extruded SBR – resistant to oil mist.

Reinforcement: High tensile steel wire braids.

Cover: Yellow SBR – abrasion and ozone resistant – pin pricked.

Working Pressure:

Constant Pressure –

40 Bar (600 PSI): 1/2", 3/4", 1", 1 1/4", 1 1/2", 2"

30 Bar (450 PSI): 2 1/2", 3", 4"

Service Temperature Range:

-22°F (-30°C) to +176°F (+80°C)

Branding:


ALFAGOMMA – ITALY – T140 STEEL AIR
(embossed)

COMPRESSED AIR HOSE

Nominal Specifications

Series Number	ID (in)	ID (mm)	OD (in)	OD (mm)	Max Rec. WP (psi)	Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
T140AK050	1/2	13	0.87	22	600	2 1/2	50/100	0.28
T140AK075	3/4	19	1.10	28	600	4	50/100	0.37
T140AK100	1	25	1.34	34	600	5	50/100	0.47
T140AK125	1 1/4	32	1.65	42	600	6 1/2	50/100	0.72
T140AK150	1 1/2	38	1.89	48	600	7 1/2	50/100	0.86
T140AK200	2	51	2.52	64	600	10	50/100	1.34
T140AK250	2 1/2	63	3.03	77	450	12 1/2	50/100	1.64
T140AK300	3	76	3.54	90	450	15	50/100	1.95
T140AK400	4	102	4.65	118	450	20	50/100	2.75

COMPRESSED AIR

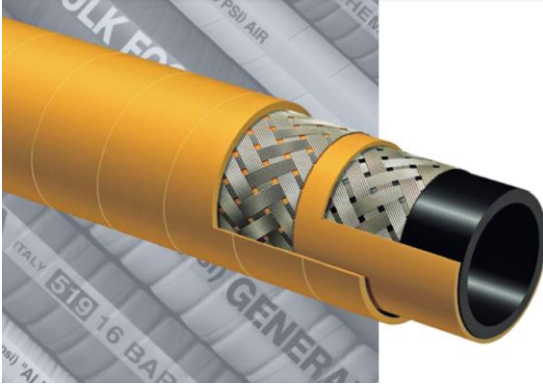

T142AK Series

High Temperature – Oil Resistant Steel Braided Reinforced Air Hose

AKA BULL HOSE/ BULL LINE

NON STOCK -CALL JABO SUPPLY

General Applications:

High pressure air for mines and quarries.
Designed for long lasting service and maximum safety in heavy duty applications where resistance to oil is required.

Construction:

Tube: Black Extruded NBR (RMA Class A) – oil mist resistant.

Reinforcement: High tensile steel wire braids.

Cover: Yellow SBR/NBR – abrasion, ozone, hydrocarbon and flame resistant – pin pricked.

Working Pressure:

40 Bar (600 PSI) 2"

30 Bar (450 PSI) 2 1/2", 3"

Service Temperature Range:

-40°F (-40°C) to +248°F (+120°C)

Branding:

ALFAGOMMA – ITALY T142 HIGH TEMP STEEL
AIR – OIL RESISTANT (embossed)

Nominal Specifications

Series Number	ID (in)	ID (mm)	OD (in)	OD (mm)	Max Rec. WP (psi)	Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
T142AK200	2	51	2.52	64	600	10	50/100	1.16
T142AK250	2 1/2	63	3.03	77	450	12 1/2	100	1.93
T142AK300	3	76	3.54	90	450	15	50/100	1.91

COMPRESSED AIR



T155AK Series

300 PSI Textile Cord

“Air Drill” Hose

NON STOCK -CALL JABO SUPPLY

General Applications:

High quality air hose for mining and construction service.

Construction:

Tube: Black SBR/NBR blend – oil mist resistant.

Reinforcement: Spiraled, high tensile textile cords.

Cover: Yellow SBR – abrasion and ozone-resistant.

Working Pressure:

Constant Pressure – 20 Bar (300 PSI)

Service Temperature Range:

-22°F (-30°C) to +176°F (+80°C)

Branding:

ALFAGOMMA – ITALY – T155 20 BAR (300 PSI)
AIR (in blue letters)

Nominal Specifications

Series Number	ID (in)	ID (mm)	OD (in)	OD (mm)	Max Rec. WP (psi)	Standard Length (ft)	Weight (lbs/ft)
T155AK050	1/2	13	0.83	21	300	50/100	0.22
T155AK075	3/4	19	1.14	29	300	100	0.38
T155AK100	1	25	1.38	35	300	50/100	0.48
T155AK125	1 1/4	32	1.73	44	300	100	0.60
T155AK150	1 1/2	38	1.97	50	300	100	0.70
T155AK200	2	51	2.56	65	300	50/100	1.12
T155AK250	2 1/2	63	3.11	79	300	50/100	1.55
T155AK300	3	76	3.62	92	300	50/100	1.89
T155AK400	4	102	4.65	118	300	50/100	2.47

MOST COMMONLY USED HOSE ENDS

CAMLOCKS

MALE CAM X HOSE BARB



FEMALE CAM X HOSE BARB

*Available in Zinc, SS, Polypropylene*

PIPE THREADS

KING NIPPLE X HOSE BARB

*Available in Zinc & SS*

VICTAULIC

*Available in 316 SS, Galvanized*

FLANGES

FLOATING FLANGE



FIXED FLANGE

*Available in Carbon Steel, SS 304, SS 316*

CHICAGO STYLE COUPLING

*Available in Zinc*

FABRICATION

